



NWC-0495 DinionXF Day/Night IP Cameras



- ▶ Advanced Day/Night camera with mechanically switching IR filter
- ▶ 15-bit DSP technology with XF-dynamic extended dynamic range
- ▶ DVD-quality up to 25/30 IPS at 4CIF
- ▶ Storage efficient tri-streaming : Dual MPEG-4 & JPEG simultaneously
- ▶ Power over Ethernet (IEEE 802.3af compliant)
- ▶ Hybrid IP camera with analog and Ethernet outputs
- ▶ Ultra-compact size

The NWC-0495 Dinion IP is a high-performance 1/3-inch CCD Day/Night network camera, designed to ensure the highest possible image quality at all times. This ultra-compact camera provides DVD-like quality MPEG-4 video at up to 25 and 30 images per second (for PAL and NTSC respectively). Dinion IP is a true hybrid camera with both Ethernet and BNC connections capable of providing direct network connection while simultaneously supporting existing analog equipment. Network video signals are sent over IP networks and can be received and displayed on a PC web browser, using the DiBos or VIDOS video management systems, or via a BOSCH Video over IP (BVIP) decoder for viewing on a CVBS or VGA monitor. The BNC connection provides direct input to a conventional analog matrix switcher or DVR, which further enhances Dinion IP's flexible viewing and recording options.

The camera combines 15-bit digital video processing (which enhances sensitivity) and XF-Dynamic (which extends the dynamic range) to provide a sharper, more detailed image with outstanding accuracy in color reproduction. Depending on the available light, the NWC-0495 automatically switches from color to monochrome, enhancing sensitivity for IR illumination to provide high-quality images even in challenging low-light conditions.

Dinion IP uses MPEG-4 compression, bandwidth throttling, and multicasting capabilities to efficiently

manage bandwidth and storage requirements while delivering the best image quality and resolution. On-screen Displays (OSD) simplify back focus adjustment and network configuration, leading to lower installation and support costs. Power over Ethernet (PoE) makes installation easier and more cost-effective because cameras can now be installed where there is no AC power outlet.

Functions

Day/Night Mode

In Day/Night Mode, the NWC-0495 provides enhanced night viewing by increasing the IR sensitivity. The IR filter can switch automatically from color to monochrome by either sensing the illumination level or via the alarm input. The filter can be switched manually via the alarm input, or remotely via a web browser. An internal, through-the-lens IR detector enhances monochrome mode stability by preventing the camera returning to the color mode when IR illumination is dominant.

XF-Dynamic

The highly accurate 15-bit digital signal is automatically processed to reveal every detail of the image in both the high-light and low-light areas of the scene simultaneously.

Video Motion Detection

The built-in video motion detector allows you to select up to four fully programmable areas with individual thresholds. The global scene change detector minimizes false alarms caused by sudden changes in lighting conditions, such as switching on or off the security lighting.

MPEG-4 Video Encoding

The Dinion MPEG-4 encoder creates high-quality streaming video at low bit rates, minimizing bandwidth and storage requirements, which further reduces costs. Each Dinion IP camera can deliver up to 25 and 30 images per second (PAL and NTSC) at true 4CIF video resolution.

Tri-streaming Video

Dinion IP cameras can generate two separate MPEG-4 video streams and one JPEG stream simultaneously. This advanced tri-streaming capability, not typically found in other IP CCTV systems, enables the user to tune live viewing and recording requirements to meet specific site and enterprise needs. For example, BOSCH Video over IP Systems (BVIP) can be configured to record video at one quality setting (e.g. 3.75IPS at 2CIF), while simultaneously providing live images at the best possible image quality (e.g. 30IPS at 4CIF). Alternatively, the system can be configured to deliver a high bandwidth MPEG-4 stream to a local LAN user, while simultaneously streaming a low bandwidth MPEG-4 stream to a remote user over a WAN connection and at the same time using the JPEG stream for remote viewing, for instance, on a PDA.

Power Options

Three power options, PoE, 24 VAC and 12 VDC, are available on the NWC-0495. Utilizing PoE makes installation easier and more cost-effective since cameras do not require a local AC power source. Additionally, they can use an uninterruptible power supply (UPS), which will allow for continuous operation even when there's a power failure e.g. in emergencies.

OSD-based Network Set-up

Network parameters and basic camera set-up (e.g. lens set-up and back focus) are quickly and easily performed using the On-screen Displays (OSD) and BNC composite video output. Unlike other IP cameras, no network connection, PC configuration utilities or other tools are required to set up Dinion IP.

Lens Wizard

The Lens Wizard automatically detects the lens type and helps focus the lens at the maximum opening to ensure proper focus is maintained throughout the 24-hour cycle. No special tools or filters are required.

Certifications and Approvals


Electro Magnetic Compatibility

| | |
|----------------|---|
| Emission EU | EN55022 class B EN 61000-3-2, EN 61000-3-3 |
| Emission USA | FCC CFR 47 part 15 class B |
| Immunity EU | EN50130-4 Alarm Systems |
| EMC Australian | AS/NZS CISPR 22 (equal to CISPR 22) |
| Vibration | Camera with 500 gr (1.1 lbs) lens according to IEC60068-2-6 |

Safety

| | |
|--------------|-----------------------------|
| EU | EN60950-1 |
| USA + Canada | UL60950-1, CAN/CSA E60950-1 |

Installation/Configuration Notes

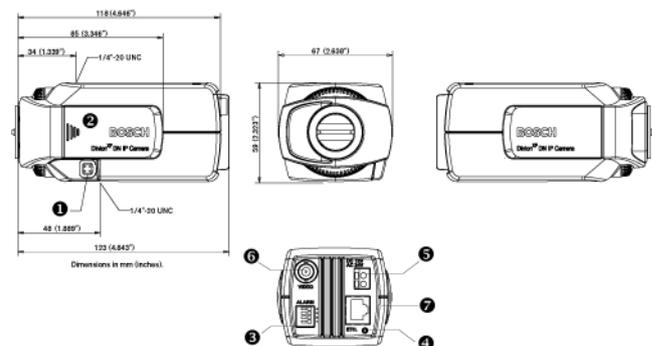

Dimensions

| | | | |
|---|----------------------------|---|-----------------------------|
| 1 | Lens connector | 5 | Power supply input |
| 2 | Control buttons | 6 | BNC Video output |
| 3 | Alarm in, Relay out | 7 | 10/100 Base-T Fast Ethernet |
| 4 | LED (power, link, traffic) | | |

Parts Included

| Quantity | Components |
|----------|--------------------------|
| 1 | Dinion IP camera |
| 1 | Spare lens connector |
| 1 | Quick installation guide |
| 1 | CD-ROM with manual |

Technical Specifications

Electrical

| | |
|------------------------------|---|
| Video Standards | MPEG-4; M-JPEG |
| Video Data Rate | 9.6 Kbps - 6 Mbps Constant & variable |
| Imager resolution | 752x582 (PAL) 768x494 (NTSC) |
| Video resolution | 704 x 576/480 (4CIF: 25/30 IPS) 704 x 288/240 (2CIF: 25/30 IPS) 352 x 576/480 (Half D1: 25/30 IPS) 352 x 288/240 (CIF: 25/30 IPS) 176 x 144/120 (QCIF: 25/30 IPS) |
| GOP Structure | I, IP |
| Overall Delay (IP) | MPEG-4: 100 ms |
| Select. Frame Rate | 1-25/30 IPS (PAL/NTSC); Field / frame based coding |
| Network Protocols | RTP, Telnet, UDP, TCP, IP, HTTP, IGMP, ICMP |
| Software Update | Flash ROM, remote programmable |
| Configuration | Via web browser, built-in web server interfaces |
| Video out | 1x Analog composite: NTSC or PAL; BNC connector 75 Ohm |
| Sensitivity ¹ | 0.59 lux (0.059 fc) (color) 0.08 lux (0.008 fc) (Night mode) |
| Min Illumination | 0.24 lux (0.024 fc) (color) 0.038 lux (0.0038 fc) (Night mode) |
| Min Illumination with SensUp | 0.024 lux (0.0024 fc) (color) 0.0038 lux (0.00038 fc) (Night mode) |
| Shutter | Auto (1/60 (1/50) to 1/500000), fixed, flickerless, default |
| Sensitivity up | Off, Automatic continuous up to 10x |
| Auto Black | On, Off selectable |
| Range | 32x dynamic range enhancement |
| Dynamic Noise Reduction | Auto, Off selectable |
| Contour | Sharpness enhancement level selectable |
| BLC | Off, Area and Level selectable |
| Gain | Auto (maximum level selectable to 28 dB) or fixed level selectable |
| Lens Mount | CS (max lens protrusion 5 mm, 0.2 inch) |
| White Balance | ATW (2500 - 10000 K), AWB hold, Manual WB selectable |
| VMD | 4 area, sensitivity selectable |
| Alarm In | +5 V nominal, +40 VDC max |
| Relay Out | max. 30 VAC or +40 VDC, Max 0,5 A continuous, 10 VA |
| Ethernet | 10/100 Base-T, auto-sensing, half/full duplex, RJ-45 |

1) 50% video signal amplitude, F1.2, scene reflectivity 89%

Environmental

| | |
|-----------------------|---|
| Input Voltage | VDC: 11-36 V (700 mA) VAC: 12-28 V (700 mA) PoE: IEEE 802.3af compliant |
| Power Consumption | Max. 8 VA |
| Weight | Approx. 0.45 kg (0.99 lb) |
| Operating Temperature | 0°C - 40°C (32°F - 104°F) |

Ordering Information

Model | Description

| | |
|---|--|
| NWC-0495-10P DinionXF Day/Night IP Camera | 1/3-inch, high performance, 540 TVL, 24 VAC / 12 VDC / PoE, 50Hz |
| NWC-0495-20P DinionXF Day/Night IP Camera | 1/3-inch, high performance, 540 TVL, 24 VAC / 12 VDC / PoE, 60Hz |

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 (0) 40 27 83955
Fax: +31 (0) 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by