

# ISC-PDL1-WC30x Professional Series TriTech Curtain Detectors

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ 30 m (100 ft) x 2.6 m (8.5 ft)
- ▶ 2.1 m to 3 m (7 ft to 10 ft) mounting height, no adjustments required, optional lockdown masking
- ▶ EN50131-2-4 Grade 2 compliant
- ▶ Sensor data fusion technology
- ▶ Range adaptive radar and active white light suppression

The Professional Series TriTech Curtain Detectors are exceptionally suited for commercial indoor applications. Sensor data fusion technology ensures that the detector sends alarm conditions based on precise information. The powerful combination of unique features in the Professional Series delivers superior catch performance and virtually eliminates false alarms.

The self-locking two-piece enclosure, built-in bubble level, flexible mounting height, and three optional mounting brackets simplify installation and reduce service time.

## Functions

### Sensor Data Fusion Technology

Sensor data fusion technology is a unique feature that uses a sophisticated software algorithm to gather signals from five sensors: two pyroelectric sensors, a range adaptive radar sensor, a room temperature sensor, and a white light level sensor. The microcontroller analyzes and compares the sensor data to make the most intelligent alarm decisions in the security industry.

### Range Adaptive Radar

The microwave transceiver automatically adjusts its detection thresholds based on input from the PIR sensors. Integrating the target distance information from the PIR significantly reduces false alarms from the microwave Doppler radar.

### Active White Light Suppression

An internal light sensor measures the level of light intensity directed at the face of the detector. Sensor data fusion technology uses this information to eliminate false alarms from bright light sources.

### Dynamic Temperature Compensation

The detector automatically adjusts PIR sensitivity to identify human intruders at critical temperatures. Dynamic temperature compensation detects human body heat accurately, avoids false alarms, and delivers consistent catch performance at all operating temperatures.

### Cover and Wall Tamper Switch

When an intruder removes the cover or attempts to separate the detector from the wall, a normally-closed contact opens to alert the control panel.

### Self-adjusting LEDs

The LED brightness adjusts automatically to the surrounding light level. A blue light-emitting diode (LED) indicates TriTech+ alarms and activates during a walk test. A yellow LED indicates microwave detection, and a red LED indicates PIR detection.

### Remote Walk Test LED

Users can enter a command through a keypad, a control center, or programming software to remotely enable or disable the walk test LED.

### Alarm Memory

Alarm memory flashes the alarm LED to indicate stored alarms for use in multiple unit applications. A switched voltage from the control panel controls the alarm memory.

### Solid State Relays

Solid state relays send silent alarm output signals to provide a higher level of security and reliability. An external magnet does not activate the relay. The solid state relay uses less current than a mechanical relay, providing longer standby capacity during a power loss.

### Draft, Insect, and Small Animal Immunity

The sealed optic chamber provides immunity to drafts and insects, reducing false alarms. Small animal immunity reduces false alarms caused by animals less than 4.5 kg (10 lb), such as rodents.

### Remote Self Test

A remote self test initiates when the walk test input switches to its true state. The alarm relay and alarm LED activate for four seconds following a successful test. The trouble relay activates, and the alarm LED flashes following a failed test.

### Input Power Supervision

When the power is lower than 8 V, a low input power trouble condition activates the trouble relay and causes the LED to flash. The trouble condition clears automatically when power reaches or exceeds 8 V.

### Trouble Memory

When the walk test input switches to its true state for less than two seconds, the LED flashes to indicate the most recent trouble condition. If there is no trouble in memory, the LED does not flash. After twelve hours, or after the detector receives a second walk test pulse for two seconds or less, the LED stops flashing and the trouble memory clears.

### DIP Switch Programming

The following functions are all programmed using DIP switch settings:

- Local Walk Test LED
- Remote Walk Test Input Polarity
- Alarm Memory Polarity
- MANTIS Anti-mask On and Off

### Certifications and approvals

Europe	EN	50131-5 Environmental Class II
		50102 IK04
		60529 IP41
	WEEE	Waste Electrical and Electronic Equipment Directive


The detectors are designed to also comply with requirements of:

USA	FCC	Complies with Part 15
-----	-----	-----------------------

Region	Certification	
Australia	RCM	
Europe	CE	2004/108/EC EMC Directive (EMC); 2006/95/EC Low-Voltage Directive (LVD); 1999/5/EC Radio equipment and Telecommunications Terminal Equipment (R&TTE); 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS) [-WC30G, -WC30H]
	EN50131	EN 50131-2-4: 2008, Grade 2
Belgium	INCERT	B-509-0052/f [-WC30G]
France	AFNOR	2820200005 [-WC30G]
	AFNOR	2820200005 [-WC30H]
Sweden	INTYG	Nr11-780 [-WC30G]
Brazil	ANATEL	1772-11-1855 [-WC30G]

### Installation/configuration notes

#### Coverage Patterns

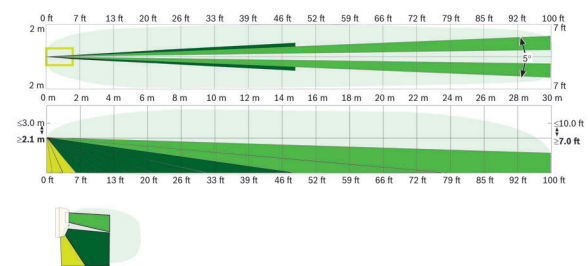

**Standard Curtain Coverage 30 m x 2.6 m (100 ft x 8.6 ft)**

#### Mounting Considerations

The recommended mounting height is 2.1 m to 3 m (7 ft to 10 ft).

Use an optional B328 Gimbal-mount Bracket or B335 Low-profile Swivel-mount Bracket to surface mount the detector on a flat wall or in a corner.

Use an optional B338 Universal Ceiling Bracket to mount the detector on the ceiling.

#### Wiring Considerations

Recommended wire size is 0.2 mm<sup>2</sup> to 1 mm<sup>2</sup> (26 AWG to 16 AWG).

### Parts included

Quantity	Component
1	Detector
1	Hardware pack containing 2 flat-head screws, 2 screw anchors, and a nylon cable tie
1	Literature pack <ul style="list-style-type: none"> <li>• Installation Guide</li> </ul>

### Technical specifications

#### Electrical

##### Power Requirements

Voltage (Operating):	9 VDC to 15 VDC
Current (Maximum):	< 26 mA with alarm, trouble, and LEDs active.
Current (Standby):	18 mA at 12 VDC

##### Outputs for both Models

Tamper:	Normally-closed (NC) contacts (with cover on) rated at 25 VDC, 125 mA maximum. Connect tamper circuit to 24-hour protection circuit.
Trouble:	Solid state relay normally-closed (NC) contacts.
Alarm:	Solid state relay, normally-closed (NC) contacts, power supervised. 3 W, 125 mA, 25 DC, resistance < 10 Ω.

#### Mechanical

##### Enclosure Design

Color:	White
Dimensions:	127 mm x 69 mm x 58 mm (5 in. x 2.75 in. x 2.25 in.)
Material:	High-impact ABS plastic

##### Indicators

Alarm Indicator:	<ul style="list-style-type: none"> <li>• Blue LED for TriTech+ alarms</li> <li>• Yellow LED for microwave detection</li> <li>• Red LED for PIR detection</li> </ul>
------------------	---

##### Zones

Zones:	28
--------	----

#### Environmental

Relative Humidity:	0 to 95%, non-condensing
Temperature (Operating and Storage):	-30°C to +55°C (-22°F to +130°F) <i>For AFNOR certificated installations,</i> -10°C to +55°C (+14°F to +130°F) <i>For UL Certificated installations, 0°C to +49°C (+32°F to +120°F)</i>

Environmental Rating (EN 50130-5):	Class II
Protection Rating (EN 60529, EN 50102):	IP41, IK04

### Ordering information

#### ISC-PDL1-WC30G Professional Series TriTech Curtain Detector (30 m, 10.525 GHz)

Provides PIR and microwave, 30 m x 3 m (100 ft x 10 ft) coverage.

Order number **ISC-PDL1-WC30G**

#### ISC-PDL1-WC30H Professional Series TriTech Curtain Detector (30 m, 10.588 GHz)

Provides PIR and microwave, 30 m x 3 m (100 ft x 10 ft) coverage. For use in France and the United Kingdom.

Order number **ISC-PDL1-WC30H**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com