


BOSCH

Invented for life

MX794i Long Range Multiplex PIR Detector



- ▶ **Interchangeable mirror modules**
- ▶ **Mounting bracket supplied**
- ▶ **Selectable sensitivity**
- ▶ **Built-in tamper switch**

The MX794i is a PIR intrusion detector that provides a variety of coverage patterns through the use of interchangeable mirror modules. It is designed to connect to the Multiplex Bus of a control panel and optionally to an auxiliary 12 VDC power source. It is compatible with DS7400, DS7400X, or DS7400Xi Series Control Panels, with a DS7430 or DS7436 Multiplex Expansion Module, or with GV2 and G Series Control Panels with a D8125MUX Module installed.

Note The DS7400 and DS7400X require ROM version 1.07 or greater.

Functions

Interchangeable, Pointable Mirrors

The detector comes with a standard broad pattern mirror and two optional mirrors are available: a long-range pattern mirror and a barrier pattern mirror. To change the mirror, just pull it out from its resting grooves. The mirrors are adjustable from +1° to -18° vertically by sliding the mirror forward or back and ±10° horizontally by rocking the mirror side to side.

Selectable sensitivity

Selectable for Standard, Intermediate or High:

- **Standard:** Tolerates environment extremes on this setting. Not recommended for OA200 coverage.

- **Intermediate:** The recommended setting for OA200 coverage or for locations where an intruder is expected to cover only a small portion of the protected area. Tolerates normal environments on this setting.
- **High:** The setting for fast response to intruder signals. For use in quiet environments where thermal and illumination transients are not anticipated.


Internal Tamper Switch

The internal tamper switch sends a signal to the panel's Multiplex Bus for display at the keypad when the detector's cover is removed.

Certifications and Approvals

| Region | Certification | |
|--------|---------------|--|
| Europe | CE | 89/336/EEC, EN55022: 1998, EN50130-4: 1995, EN60950: 2000, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11 |
| USA | UL | ANSR: Intrusion Detection Units (UL639) |


Installation/Configuration Notes

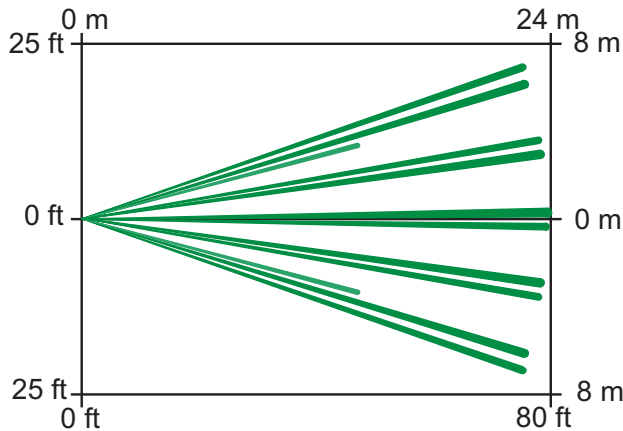

Top View
A80 Mirror Module: 24 m x 15 m (80 ft x 50 ft)




Side View
A80 Mirror Module: 24 m x 15 m (80 ft x 50 ft)

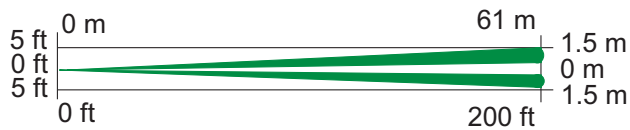


Top View
A200 Mirror Module: 61 m x 3 m (200 ft x 10 ft)



Side View
A200 Mirror Module: 61 m x 3 m (200 ft x 10 ft)

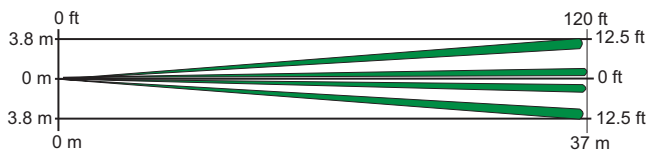

Top View
Optional A120 Mirror Module: 37 m x 8 m (120 ft x 25 ft)



Side View
Optional A120 Mirror Module: 37 m x 8 m (120 ft x 25 ft)

Coverage Information

The recommended mounting height is:

- 3.1 m (10 ft) for the A200 mirror
- 2.3 m (7.5 ft) for the A80 and A120 mirrors

Mounting Considerations

The detector may be surface or corner mounted, but use of the B334 Mounting Bracket (included) is strongly recommended. Because variations exist in the surfaces of most mounting walls, most units are not mounted at perfect angles to the floor or walls. This may cause the pattern to point away from the "ideal" direction. To ensure proper catch performance, mounting the detector on a bracket permits the flexibility needed to adjust the direction of the coverage pattern.

Misalignment of the detector when using an optional mounting bracket might reduce the range and increase dead zones.

Wiring

Do not use shielded cable. Use wire no smaller than 0.8 mm (#22 AWG) to connect the detector to the control panel.

Technical Specifications

Environmental Considerations

Temperature (Operating): -29°C to +49°C (-20°F to +120°F). *For UL Listed Requirements, the temperature range is 0°C to +49°C (+32°F to +120°F).*

Power Requirements

Current Draw (2-wire):

| | |
|-------------------|--------------------------|
| LED Off: | < 350 µA draw on mux bus |
| In Alarm; LED On: | 2 mA draw on mux bus |

Current Draw (4-wire):

| | |
|-------------------|---|
| LED Off: | < 350 µA draw on mux bus, 0 mA draw on Aux. power |
| In Alarm; LED On: | < 350 µA draw on mux bus, 3 mA draw on Aux. power |

Standby Power: There is no internal standby battery. Connect to DC power sources capable of supplying standby power if primary power fails. For each hour of standby time needed, 350 µAh are required. *For UL Listed Requirements, 1400 µAh (4 hrs.) minimum is required.*

Voltage (Input): 12 VDC from panel's mux bus and optionally from an auxiliary power supply.

Ordering Information**MX794i Long Range Multiplex PIR Detector** **MX794i**

Provides a variety of coverage patterns through the use of interchangeable mirror modules

Accessories**OA120-2 Mirror** **OA120-2**

A 36.5 m (120 ft) optical array module. Shipped in packages of two.

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by