




8-10 Clos Menter z Excelsior Business Park z Cardiff z United Kingdom z CF14 3AY
Tel: +44 (0)29 20520022 z Fax: +44 (0)29 20520178
email:sales@mraccess.com z www.mraccess.com

MULTIPROX - 1000 SINGLE DOOR ACCESS CONTROL

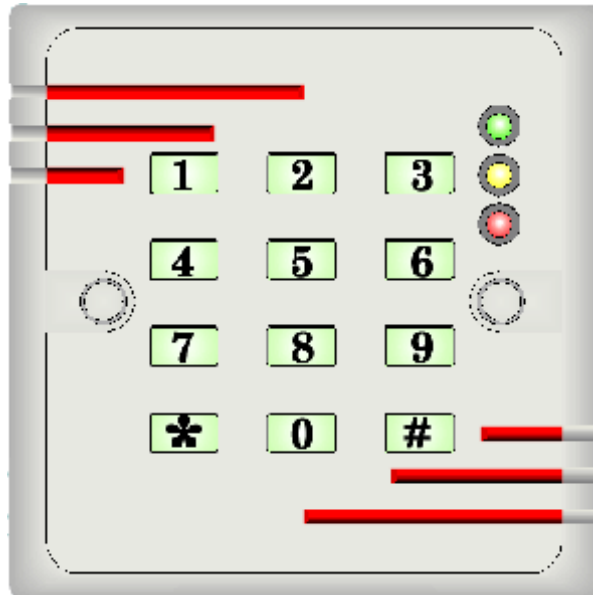

The Multiprox -1000 is a highly integrated standalone access control reader/system for up to 1000 users. The unit is easily programmable on site via the inbuilt backlit keypad. Designed to be mounted on a single gang electrical outlet box, it provides all the features required for a complete access control system. The electronics is fully encapsulated against the ingress of moisture, suitable for outdoor use.

FEATURE RANGE



- 1000 cards/tags
- Easily programmable on site using keypad
- 4 or 6 digit user/programming codes
- Duress feature on all user codes (code+1)
- 1 relay and 3 transistor outputs
- Programmable clock & data output
- RS232 printer output
- 256 event buffer
- Backlit push-button keypad
- 3x7 day programmable time slots
- Output programmable for each card/tag
- 2 lines programmable as I/O
- Door open monitor
- Door release input
- Fire alarm override input
- Audible indication
- Tamper detector
- Code tamper lockout (5 minutes)
- Fits standard 1 gang electrical outlet box

TECHNICAL SPECIFICATIONS

SUPPLY VOLTAGE	+10.8 to 16Vdc
SUPPLY CURRENT	Quiescent 60mA Operating: 120mA
TEMPERATURE	-30 to +50°C
HUMIDITY	0 to 90% rh (non-condensing)
OUTPUTS	Voltage free contacts N/O or N/C 3.0A Open collector outputs 100mA max sink RS232 - 2400 baud, 8 bit, no parity, 1.5 stop bits
CABLE	0.8m, 8 core unscreened cable
SIZE	Width=86mm Height= 86mm Depth=20mm

standard 1 gang

(Surface mounts using electrical outlet box)

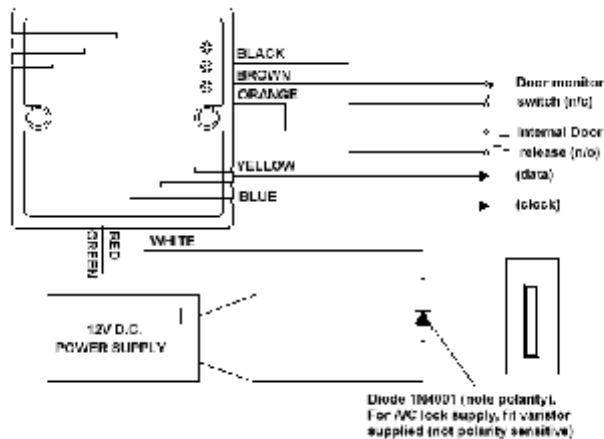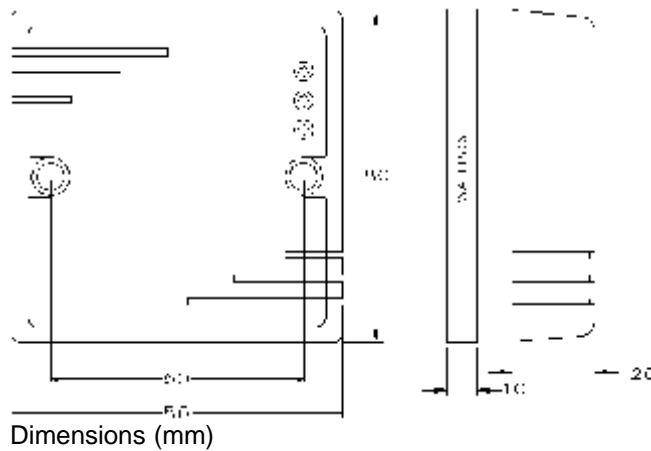

Typical Installation

ORDERING INFORMATION

AMP100	100 user Multiprox c/w master cards
AMP1000	1000 user Multiprox c/w master cards
PC1	Proximity user card
MQK1P-S100	Multiprox 100 kit c/w 12V electric strike, psu, exit button, 50 cards, user and installation manuals
MQK1P-M1000	Multiprox 1000 kit c/w 12V electro-magnetic lock, psu, exit button, break glass unit, 50 cards, user and installation manuals