

> FPS

Fence protection systems

DESCRIPTION – The FPS (Fence Protection System) strain sensitive cable sensor system detects mechanical disturbances on the fence caused by cutting, climbing or lifting. Advanced signal processing extracts the maximum amount of data from the fence. More information means better alarm decisions.

APPLICATION – The FPS cable can be easily installed on most fences. It can be directly attached to the fence without weaving the cable in and out of the fence fabric. The cable is terminated at the far end where it connects to the processor.



Features

- Advanced signal processing
- Independent detection of fence cutting, climbing and lifting
- Terrain following sensor
- Audio assessment of alarms
- Optional armored sensor cable available
- Dual zone (2) processor

Benefits

- High Probability of detection (Pd)
- Quick and easy to install or repair
- Environmental nuisance alarms virtually eliminated

Markets

- Airports
- Borders
- Seaports
- Electric and gas refineries
- Correctional facilities
- Commercial and industrial sites
- Communications sites
- Special operations

FPS

Fence protection systems

How it works

The FPS processor connects to two transducer sensor cables, and is mounted on or near the fence in the middle of two detection zones (left and right). Mechanical disturbances detected by the sensor cable are sent to the FPS processor. The processor contains the circuitry that analyzes the detected disturbance. The electronics are designed to match the characteristics of the sensor cable input and only report as events those signals that are similar to the disturbances caused by climbing, cutting or lifting the fence fabric.

The FPS processor "looks" at a broad spectrum of frequencies: 80 Hz to 3000 Hz. Enabling the processing logic to recognize the signals generated by a climb (low frequency) to the signals generated by a cut (high frequency). The signals generated by these events can shift based on environmental factors, i.e., temperature, wind, rain, etc., as well as the tension of the fence fabric and the gauge of wire. These factors may or may not affect the fence.


Electret Transducer - standard sensor cable

The transducer sensor cable is a 0.138 in. (3.5 mm) coaxial cable specially manufactured with a permanent electrical charge throughout its entire length. The charge is stored within the cable in the dielectric material.



The transducer cable is then able to act as a long extended capacitor microphone for which the applied bias voltage is supplied internally. Any movement in the fence causes a small voltage to appear at the sensor cable output. The transducer sensor cable is equally sensitive over the entire zone length. Senstar tests every foot of cable for sensitivity and provides a chart recording the results. With this method of testing, you are assured the sensor works before incurring the labour required to place the cable on the fence. The outer jacket of the cable

is a high density polyethylene rugged material that is resistant to ultraviolet rays. The MEX model connected directly to the zone processor card with a plug removable terminal block.

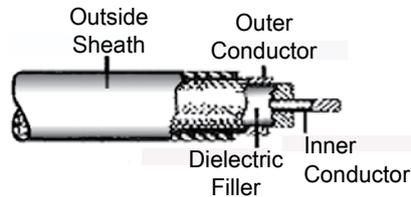

Features:

- Equal sensitivity and easy to repair
- Linear sensor - tailor sensitivity as required
- Flexibility - change zone configurations easily

Helisensor - ruggedized transducer sensor cable

The Helisensor is the electret transducer sensor cable encased in a 0.56 in. (1.4 cm) flexible metallic jacket, designed for use with the Senstar FPS series of signal processors. Helisensor is designed to be used in demanding areas where vandalism may be a problem or industrial sites where physical damage can occur, and can be attached to razor ribbon, concertina or barbed wire. Helisensor is available in 328 ft. (100 m) lengths which can be coupled together for longer zones up to 984 ft. (300 m) each. Special hardware is included for end-of-line terminations and splicing. Helisensor can be installed on a standard chain link fence using the outdoor plastic cable ties provided or with optional stainless steel ties. A minimum bend radius of less than 3 in. (7.62 cm) provides for service loops and sensitivity enhancing arrangements.



Helisensor features:

- Armored sensor cable
- Protects from physical damage and vandalism
- Easy to install
- Can be used on "razor ribbon"

FPS processors

The FPS dual zone processors are configured into four models. One with relay outputs; three using multiplexed communication.

The FPS-2-2R (Relay) - see data sheet. The three multiplex models are:

- FPS-2-2M
- FPS-2-2M/AP
- FPS-5

The FPS dual zone processors contain two zone processor cards, 1 main board and 1 transponder. The zone processor cards each have adjustments for the sensitivity of that particular zone. The processor cards are interchangeable. The alarm threshold (count setting) is set in software in the MX Control Unit for the FPS-2-2M/AP and FPS-5. For the FPS-2-2M model, the alarm threshold is set with a dip switch on the zone card.

Each tamper proof solid-state dual zone processor controls two 1000 ft. (305 m) zones. The plug-in circuit cards facilitate field diagnostics by simply exchanging boards.

The FPS dual zone processor has built-in lightning protection on all input and output lines utilizing gas discharge tubes and transient bypasses. The processor housings are made of cast aluminum with all openings gasketed and sealed for a weather-tight fit.

The processor and signal cable will initiate a tamper alarm by removing the cover or cutting or shorting the sensor cable. The tamper signal is sent by the processor to the alarm monitoring and control unit.

Each zone processor provides an audio representation of the signal received through the sensor cable. This audio signal is multiplex switched on alarm or manually switched onto an audio BUS to enable the control room personnel to hear the activity on the fence and assess the situation. The patented process used by Senstar to produce our electret cable provides a very "quiet" ambient noise level which results in a very clear audio signal from the sensor. The differential

between quiet and alarm also provides a very high signal to noise ratio which is very important in reducing nuisance alarms.

FPS-2-2M and FPS-2-2M/AP

The FPS-2-2M processors communicate with the MX Multiplex Control Unit or the Data Collection Unit (DCU) via the multiplex transponder built into the processor. The communication is bi-directional from the MX or DCU utilizing the exclusive Senstar CEnDe communications protocol. Control functions are received from the MX or DCU unit and sensor status messages are returned to the MX or DCU. All of the communication functions are performed on a single pair of wires daisy-chained from processor to processor.

FPS-2-2M - signal processor

The FPS-2-2M processor zone cards have both a sensitivity adjustment for each zone and a count setting for each zone. The standard FPS processing uses pattern recognition to determine those signals that represent a threat versus those generated by other sources such as wind, rain, etc.

The FPS-2-2M processor can be upgraded to an advanced processing unit by simply reconfiguring on-board jumpers. Please consult the factory.

FPS-2-2M/AP - advanced signal processor

Most systems make the alarm decision in the processor utilizing the information from one or two zones. The EDAPT (Environmentally Derived Adaptive Processing Techniques) installed in the MX and the DCU uses the environmental effects being experienced by all of the zones on the system in the alarm decision process. The alarm threshold is set in software at the MX or DCU. This technique maintains a high Pd while greatly reducing the nuisance alarm rate.

FPS-5 - advanced signal processor with integrated fiber optic communications

The FPS-5 processor contains a fiber optic transponder that sends the detected events via a fiber optic network to the MX or the DCU which allows multiplexing or bi-directional communications over a redundant ring of fiber.



Each FPS-5 processor validates the communication packet before re-transmitting the information to the next processor. The FPS-5 audio signal is digitized and interleaved with the data packets on the same fiber optic cable. This technique eliminates the need for a dedicated audio BUS.



Technical Specifications

ELECTRET TRANSDUCER CABLE

TYPE:

- Two conductor coaxial
- Outside diameter: 0.138 in. (3.5 mm)
- Life expectancy: 10 years
- Half life sensitivity: 40 years

REPAIR:

- Copper shielded transducer service kit
- No heat gun or soldering required

SUPERVISION:

- Constant impedance monitoring
- EOL kit provided with cable

ATTACHMENT:

- Ultraviolet resistant cable ties furnished with cable

HELISENSOR

TYPE:

- Outside diameter: 0.56 in. (1.4 cm)

CONNECTION / ATTACHMENT:

- Conduit fitting on processor enclosure
- Ultraviolet resistant cable ties furnished with cable

SUPERVISION:

- Constant impedance monitoring
- EOL kit provided with cable

FPS-2-2M AND FPS-2-2M/AP

CIRCUIT COMPONENTS: 100% solid state on plug-in circuit boards

TAMPER ALARM ACTUATION: Activated by either enclosure switch or transducer cable fault (shorting or cutting)

REMOTE TESTING: Built-in self-test generator simulates actual intrusion signals

INPUT POWER ISOLATION: Built-in DC to DC converter allows isolated signal and power grounds

AUDIO ASSESSMENT: Audio information from transducer cable is provided and multiplex switched to isolate audio BUS

POWER REQUIREMENTS:

- +12.0 to 16.0 VDC, 30 mA, Ripple ± 0.5 Vpp
- Provided by the MX series control unit

WIRE ENTRY:

- 0.75 in (1.9 cm) flexible weather-proof conduit fitting for power and alarm cables
- Gasketed compression bulkhead fitting for transducer cables

WEATHERPROOFING:

- Cast aluminum enclosure
- 0.25 in. (6.3 mm) minimum thickness
- All openings gasketed and sealed
- Conformal coated circuit boards, lightning protection
- Input / output lines protected by gas discharge arrestors and / or transorbs (90 V, 5000 Amp)

OPERATING TEMPERATURE: -40°F to +158°F (-40°C to +70°F)

SIZE: 9 W x 8 H x 4.5 in. D (23 W x 20 H x 11 cm D)

WEIGHT:

- 7 lbs. (3.2 kg)
- Excess of 40,000 hours MTBF

FPS-5

TAMPER ALARM ACTUATION: Activated by either enclosure switch or transducer cable fault (shorting or cutting)

REMOTE TESTING: Built-in self-test generator simulates actual intrusion signals

INPUT POWER ISOLATION: Built-in DC to DC converter allows isolated signal and power grounds

POWER REQUIREMENTS:

- 12 - 24 VDC, 140 mA

OPERATING TEMPERATURE: -40°F to +158°F (-40°C to +70°F)

ENCLOSURE:

- Cast aluminum

SIZE: 9 W x 8 H x 4.5 in. D (23 W x 20 H x 11 cm D)

WEIGHT:

- 7 lbs. (3.2 kg)

Specifications are subject to change without prior notice.



ISO 9001:2000
CGSB Registered Certificate 95711
Version: DAS-G2/A-IN-R2-E-09/09

Copyright ©2009. All rights reserved. Features and specifications are subject to change without notice.
The Senstar logo and name are trademarks of Senstar Corporation.

Senstar is represented by dealers in over 80 countries.

www.senstar.com