


## Input/Output Modules

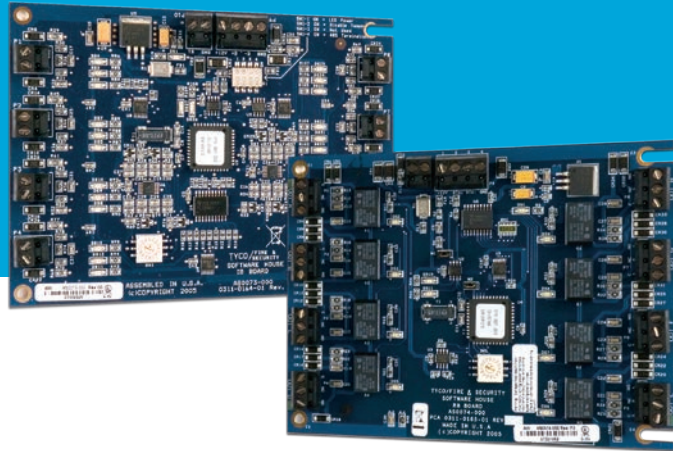

### Features That Make a Difference:

- Provides cost-effective expansion of input and output capacity
- Compatible with full range of Software House iSTAR and apC access control panels
- Locate modules up to 1,220 m (4,000 ft) away from controllers using flexible two-wire RS-485 RM bus
- Reduces length of sensor and control wiring to save installation costs
- I8 provides eight Class A supervised inputs
- R8 provides eight Form C relay outputs
- I8-CSI, configurable supervised input model, allows use of existing input wiring without changing end-of-line (EOL) resistors
- Three status LEDs per input (red/yellow/green) and one per output enable quick diagnostics and troubleshooting
- Small, modular size requires minimal panel space
- Dedicated tamper input included on each module
- Optional UL-listed enclosure available

The Software House I8, R8, and I8-CSI modules provide a flexible, cost-effective means to expand the input and output functionality of any iSTAR or apC access controller. Common applications include alarm monitoring and control and elevator control.

The I8 input module provides eight Class A supervised inputs. Three LEDs per input help the installer commission and troubleshoot each input circuit – red if the input is in alarm, green for normal, and yellow for a supervision error. LEDs may be turned off via a DIP switch setting.

The I8-CSI module enhances the functionality of the standard I8 module by supporting numerous supervised circuit types and EOL resistance values. This allows the I8-CSI to accommodate existing field wiring without changing EOL resistors. More than 20 different circuit types are supported. The circuit type is selected via a bank of DIP switches and applies to all eight inputs on the I8-CSI.

The R8 output module provides eight Form C dry contact relay outputs. A red status LED per output shows the state of the relay.

All modules feature a dedicated input for an external cabinet tamper switch and mount easily in the Software House RM-CAN or RM-DCM-CAN enclosure. The modules communicate with iSTAR or apC controllers via the two-wire RM bus that allows total wiring distances of up to 1,220 m (4,000 ft). Up to eight I8s and eight R8s can be connected to each apC, iSTAR eX, and iSTAR Pro eight-reader model; up to 16 of each module can be connected to the iSTAR Pro 16-reader model.

The modules are fully compatible with both C•CURE 800/8000 and C•CURE 9000.

## Specifications


- General**  
 Dimensions (H x W) . . . . . 11.0 x 15.0 cm (4.3 x 5.9 in)  
 Environmental . . . . . 0° to 50° C (32° to 122° F);  
 5 to 85% relative humidity, non-condensing  
 Power Input Voltage . . . . . 12 VDC +/- 10%  
 Tamper . . . . . Dedicated input for external tamper switch  
 Weight . . . . . 0.23 kg (8 oz)  
 Regulatory . . . . . UL 294, UL 1076, FCC Part A, CE,  
 EN 50133, RoHS
- I8 Input Module**  
 Power Requirements . . . . . 180 mA @ 12 VDC  
 Inputs . . . . . Eight Class A supervised  
 LEDs per Input . . . . . Red (alarm), green (normal), yellow  
 (supervision error)
- I8-CSI Input Module**  
 Power Requirements . . . . . 180 mA @ 12 VDC  
 Inputs . . . . . Eight Class A supervised, configurable via  
 DIP switch  
 LEDs per Input . . . . . Red (alarm), green (normal), yellow  
 (supervision error)  
 Circuits Supported . . . . . Single resistor: 1K, 5K, 10K  
 Double resistor: 1K, 5K, 10K,  
 1K/2K, 6.8K/18K, 200/10K  
 Unsupervised: NO, NC
- R8 Output Module**  
 Power Requirements . . . . . 45 mA @ 12 VDC plus 32 mA per active relay  
 Outputs . . . . . Eight Form C dry contact relays  
 LED Per Output . . . . . Red (relay active)  
 Relay Contact Ratings . . . . . 30 VDC, 2.0 A resistive  
 30 VDC, 1.0 A inductive  
 125 VAC, 0.4 A
- Optional Metal Enclosures with Tamper Switch**  
**RM-DCM-CAN**  
 Dimensions . . . . . 356 x 305 x 89 mm (14 x 12 x 3.5 in)  
 Capacity . . . . . Up to four input or output modules  
**RM-CAN**  
 Dimensions . . . . . 210 x 184 x 83 mm (8.25 x 7.25 x 3.25 in)  
 Capacity . . . . . One input or output module
- Ordering Information**

Model Numbers	Description
AS0073-000	I8 input module
AS0073-CSI	I8-CSI input module
AS0074-000	R8 output module
RM-DCM-CAN	Large metal enclosure with tamper switch
RM-CAN	Small metal enclosure with tamper switch

## Wiring Summary

Signal	From	To	Belden #	Gauge	# of Pairs	Shielded	Maximum Length
Comm (two-wire RS-485)	apC/iSTAR	I8/R8	9841*	24	1	Yes	1,220 m (4,000 ft)
Power	apC/iSTAR	I8/R8	9841*	24	1	No	Based on voltage drop
Control Point	R8	Strike, Siren, etc.	8442/8461	18	1	No	Based on voltage drop
Supervised Input	I8	REX or Door Contact	8442/8461	22/18	1	No	610 m (2,000 ft)

## Wiring Configuration Diagram

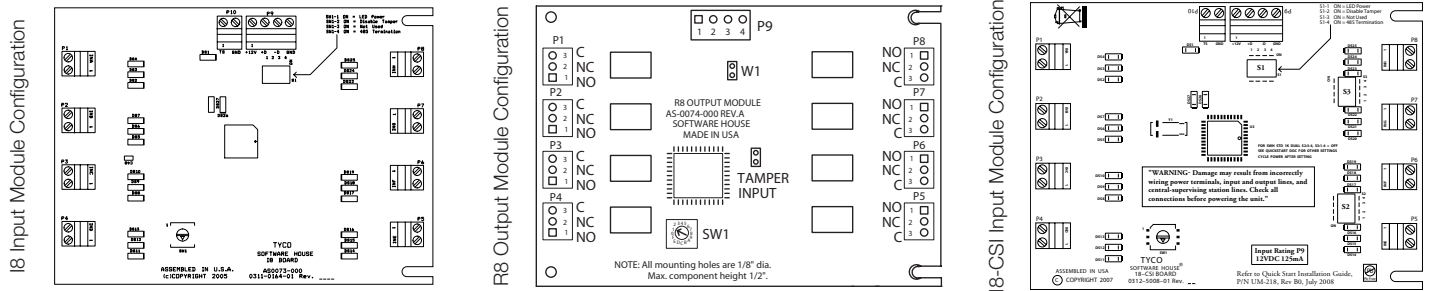

(\*) For plenum or underground applications, use Belden 89182 for one pair 22 AWG, 100 ohm 12.95 pf/ft.

Note: Control, supervised, and unsupervised input cables must be shielded for FCC Class B operation.

## Related Products



C•CURE 9000

iSTAR Controllers

Readers

## Approvals



www.swhouse.com