SmaX

Web Based Controlled, Multi-Site Access Control System

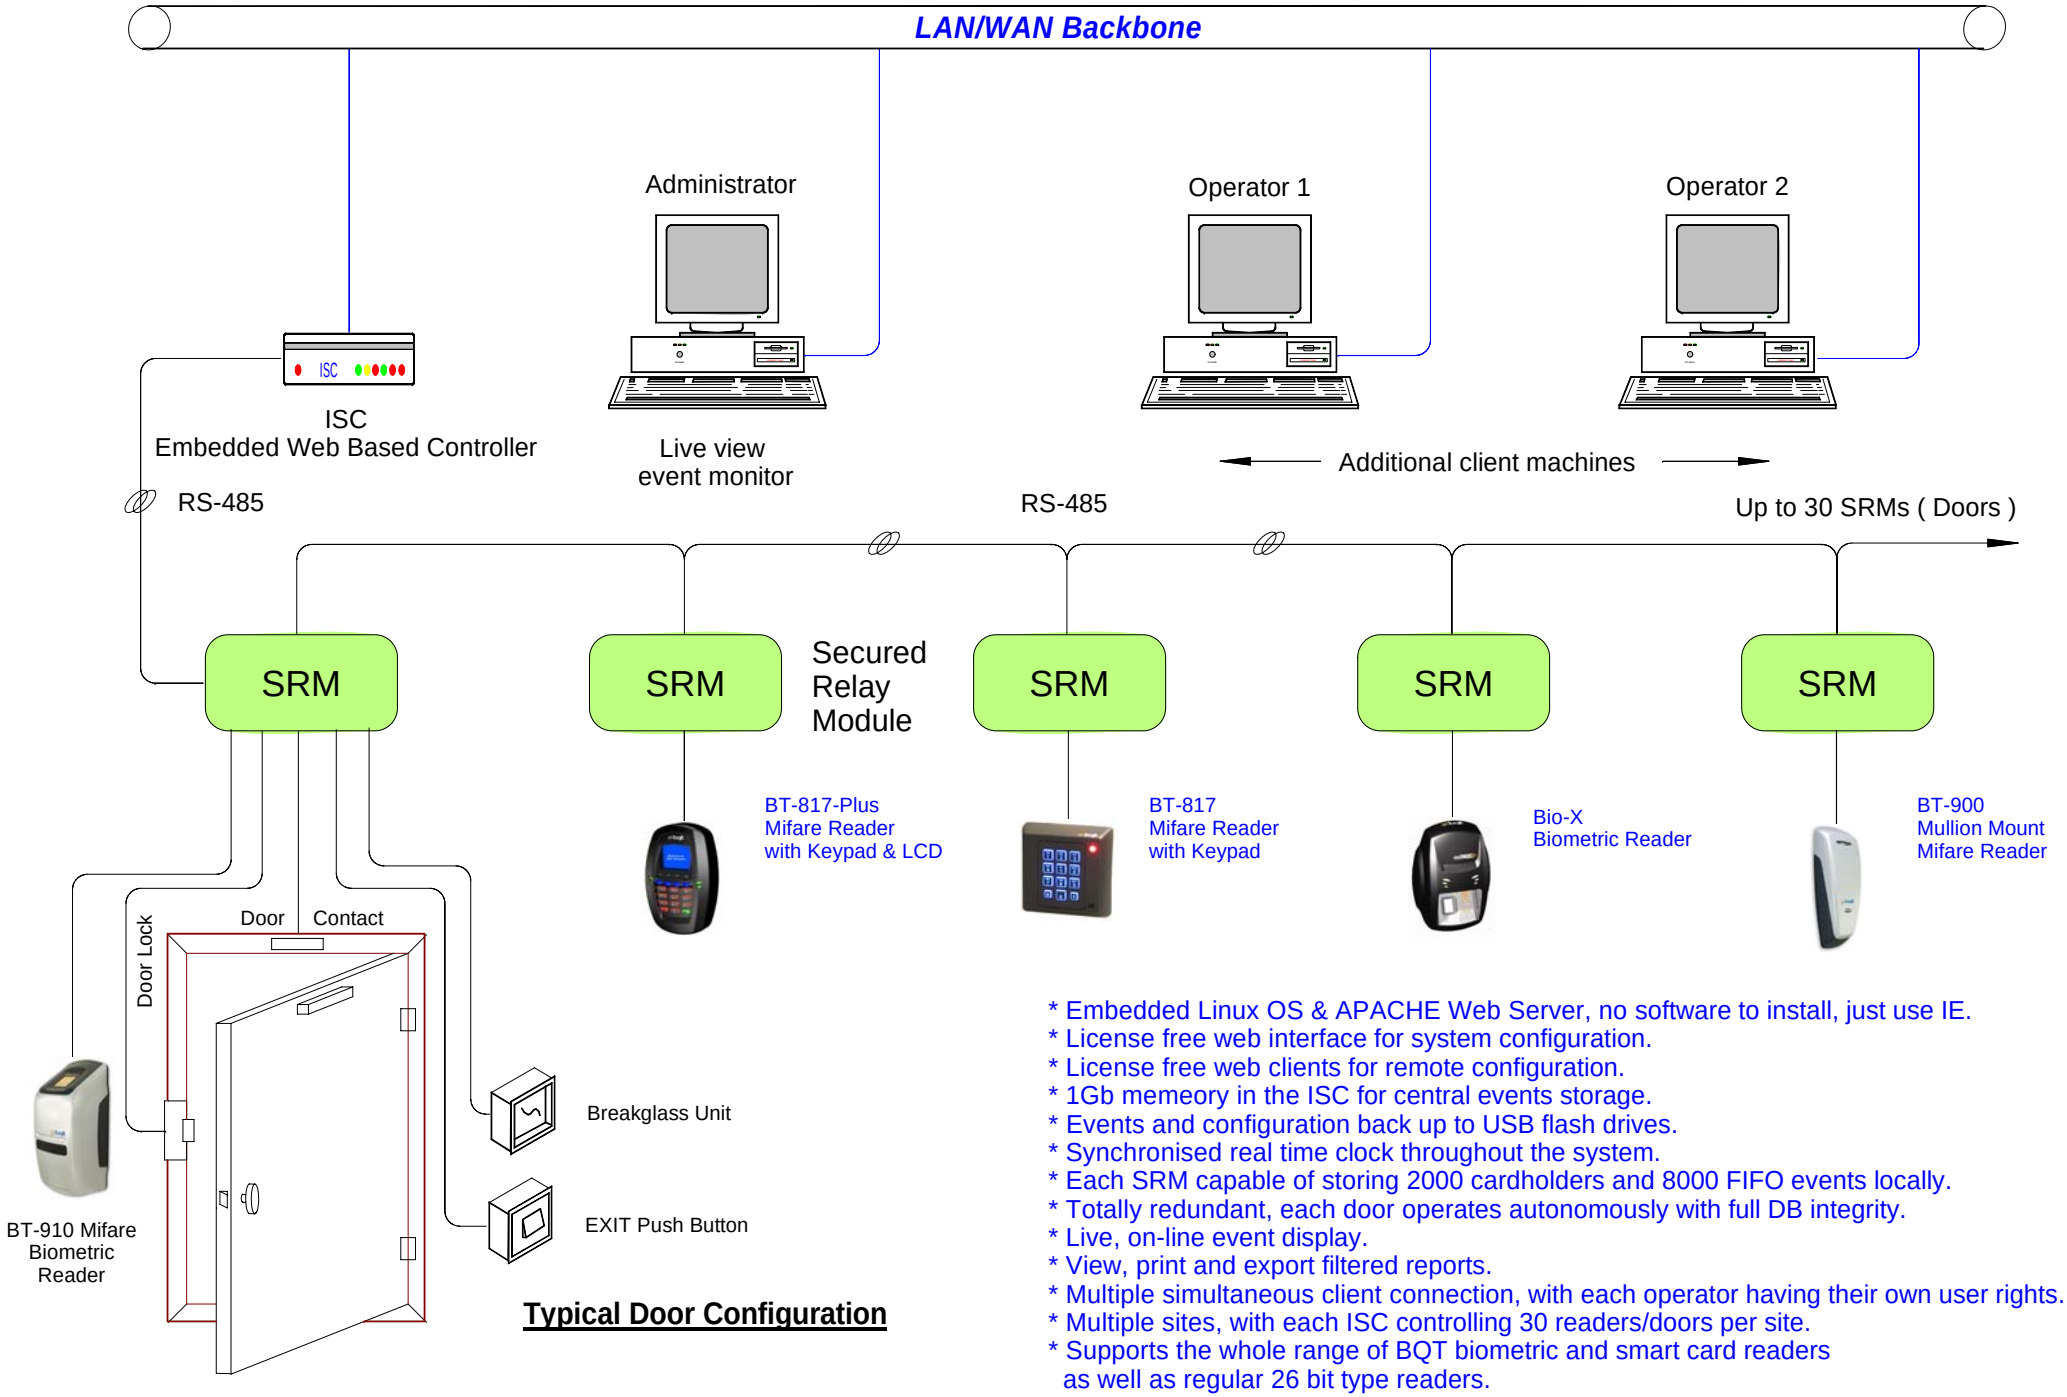

Typical Door Configuration

* Embedded Linux OS & APACHE Web Server, no software to install, just use IE.
* License free web interface for system configuration.
* License free web clients for remote configuration.
* 1Gb memeory in the ISC for central events storage.
* Events and configuration back up to USB flash drives.
* Synchronised real time clock throughout the system.
* Each SRM capable of storing 2000 cardholders and 8000 FIFO events locally.
* Totally redundant, each door operates autonomously with full DB integrity.
* Live, on-line event display.
* View, print and export filtered reports.
* Multiple simultaneous client connection, with each operator having their own user rights.
* Multiple sites, with each ISC controlling 30 readers/doors per site.
* Supports the whole range of BQT biometric and smart card readers as well as regular 26 bit type readers.