


# Power Supplies/ Chargers

- Switch selectable DC voltage output.
- Regulated and filtered output voltage.
- Short circuit protection.
- Thermal protection and compensation.
- Built-in backup battery charger.
- 2 LEDs to indicate AC power input and DC power output status.
- Compatible with lead acid or gel-type rechargeable battery.
- Reverse polarity protected.

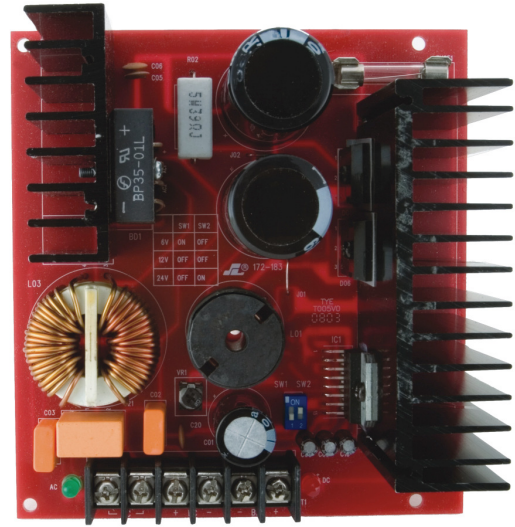

**Power Supplies/Chargers**  
1.5A•2.5A•4.0A•7.0A•9.0A

Model #	DC Voltage	Current (continuous)	Current (peak)	Output current (Maximum Charge)	Size
ST-1206-1.5AQ	6, 12	1.5A	2.0A	6V = 200mA, 12V = 400mA	2 <sup>7</sup> / <sub>8</sub> "x2 <sup>1</sup> / <sub>4</sub> "x1" (73x57x25 mm)
ST-2406-2AQ	6, 12, 24	1.5A	2.0A	6V = 180mA, 12V = 350mA, 24V = 700mA	2 <sup>7</sup> / <sub>8</sub> "x2 <sup>1</sup> / <sub>2</sub> "x1 <sup>3</sup> / <sub>8</sub> " (73x64x35 mm)
ST-2406-3AQ	6, 12, 24	2.5A	3.0A	6V = 180mA, 12V = 350mA, 24V = 700mA	3 <sup>3</sup> / <sub>8</sub> "x2 <sup>7</sup> / <sub>8</sub> "x1 <sup>5</sup> / <sub>16</sub> " (81x73x33 mm)
ST-2406-5AQ	6, 12, 24	4.0A	5.0A	6V = 180mA, 12V = 350mA, 24V = 700mA	3 <sup>3</sup> / <sub>4</sub> "x2 <sup>7</sup> / <sub>8</sub> "x1 <sup>9</sup> / <sub>16</sub> " (95x73x40 mm)
ST-2406-7AQ	6, 12, 24	7.0A	7.5A	6V = 180mA, 12V = 350mA, 24V = 700mA	5 <sup>1</sup> / <sub>2</sub> "x5 <sup>1</sup> / <sub>8</sub> "x2 <sup>1</sup> / <sub>8</sub> " (140x130x55 mm)
ST-2406-10AQ	6, 12, 24	9.0A	10.0A	6V = 180mA, 12V = 350mA, 24V = 700mA	5 <sup>1</sup> / <sub>2</sub> "x5 <sup>1</sup> / <sub>8</sub> "x2" (140x130x51 mm)

