


# VideoJet 10-I Single-channel MPEG-4 Video Encoder or Decoder with ISDN



## Security Systems

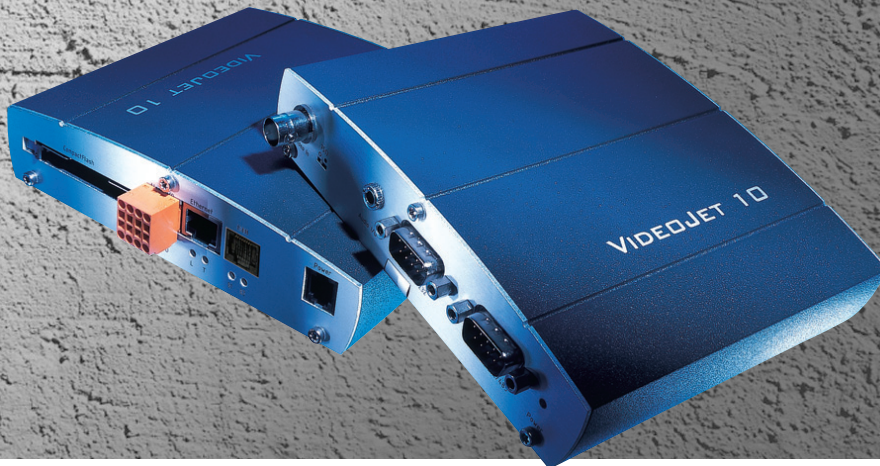

- Single-channel Encoder or Decoder
- MPEG-4 Compression
- Compact Flash card slot
- Wireless 802.11b Card Slot
- Dual streaming, View at One Quality, Recorded at Another
- Two-way Audio
- Alarm Input and Relay Output
- PTZ Control
- Built in Web Server
- Fast Ethernet & ISDN Interface

The VideoJet 10 features high quality MPEG-4 video at up to 30 images per second, and two-way audio over IP- and ISDN networks. Supporting PAL/NTSC sources, it is available in two models either, as an encoder or decoder.

The video signal can be received and displayed with a standard web browser or VIDOS video management software. Using a decoder you can integrate point-to-point connections into your system, to display video from any camera on your analog monitors.


The VideoJet 10-I offers a Compact Flash slot. When used with a memory card, it provides low cost storage to take advantage of Automatic Network Replenishment, providing resilience against network outages. This storage is also highly reliable since there are no moving parts, making it well suited to mobile CCTV applications. Alternately, the slot accommodates an optional wireless card, for optimal flexibility in positioning the encoder and camera. The wireless card follows the popular 802.11b standard.

The VideoJet 10-I supports remote control of popular PTZ cameras, domes, and multiplexers. It includes sophisticated motion detection and pre-alarm recording, to conserve bandwidth and centralized storage. With alarm, relay, and two serial port connections, the unit provides the ideal mechanism to remotely manage events via the network.

### Parts Included

Quantity	Component
1	VideoJet 10 I Encoder or Decoder with international plug-in power supply
1	RS-232 Null modem cable
1	ISDN cable
1	Quick installation Guide
1	CD-ROM with manual


**Installation/Configuration Notes**

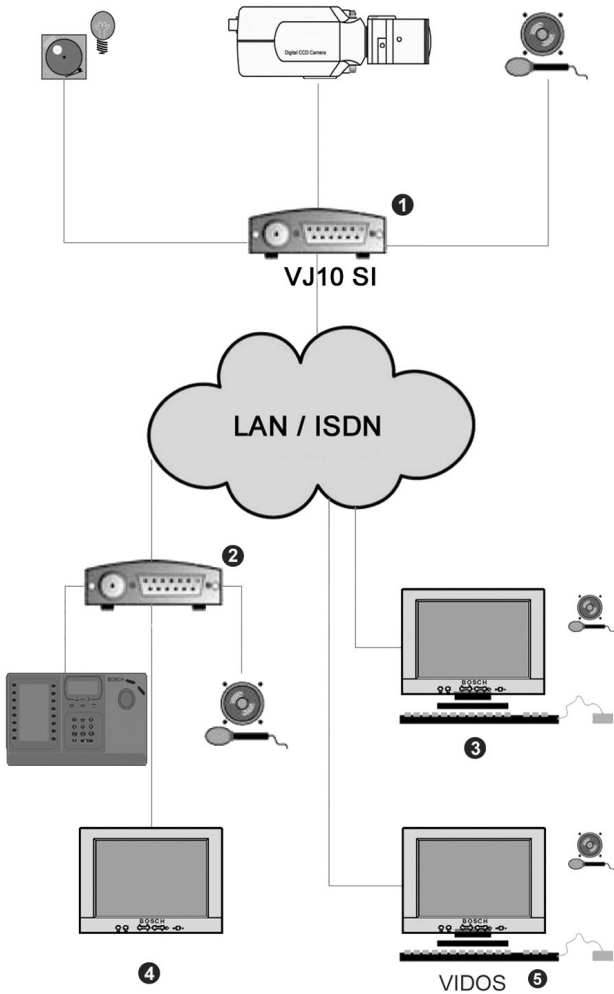


- |                            |                       |
|----------------------------|-----------------------|
| 01 Encoder VideoJet 10 I S | 04 Analog Monitor     |
| 02 Decoder VideoJet 10 E   | 05 VIDEOS Workstation |
| 03 Web Browser             |                       |




- |                                       |                                      |
|---------------------------------------|--------------------------------------|
| 01 COM2: RS232                        | 04 75Ohm Video Termination (encoder) |
| 02 COM1: RS232/422/485                | 05 Audio In/Out                      |
| 03 Video In / Out (encoder / decoder) | 06 LED power                         |

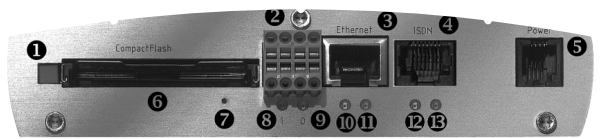

- |                                  |                      |
|----------------------------------|----------------------|
| 01 Ejector for CompactFlash port | 08 LED Alarm in port |
| 02 Alarm in Relay out            | 09 LED Alarm Out     |
| 03 10/100 Base-T FastEthernet    | 10 LED Link          |
| 04 ISDN                          | 11 LED Traffic       |
| 05 Power                         | 12 LED B1            |
| 06 CompactFlash port             | 13 LED B2            |
| 07 Reset: Factory default        |                      |

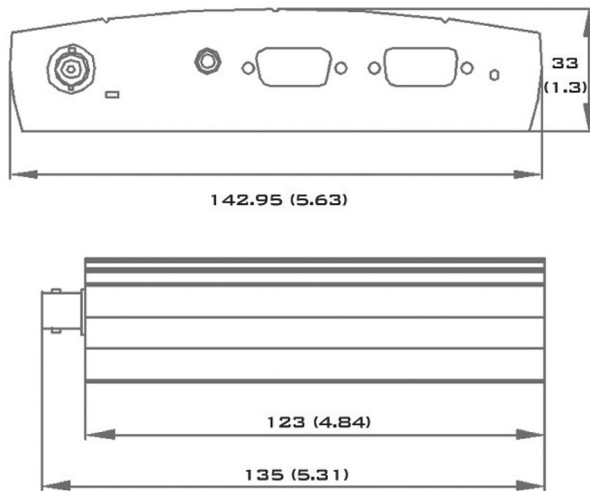

dimensions in mm (inches)

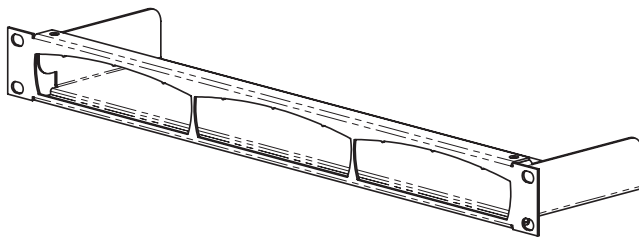

Rack Mount Kit (optional)

**Technical Specifications**

**Electrical**

Video Standards	ISO/IEC 14496 (MPEG-4), M-JPEG
Video Data Rate	9.6 kBit/s - 4 MBit/s
Video Resolution	720 x 576/480* (full D1: 12 fields/s**) 704 x 576* (4CIF:12 fps**) 704 x 288 (2CIF: 20 fps**) 352 x 576/480* (half D1: 25 resp. 30 fields/s**) 352 x 288 (CIF: 25 resp. 30 fps**) 176 x 144 (QCIF: 25 resp. 30 fps**)
Overall Delay (IP)	100 ms
Audio Standards	G.711; 300 Hz - 3.4 kHz
Audio Data Rate	80 kBit/s
Audio Sampl.rate	8 kHz
Network Protocols	RTP, Telnet, UDP, TCP, IP, ARP, HTTP, IGMP, ICMP, SNMP
Software Update	Flash ROM, remote programmable
Configuration	Via Web browser, built-in Web server Interfaces
Video In (Encoder)	1x analog composite: NTSC or PAL; BNC connector 75 Ohm switchable, 0.7-1.2 Vpp
Video Out (Decoder)	1x analog composite: NTSC or PAL; BNC connector 75 ohm, 1 Vpp
Audio In	1 mono line, stereo jack 3.5 mm, 1 Vpp, 50 kOhm
Audio Out	1 mono line, stereo jack 3.5 mm, 1 Vpp, 60 mW, min. 8 Ohm
Alarm In	1x clamp (non-isolated closure contact type), max. activation resistance 10 Ohm
Relay Out	1x clamp, 30 Vpp, 1 A
Analog Sensor In	1x clamp, 0-5 VDC general purpose analog input(e.g. temperature sensor)
COM Ports	1x RS232/422/485, 9-pin Sub-D; 1x RS232, 9-pin Sub-D
Ethernet	10/100 Base-T, auto sensing, half/full duplex, RJ45
ISDN	RJ45, S0-Basic-rate
Wireless	RF-interface 802.11b via CF card interface
Ethernet	
Storage Media	CompactFlash card Type I and II, Microdrive

\*) Supported from firmware version 2.10 onwards

\*\*) Depends on picture content

\*\*\*) 2 Gb – 4Gb Supported in Firmware 2.10

## 4 | VideoJet 10-I Single-channel MPEG-4 Video Encoder or Decoder with ISDN

Environmental	
Input Voltage	12-24 VDC, RJ11
Power	App. 10 VA
Consumption	
Weight	App. 0.4 kg (0.88lbs)
Operating Temperature	0 - 50 °C (32 - 122 °F) ambient temperature
Humidity	20 - 80%, atmospheric humidity (not condensing)
Approvals	CE: IEC 60950; UL 1950; J 60950; AS/NZS 3548; EN 55103-1, -2; EN 55130-4; EN 55022; EN 55024; EN 61000-3-2; EN 61000-3-3; FCC 47 CFR Ch.1 Part 15

Ordering Information	
<b>Model &amp; Description</b>	
VJ10SI 2925	MPEG-4 dual-stream encoder, audio, CF slot, 2 serial interfaces, alarm in and relay out, ISDN
VJ10EI 2955	MPEG-4 decoder, audio, CF slot, 2 serial interfaces, alarm in and relay out, ISDN
<b>Hardware Accessories</b>	
CF WLAN 7907	Compact Flash WLAN-Card 802.11B for VJ10 units
VJ10 WMK 2918/2	Wall mount kit for videojet 10 unit
VJ10 RMK 2918/0 19-inch	19-inch rack mount kit for 3 videojet 10 units

### Americas:

Bosch Security Systems  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone:+1 585 223 4060  
+1 800 289 0096  
security.sales@us.bosch.com  
<http://www.boschsecurity.us>

### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone:+31 (0) 40 27 83955  
Fax:+31 (0) 40 27 86668  
emea.securitysystems@bosch.com  
<http://www.boschsecurity.com>

### Asia-Pacific:

Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone:+65 6319 3450  
Fax:+65 6319 3499  
apr.securitysystems@bosch.com  
<http://www.boschsecurity.com>

# BOSCH