



FLIR ACC™


Network Keyboard

The FLIR Network Keyboard provides a physical interface for controlling FLIR PTZ IP or MPX Cameras, NVRs, and MPX DVRs with an easy-to-use 3 axis joystick. ACCKBD320 connects via RJ45 to a LAN for enhanced control over multiple devices on the network, or utilizes direct RS485 serial connection for PTZ Cameras. The Keyboard can be used to fully operate a FLIR NVR / MPX DVR and manage multiple PTZ Cameras with improved responsiveness and simplicity.

NETWORK KEYBOARD CONTROL

Powerful PTZ and Recorder operation via LAN

- Keyboard with joystick allows precise and rapid control over PTZ camera movement
- LAN connection enables management of multiple devices including FLIR NVRs & MPX DVRs
- Supports RS485, RS232, Pelco-D and Pelco-P

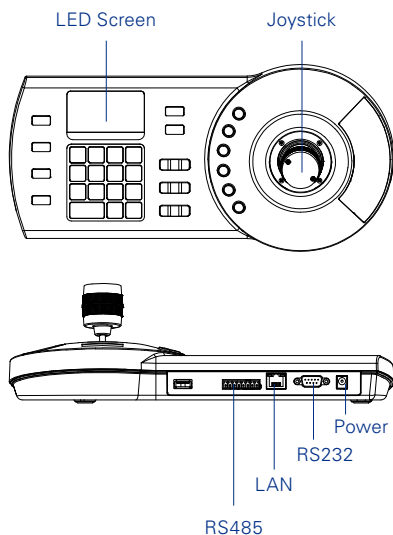

Specifications	
Compatibility	FLIR IP PTZ cameras and NVRs, MPX PTZ cameras and DVRs
Keyboard Keypanel	Electromechanical
Joystick	3-axis, vector-solving, twisting, return to-center
Connectors	RJ45 Ethernet, RS232, RS485
Maximum # of Supported Devices	1024
Keyboard Communication	Direct Mode, Network Mode
PTZ Protocols	MPX CVI, Pelco-D, Pelco-P, Pelco-D1, Pelco-P1
Display	LCD, 75.2mm x 33.85mm
Max User Accounts	1 Admin, 10 User
User Account Type	Admin, User
Power Supply	Input 100V ~240V 50Hz / 60Hz, Output 12V DC 1000mA
Power Consumption	Max 5W
Operating Temperature	-14~131°F / -10~55°C
Operating Humidity	<90%RH
Dimension	13" x 5.1" x 4" / 330mm x 129mm x 102mm
Weight	5.5lbs / 2.5Kg

Ordering Information

ACCKBD320: 8-41430-01033-3

Package Dimensions

16.2 x 8.2 x 6.1" /
412 x 208 x 158mm

MARKHAM, ONTARIO

FLIR Systems, Inc.
250 Royal Crest Court
Markham, ON L3R 3S1
Canada
PH: +1 866.344.4674

PORTLAND

Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
USA
PH: +1 866.477.3687

www.flir.com/security
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2014 FLIR Systems, Inc. All rights reserved. (Created 11/25)