

Product Guide

Network Video Solutions




Welcome to the Axis network video product guide

This guide has been developed to help you navigate our broad range of network video products. If you are looking for comprehensive product specifications, or information about our solutions and customer cases, please visit our website www.axis.com or contact your local Axis office.

The best in network video

Axis is the global market leader in network video. We were first to bring the benefits of network video technology to professional video surveillance and remote monitoring applications, introducing the world's first network camera in 1996. With more than two decades of experience in networking technologies, the largest installed base of network video products, as well as strong partnerships with leading players across all continents, Axis is the partner of choice in network video.



Flexible, scalable solutions

Using open technology standards that enable easy integration and scalability, Axis offers a full range of network video solutions for surveillance and remote monitoring applications in a broad spectrum of industry segments. Our cutting-edge portfolio comprises network cameras that redefine the categories they represent, as well as video servers/encoders that enable cost-effective migration to the best in network video technology. Our offering also includes comprehensive video management software solutions and a full range of accessories.

Network Video

> Network Cameras	4
› Common features and system overview	4
› Fixed cameras, indoor	5
› Fixed cameras, indoor/outdoor	6
› Pan/tilt/zoom cameras, indoor	7
› Pan/tilt/zoom cameras, indoor/outdoor	7
› Technical overview	8-9
> Video Servers/Encoders	10
› Common features and system overview	10
› 1-channel video servers/encoders	11
› 4-channel video servers/encoders	11
› Racks for enterprise installations	12
› Intelligent Video modules	12
› Technical overview	13
> Video Management Software	14
› Viewing, recording and event management	14-15
› Technical overview	16
› Installation and management tools	16
> Recording Solutions	17
> Bundles	17
> Hardware Accessories	18

Technical Corner

19-21

> About	19
› Axis Superior Image Quality	19
› Axis' MPEG-4 support	19
› Internet Version 6 (IPv6) and Quality of Service (QoS)	19
› Power over Ethernet	20
› Megapixel	20
> Preparing your network video project	21
› Main considerations	21
› Free project design tools	21

Product Index

22

Contact information

23

Network Cameras

Watch anything, from anywhere at anytime

Axis network cameras provide an easy way to capture and distribute high quality video over any kind of IP network or the Internet. Images can be viewed using a standard web browser and stored on any hard disk. With built-in web server, Axis network cameras operate stand-alone and can be placed wherever there is an IP network connection.

They enable you to remotely view and record live video from anywhere in the world.

Whether you need an IP-Surveillance solution to secure the safety of people and places, remotely monitor property and facilities, or broadcast events on the web with live images and sound, Axis can meet your needs.



COMMON FEATURES

- Axis Superior Image Quality
- Direct connection to wired or wireless IP networks
- Products with simultaneous MPEG-4 and Motion JPEG
- Independent system with embedded web server - no need for additional hardware or software to capture and transfer images
- Powerful event and alarm management capabilities including multi-window motion detection, pre- and post-alarm image buffering
- Remote configuration and status using Axis management tools or standard web browser
- Comprehensive set of security features such as multi-level password, IP address filtering and HTTPS encryption
- Multiple resolutions and compression levels
- Powerful API (AXIS VAPIX™ API) for software integration
- Products with Internet Protocol version 6 (IPv6) and Quality of Service (QoS)

BENEFITS

- Remote access to live images, any time, anywhere, from any authorized computer
- Digital quality images for perfect viewing
- Many products based on progressive scan, giving less motion blur and clearer images than on interlaced video or DVRs
- Flexibility to place the network camera wherever a network connection is available
- Remote and secure accessibility for efficient, centralized management and reduced maintenance costs
- Scalable and future-proof: the video system can be expanded and grown as far as the network can
- Backed by the industry's largest base of video management software with Axis Application Development Partners
- Ease of integration: easy addition of functionality, system expansion and integration with other systems, such as access control or point of sales

SYSTEM OVERVIEW

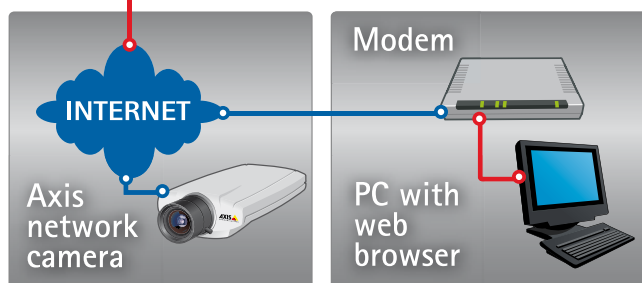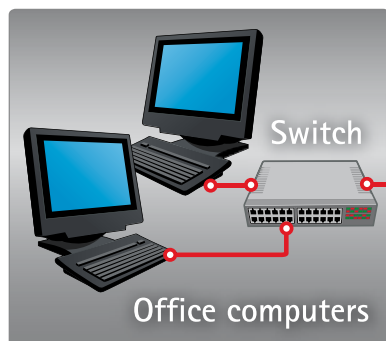

A network camera can be described as a camera and computer combined in one intelligent unit. It captures and transmits live images directly over an IP network (e.g. LAN/intranet/Internet), enabling users to remotely view and/or manage the camera from a web browser on any computer, anywhere, at any time.

An IP-based video surveillance system allows users to monitor remote locations via a local area network (LAN) or the Internet, through a dedicated surveillance application. Camera recordings can be stored on a storage media anywhere on the network.

FIXED CAMERAS INDOOR



AXIS 206

The world's smallest network camera, ideal for remote monitoring.

- ▶ Motion JPEG
- ▶ Up to 30 frames per second in resolutions ranging up to VGA 640x480 pixels
- ▶ Easy installation using the free AXIS Internet Dynamic DNS Service or the Windows-based AXIS IP Utility software
- ▶ Multilingual product interface - including English, French, German, Italian, Spanish, Chinese, Korean and Japanese



AXIS 207

The world's smallest, true bandwidth-efficient MPEG-4 network camera.

- ▶ Simultaneous MPEG-4 and Motion JPEG
- ▶ MPEG-4 implementation with motion estimation for optimized bandwidth efficiency
- ▶ Built-in microphone for synchronized audio
- ▶ Up to 30 frames per second in resolutions ranging up to VGA 640x480 pixels
- ▶ Easy installation using the free AXIS Internet Dynamic DNS Service or the Windows-based AXIS IP Utility software
- ▶ One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors



AXIS 207W Wireless

The world's smallest wireless MPEG-4 network camera, with built-in IEEE 802.11g wireless interface giving you the freedom to place the camera where it's needed.

- ▶ Wireless IEEE802.11g and Ethernet for flexible installation
- ▶ Support for WPA (Wi-Fi Protected Access) and WPA2 protocols for secured wireless transmission
- ▶ All other features the same as the AXIS 207



AXIS 207MW Megapixel Wireless

The world's smallest wireless MPEG-4 network camera with megapixel resolution and built-in IEEE 802.11g wireless connection.

- ▶ Up to 12 frames per second in 1.3 megapixel resolution (megapixel resolution up to 1280x1024)
- ▶ All other features the same as the AXIS 207W

AXIS 209FD-R

Compact and rugged for buses and trains.

- ▶ Flat design for public transportation
- ▶ Progressive scan for sharper images
- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Power over Ethernet (IEEE 802.3af)
- ▶ Vibration, humidity and dust-resistant
- ▶ Camera tampering alarm
- ▶ Remote control of the camera



AXIS 210

Superior video quality for professional indoor applications.

- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Up to 30 frames per second in all resolutions ranging up to 640x480
- ▶ One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors



AXIS 210A

Superior video quality with audio and Power over Ethernet for professional indoor applications.

- ▶ Power over Ethernet (IEEE 802.3af)
- ▶ Built-in or external microphone, and audio output for external speakers
- ▶ All other features the same as the AXIS 210



AXIS 216FD

Professional, discreet fixed dome camera for indoor video and audio surveillance.

- ▶ Discreet and compact design, effectively protecting against tampering
- ▶ Varifocal lens 2.8-10 mm F1.3 with DC-iris
- ▶ Power over Ethernet (IEEE 802.3af)
- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Up to 30 frames per second in VGA 640x480 resolution
- ▶ Two-way audio support including built-in microphone and audio detection alarm
- ▶ One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors



AXIS 216FD-V

Exceptional performance for vandal-resistant, indoor video surveillance.

- ▶ Vandal-resistant and compact design
- ▶ All other features the same as AXIS 216FD-V



FIXED CAMERAS INDOOR/OUTDOOR



AXIS 211*

Professional network camera with superior video quality for indoor and outdoor surveillance and remote monitoring applications.

- Up to 30 frames per second in all resolutions ranging up to 640x480
- Varifocal DC-Iris lens
- Simultaneous Motion JPEG and MPEG-4
- Power over Ethernet (IEEE 802.3af)
- One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors



AXIS 211A*

Professional network camera with superior video quality and two-way audio for indoor and outdoor surveillance and remote monitoring applications.

- Built-in or external microphone, and audio output for external speakers
- Same features as AXIS 211 above



AXIS 221*

High performance network camera for demanding security installations under all lighting conditions.

- Automatic day and night functionality with removable IR filter
- High quality Pentax varifocal DC-iris lens for optimal image quality in outdoor light conditions
- Up to 45 frames per second in all resolutions ranging up to 640x480. Up to 60 frames per second in 480x360 or lower
- Power over Ethernet (IEEE 802.3af)
- Simultaneous Motion JPEG and MPEG-4
- Solid mechanical design with metal casing
- Two alarm inputs and one output for connecting external devices such as door sensors and relays to activate light or close doors

AXIS 223M* Megapixel

Day and night video surveillance with exceptional image detail.

- 2.0 megapixel CCD sensor and lens
- Up to 12 frames per second in 1600x900 resolution
- Simultaneous Motion JPEG and MPEG-4
- Automatic day and night functionality and iris control
- Power over Ethernet (IEEE 802.3af)
- Two-way audio including audio detection alarm



AXIS 225FD

Fixed dome network camera for professional video surveillance in tough conditions.

- Vandal-resistant design and tamper-proof mounting
- Outdoor-proof, IP66 rated design with built-in heater and fan, operating in temperatures down to -20° C (-4° F)
- Varifocal lens 2.8-5.8 mm F1.4 with DC-iris
- Automatic day and night functionality with removable IR filter
- Power over Ethernet (IEEE 802.3af)
- Simultaneous Motion JPEG and MPEG-4
- Up to 30 frames per second in VGA 640x480 resolution
- Two alarm inputs and one output for connecting external devices such as door sensors and relays to activate light and close doors



*Outdoor use of these network cameras requires weatherproof housing

Axis offers convenient and tailor-made solutions for mounting Axis network cameras outdoors and in harsh, humid and dusty environments.

For a full list of available outdoor housings, please contact your local Axis office or visit: www.axis.com/products/cam_housing

PAN/TILT/ZOOM CAMERAS INDOOR/OUTDOOR

INDOOR



AXIS 212 PTZ

Compact PTZ camera offering full overview and instant zoom with retained image resolution – yet with no moving parts.

- › Full overview based on high-quality 3 megapixel sensor and wide angle lens
- › Instant one-click pan, tilt and zoom; 3x instant zoom; 140° pan and 105° tilt; Pan and Tilt speed 400°/1 sec
- › PTZ with no moving parts – no wear and tear
- › Simultaneous Motion JPEG and MPEG-4
- › 30 frames per second in VGA resolution (640x 480 pixels). Whether in overview mode or when zooming in, full VGA resolution is maintained.
- › Power over Ethernet (IEEE 802.3af)
- › Two-way audio including built-in microphone and audio detection alarm
- › One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors

INDOOR/OUTDOOR



AXIS 213 PTZ*

Professional network camera with remote pan/tilt/zoom control.

- › 26x optical zoom lens with auto focus
- › IR mode with built-in IR lighting
- › Provides useful video under all light conditions, indoor as well as outdoors
- › Simultaneous Motion JPEG and MPEG-4
- › Resolutions up to 4CIF at up to 25 fps (PAL) or 30 fps (NTSC)
- › Optional AXIS 213CM Connection Module for two way audio + alarm inputs and outputs



AXIS 214 PTZ*

Professional day and night camera with remote pan/tilt/zoom and audio.

- › 18x optical zoom lens with auto focus
- › Automatic day and night functionality with removable IR filter
- › Integrated two-way audio support
- › Simultaneous Motion JPEG and MPEG-4
- › Resolutions up to 4CIF at up to 25 fps (PAL) or 30 fps (NTSC)
- › One alarm input and one output for connecting external devices such as door sensors and relays to activate light or close doors



AXIS 231D+*

Network dome camera with remote pan, tilt and zoom control for demanding surveillance applications.

- › 18x optical zoom lens with auto focus and 12x digital zoom
- › Remote pan/tilt/zoom control from any PC locally on the LAN or over the Internet
- › Simultaneous Motion JPEG and MPEG-4
- › Resolutions up to 4CIF at up to 25 fps (PAL) or 30 fps (NTSC)
- › Operates down to 0.3 lux @ F1.4
- › Four alarm inputs and four outputs for connecting external devices such as door sensors and relays to activate light and close doors



AXIS 232D+*

Day and night network dome camera designed for demanding security installations under all light conditions.

- › Automatic day and night functionality with removable IR filter
- › Operates down to 0.3 Lux in color and 0.005 Lux in IR-mode
- › Same features as AXIS 231D+ above












AXIS 233D*

High-speed dome camera with progressive scan and 35x zoom.

- › 35x optical zoom with auto focus and 12x digital zoom
- › Electronic Image Stabilizer
- › Wide Dynamic Range
- › Automatic day and night functionality with removable IR-filter
- › Area zoom for quick and simple pan/tilt/zoom
- › Simultaneous Motion JPEG and MPEG-4
- › Resolutions up to 4CIF at up to 25fps (PAL) or 30 fps (NTSC)
- › Pan and tilt speed 0.05 – 450°/second
- › E-flip that electronically turns the image 180° when following an object under the dome
- › On-screen Direction Indicator
- › Two way audio
- › Four alarm inputs and four outputs for connecting external devices such as door sensors and relays to activate lights or close doors



Axis Network




Fixed Network Cameras: indoor								Fixed Network	
	AXIS 206 Network Camera	AXIS 207/ AXIS 207W Network Camera	AXIS 207MW Network Camera	AXIS 209FD-R Network Camera	AXIS 210 Network Camera	AXIS 210A Network Camera	AXIS 216FD/ AXIS 216FD-V Network Camera	AXIS 211 ³ Network Camera	AXIS 211A ³ Network Camera
Product Portfolio Network Cameras									
Image sensor	1/4" Micron progressive scan CMOS	1/4" Micron progressive scan RGB ¹ CMOS	1/3" Micron progressive scan RGB CMOS 1.3 Megapixel	1/4" Micron progressive scan RGB VGA CMOS	1/4" Sony Wfine progressive scan RGB CCD	1/4" Sony Wfine progressive scan RGB CCD	1/4" Micron progressive scan RGB CMOS	1/4" Sony Wfine progressive scan RGB CCD	1/4" Sony Wfine progressive scan RGB CCD
Day and Night functionality									
Lens	4.0 mm/F2.0 fixed iris	4.0 mm/F2.0 fixed iris	3.6 mm/F1.8 fixed iris	3.0 mm/F2.0 fixed iris	4.0 mm/F1.2 fixed iris CS mount	4.0 mm/F1.2 fixed iris CS mount	Varifocal 2.8 - 10 mm/F1.3 DC-iris	Varifocal 3.0 - 8.0 mm/F1.0 DC-iris, CS mount	Varifocal 3.0 - 8.0 mm/F1.0 DC-iris, CS mount
Min illumination/ light sensitivity (lux)	4 - 10,000	1 - 10,000	2 - 10,000	1.5 - 10,000	1 - 10,000	1 - 10,000	1	0.75	0.75
Video compression	Motion JPEG	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4
Max video resolution (pixels)	640 x 480	640 x 480	1280 x 1024	640 x 480	640 x 480	640 x 480	640 x 480	640 x 480	640 x 480
Frames per second	Up to 30, for all resolutions	Up to 30, for all resolutions	Up to 14 in resolu- tions up to 1280x720, up to 12 in 1280x1024	Up to 30, for all resolutions	Up to 30, for all resolutions	Up to 30, for all resolutions	Up to 30, for all resolutions	Up to 30, for all resolutions	Up to 30, for all resolutions
Audio support		One-way	One-way			Two-way	Two-way		Two-way
Alarm inputs/outputs		1/1	1/1		1/1	1/1	1/1	1/1	1/1
Video Motion Detection		✓	✓	✓	✓	✓	✓	✓	✓
Security	Multi-level password	Multi-level password IP address filtering ¹ HTTPS encryption ¹	Multi-level password IP address filtering HTTPS encryption	Multi-level password IP address filtering HTTPS encryption	Multi-level password IP address filtering	Multi-level password IP address filtering HTTPS encryption IEEE 802.1X	Multi-level password IP address filtering HTTPS encryption	Multi-level password IP address filtering	Multi-level password IP address filtering HTTPS encryption IEEE 802.1X
Lens changeable					✓	✓		✓	✓
Power over Ethernet (IEEE 802.3af)	Yes, with splitter	Yes, with splitter ²		Built-in	Yes, with splitter	Built-in	Built-in	Built-in	Built-in
Serial connectors									
Other	AXIS Camera Station One included	AXIS Camera Station One included	AXIS Camera Station One included	Tamper-resistant casing			Tamper-resistant ⁵ Vandal-resistant ⁶ casing		

1) AXIS 207W only 2) AXIS 207 only 3) Outdoor use requires weather-proof housing 4) Camera can be used with C/CS lens 5) AXIS 216FD 6) AXIS 216FD-V







OVERVIEW

Network Cameras

Network Cameras: indoor/outdoor

AXIS 221 ³ Network Camera	AXIS 223M ³ Network Camera	AXIS 225FD Network Camera
		
1/3" Sony Wfine progressive scan RGB CCD	1/2.7" Sony Wfine progressive scan RGB CCD 2 Megapixel	1/4" Sony Wfine progressive scan RGB CCD
Automatic	Automatic	Automatic
Varifocal 3.0 – 8.0 mm/F1.0 DC-iris, CS mount	Varifocal 4.0 – 8.0 mm/F1.4 DC-iris, C-mount ⁴	Varifocal 2.8 – 5.8 mm/F1.4 DC-iris
0.65 (color) 0.08 (B/W)	1.5 (color) 0.2 (B/W)	1 (color) 0.2 (B/W)
Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4
640 x 480	1600x900 (16:9) 1600x1200 (4:3)	640 x 480
Up to 45, for all resolutions	12 (16:9) 9 (4:3)	Up to 30, for all resolutions
	Two-way	
2/1	2/1	2/1
✓	✓	✓
Multi-level password IP address filtering HTTPS encryption	Multi-level password IP address filtering IEEE 802.1X	Multi-level password IP address filtering HTTPS encryption
✓	✓	
Built-in	Built-in	Built-in
RS-232, RS-485/422	RS-232, RS-485/422	RS-485/422
		Vandal-resistant, IP66-rated casing Heater and fan

Pan/Tilt/Zoom Network Cameras

	AXIS 212 PTZ Network Camera	AXIS 213 PTZ Network Camera ⁷	AXIS 214 PTZ Network Camera ⁷	AXIS 231D + Network Dome Camera	AXIS 232D+ Network Dome Camera	AXIS 233D Network Dome Camera
Product Portfolio Network Cameras						
Image sensor	1/2" progressive scan CMOS 3 Megapixel	1/4" interlaced CCD	1/4" Sony ExView HAD interlaced CCD	1/4" Sony ExView HAD interlaced CCD	1/4" Sony ExView HAD interlaced CCD	1/4" ExView HAD progressive scan CCD
Day and Night functionality		Configurable Built-in IR lamp	Automatic		Automatic	Automatic
Lens	2.7 mm/F1.8 fixed iris 3x instant zoom	3.5 – 91 mm auto iris and auto focus 26x optical zoom 12x digital zoom	4.1 – 73.8 mm auto iris and auto focus 18x optical zoom 12x digital zoom	4.1 – 73.8 mm auto iris and auto focus 18x optical zoom 12x digital zoom	4.1 – 73.8 mm auto iris and auto focus 18x optical zoom 12x digital zoom	3.4 – 119 mm auto iris and auto focus 35x optical zoom 12x digital zoom
Min illumination/ light sensitivity (lux)	10 lux wide mode 20 lux tele mode	1 (color) 0.1 (B/W)	0.3 (color) 0.005 (B/W)	0.3	0.3 (color) 0.005 (B/W)	0.5 (color) 0.008 (B/W)
Video compression	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4
Max video resolution (pixels)	640 x 480	4CIF	4CIF	4CIF	4CIF	4CIF
Frames per second (NTSC/PAL)	Up to 30 for all resolutions	Up to 30/25 for all resolutions	Up to 30/25 for all resolutions	Up to 30/25 for all resolutions	Up to 30/25 for all resolutions	30/25 for all resolutions
Pan/Tilt/Zoom – Pan range – Tilt range	20 presets 140° 105° Guard tour	20 presets 340° 100°	20 presets 340° 120°	20 presets 360° endless 90° Guard tour	20 presets 360° endless 90° Guard tour	100 presets 360° endless 180° Guard tour
Audio support	Two-way	Two-way ⁸	Two-way			Two-way
Alarm inputs/outputs	1/1	2/3 ⁸	1/1	4/4	4/4	4/4
Video Motion Detection	✓	✓	✓	✓	✓	✓
Security	Multi-level password IP address filtering HTTPS encryption	Multi-level password, IP address filtering	Multi-level password IP address filtering HTTPS encryption	Multi-level password IP address filtering HTTPS encryption IEEE 802.1X	Multi-level password IP address filtering HTTPS encryption IEEE 802.1X	Multi-level password IP address filtering HTTPS encryption IEEE 802.1X
Analog video output		✓ ⁸				
Serial connectors		RS-232 ⁸		RS-232	RS-232	
Other	Designed for continuous motion 24/7	Built-in IR light up to 3 m		Designed for continuous motion 24/7	Designed for continuous motion 24/7	Designed for continuous motion 24/7

Video Servers/Encoders

Helping you migrate your analog security system into an IP-based video solution

Axis video servers integrate easily into your existing analog CCTV system. A video server (also referred to as video encoder) digitizes analog video signals and distributes digital images directly over an IP-based network (e.g. LAN/intranet/Internet), turning analog cameras into network cameras.

Users can view live images from a web browser on any networked computer, anywhere and at any time. With Axis video servers, you get all the benefits that digital technology offers while protecting your existing analog investment.

COMMON FEATURES

- Analog video sources converted to high-quality digital video
- De-interlace filter corrects motion blur caused by the analog video signal
- Products with simultaneous MPEG-4 and Motion JPEG
- Direct connection to IP networks
- Independent system with embedded web server – no need for additional hardware or software to capture and transfer images
- Powerful event and alarm management capabilities including multi-window video motion detection, pre- and post-alarm image buffering
- Remote configuration and status with Axis management tools or standard web browser
- Comprehensive set of security features, including multi-level password, IP address filtering and HTTPS encryption
- Powerful API (AXIS VAPIX™ API), for software integration

BENEFITS

- Remote access to live images, any time, anywhere, from any computer
- Digital quality images for perfect viewing
- Scalable and future-proof
- Lower total cost of ownership by leveraging existing network infrastructure and legacy equipment
- Convenient digital video storage
- Increased functionalities compared to CCTV system
- Remote and secure accessibility for efficient, centralized management and reduced maintenance costs
- Ease of integration: easy addition of functionality, system expansion and integration with other systems, such as access control or point of sales
- Backed by the industry's largest base of video management software with Axis Application Development Partners

SYSTEM OVERVIEW



A video server/encoder accommodates one or more analog video channels, image digitizer, image compressor and web server with network interface. Video servers digitize analog video sources and distribute digital images over an IP network, turning an analog camera into a network camera. It is ideal for migrating an existing analog system to a network video solution.

By combining an analog CCTV system with a network video system, you acquire all the functionality and benefits that digital technology offers: remote accessibility, cost-effectiveness, flexibility, scalability, integration and future-proof functionality, and superior image quality.

1 and 4 CHANNEL VIDEO SERVERS/ENCODERS



AXIS 241S 1 channel

The AXIS 241S has one analog video input and one video loop-through port for an analog monitor, in addition to an Ethernet connection, and I/O connections.

- ▶ Up to 30/25 frames per second up to 4CIF resolution



AXIS 241Q 4 channels

The AXIS 241Q connects up to four analog cameras and transmit digital video from all four channels simultaneously via an Ethernet connection.

- ▶ Up to 30/25 frames per second up to 4CIF resolution



AXIS 241QA 4 channels

The AXIS 241QA connects up to four analog cameras and features two-way audio support.

- ▶ Up to 30/25 frames per second up to 4CIF resolution
- ▶ Integrated two-way audio support



AXIS 243SA 1 channel

The AXIS 243SA is a one-channel video server providing full frame rate video in MPEG-4 and Motion JPEG.

- ▶ Full frame rate (30/25fps) in MPEG-4 and Motion JPEG in all resolutions
- ▶ High quality, de-interlaced video
- ▶ Integrated two-way audio support
- ▶ Supports Internet Protocol version 6 (IPv6)

AXIS 240Q 4 channels

The AXIS 240Q connects up to four analog cameras and transmits digital video from all four channels simultaneously via an Ethernet connection, at a maximum frame rate of 6/5 frames per second on each channel.

- ▶ High quality Motion JPEG video at 6 (NTSC) or 5 (PAL) frames per second per channel
- ▶ Multiple resolutions and compression levels
- ▶ 4 alarm inputs and 4 outputs
- ▶ 3 MB pre/post alarm memory per channel
- ▶ Support for PTZ devices, uploadable PTZ drivers
- ▶ Up to 20 simultaneous viewers



AXIS 243Q Blade 4 channels

AXIS 243Q Blade is a 4-channel video server providing full frame rate in full 4-CIF resolution and, together with AXIS 291 1U Video Server Rack, forming a high-density video encoder rack solution for up to 12 channels.

- ▶ Full 25/30 frames per second at all resolutions for all channels simultaneously
- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Video motion detection and 9MB pre-/post-alarm buffer per channel
- ▶ Support for PTZ and dome cameras
- ▶ Up to 20 simultaneous users (unlimited with MPEG-4 multicast)



AXIS 242S IV 1 channel

Intelligent one-channel video server offering unique possibilities for executing advanced embedded applications such as people counting, trip wire detection and other Intelligent Video solutions.

- ▶ Intelligent video and audio analyses inside
- ▶ Dedicated Digital Signal Processor for advanced video and audio analysis
- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Up to 30/25 frames per second in resolutions up to 704x576 (PAL) / 704x480 (NTSC)
- ▶ 9 MB pre-/post-alarm buffering for securing critical images
- ▶ Support for PTZ and dome cameras
- ▶ Available with preloaded applications: AXIS IVM120 – People counter
- ▶ More applications available from Axis Application Development Partners (ADP)



AXIS 247S 1 channel

An ultra-compact one-channel video server solution, ideal for installation close to the analog camera, where constraints call for an optimized solution.

- ▶ Full 25/30 frames per second at 4CIF resolution
- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ Power over Ethernet with power out for camera
- ▶ Integrated one way audio support including detection alarm



COMMON FEATURES AXIS 243SA/241S/Q/QA

- ▶ Simultaneous Motion JPEG and MPEG-4
- ▶ 5 different resolutions up to 704x576 (PAL) and 704x480 (NTSC), and 11 different compression levels
- ▶ Built-in video motion detection
- ▶ 4 freely configurable alarm inputs and 4 outputs
- ▶ 9 MB pre/post alarm memory per channel
- ▶ Support for third-party pan/tilt/zoom devices, using uploadable PTZ drivers
- ▶ Up to 20 simultaneous viewers (unlimited with MPEG-4 multicast)
- ▶ Auto sensing for PAL and NTSC

FOR ENTERPRISE INSTALLATIONS

Designed for improved serviceability and quick replacement of units, AXIS 291 1U Video Server Rack and AXIS Video Server Rack hold from 1-3 or 1-12 video server blades respectively, which are interchangeable and hot-swappable so there is no need to power down when installing or changing blades. The racks come with integrated power supply for easy installation and expansion. Axis video server racks combine high reliability

and functionality with flexible and professional installation, and provide higher density of video channels compared with stand-alone solutions. Axis video server racks are specially designed for applications involving a large number of cameras, both existing and new, as well as applications that cover large physical surveillance areas such as prisons, airports, large buildings, university campuses, subways and railway stations.



AXIS 291 1U Video Server Rack

AXIS 291 1U Video Server Rack is a high-density solution for quick and professional installation of up to 3 video servers in the same rack. It is designed to migrate 4, 8 or 12 analog cameras into high performance, IP-based, digital solutions using only one Ethernet port. Together with the AXIS 243Q Blade Video Server, it forms a video server solution that offers full frame rate in full 4CIF resolution for up to 12 channels.

- › 1 Unit high rack solution
- › 3 slots for Axis video server blades; "hot swap" support
- › Serial communication and I/O connectors at the rear of each slot, and a single network connection together with integrated power for simple installation
- › Any combination of 240Q, 241Q, 241S and 243Q Blade Video Servers



AXIS Video Server Rack

The AXIS Video Server Rack enables large surveillance installations to quickly install as many as 12 video server blades in the same rack. It is designed to migrate from 4 to 48 analog cameras into high performance, IP-based, digital solutions.

- › 3 Unit high rack solution
- › 12 slots for Axis video server blades; "hot swap" support
- › Network, serial communication and I/O connectors at the rear of each slot, and common power supply
- › Any combination of 240Q, 241Q, and 241S Blade Video Servers

INTELLIGENT VIDEO MODULES











AXIS IVM120 People Counter

Effective monitoring of customer traffic.

The AXIS IVM120 People Counter is a tamper-proof software application developed for the AXIS 242S IV Video Server, intended for retail stores and other indoor environments where you need to count people. Easy to set up, it enables shop owners to instantly monitor customers per hour, day or week over the network. Collect data such as number of passages, make trend analyses and use for evaluation of advertising and promotions. All the analyses are done on-site, inside the video server, making the scalability infinite.

- › Accurate customer/visitor counting online
- › Counting your customers per hour, day or week
- › Easy to set up
- › The module can be pre-installed in the AXIS 242S IV, or easily added afterwards – "one-click installation"
- › Integrates easily with your network
- › Effective strategic decision support
- › Support for AXIS VAPIX API for easy integration into other applications

Axis Video Servers/Encoders

1-Channel Video Servers/Encoders					4-Channel Video Servers/Encoders			
	AXIS 247S Video Server ¹⁾	AXIS 241S Video Server	AXIS 242S IV Video Server	AXIS 243SA Video Server	AXIS 240Q Video Server	AXIS 241Q Video Server	AXIS 241QA Video Server	AXIS 243Q Blade Video Server
								
Video compression	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG	Motion JPEG MPEG-4	Motion JPEG MPEG-4	Motion JPEG MPEG-4
Max video resolution (pixels)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)	704x480 (NTSC) 704x576 (PAL)
Frames per second MPEG-4 (NTSC/PAL)	27/23 (4CIF) 30/25 (VGA, CIF)	21/17 (4CIF) 30/25 (CIF)	21/17 (4CIF) 30/25 (CIF)	30/25 (4CIF) 30/25 (CIF)	-	10/9 (2CIF) 20/17 (CIF) per channel	10/9 (2CIF) 20/17 (CIF) per channel	30/25 (4CIF) 30/25 (CIF) per channel
Frames per second Motion JPEG (NTSC/PAL)	30/25 (4CIF) 30/25 (VGA, CIF)	30/25 (4CIF) 30/25 (CIF)	30/25 (4CIF) 30/25 (CIF)	30/25 (4CIF) 30/25 (CIF)	6/5 (4CIF) 6/5 (CIF) per channel	27/22 (2CIF) 30/25 (CIF) per channel	27/22 (2CIF) 30/25 (CIF) per channel	30/25 (4CIF) 30/25 (CIF) per channel
Video source	1 BNC composite	1 BNC composite or Y/C video input ²⁾	1 BNC composite or Y/C video input	1 BNC composite or Y/C video input ²⁾	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs	4 BNC composite inputs
Audio support	One-way		For analysis only	Two-way			Two-way	
Alarm inputs/outputs	1/1	4/4	4/4	4/4	4/4	4/4	4/4	4/4
Motion detection	✓	✓	✓	✓	✓	✓	✓	✓
Pan/Tilt/Zoom support		✓	✓	✓	✓	✓	✓	✓
Security	Multi-level password IP address filtering HTTPS IEEE802.1X	Multi-level password IP address filtering HTTPS IEEE802.1X	Multi-level password IP address filtering HTTPS	Multi-level password IP address filtering HTTPS IEEE802.1X	Multi-level password IP address filtering HTTPS IEEE802.1X	Multi-level password IP address filtering HTTPS IEEE802.1X	Multi-level password IP address filtering HTTPS	Multi-level password IP address filtering HTTPS IEEE802.1X
Serial connectors		RS-232, RS-485/422	RS-232, RS-485/422	RS-232, RS-485/422	RS-232, RS-485/422	RS-232, RS-485/422	RS-232, RS-485/422	RS-485/422
Standalone version	✓	✓	✓	✓	✓	✓	✓	
Blade for 3U rack		✓			✓	✓		
Blade for 1U rack		✓			✓	✓		✓

Rack solutions

Axis video server rack solutions are designed for high-density installations accommodating multiple video server blades in the same rack.

AXIS 291 1U Video Server Rack



AXIS 291 1U Video Server Rack is a 19" rack that can use any combination of up to 3 interchangeable and hot-swappable Axis blade video servers, migrating 1 - 12 analog cameras to network video via a single Ethernet port.
Supports AXIS 240Q, AXIS 241Q, AXIS 241S and AXIS 243Q Blades.

AXIS Video Server Rack



The AXIS Video Server Rack is a 19" 3U rack for up to 12 interchangeable and hot-swappable Axis blade video servers, migrating up to 48 analog cameras.
Supports AXIS 240Q, AXIS 241Q and AXIS 241S Blades.

¹⁾ Supports PoE (IEEE 802.3af) incl. power out to the camera ²⁾ Y/C video requires converter cable

Video Management Software

Remote viewing, recording and event management

Axis provides video management software that complements the company's network cameras and video servers.

Axis Application Development Partners (ADP) offer an additional wide range of complete video solutions.

APPLICATION DEVELOPMENT PARTNERS



Axis Application Development Partners (ADP), which comprise more than 400 companies, offer a wide range of complete software solutions that meet varying specifications and requirements for different application areas - from entry-level software to comprehensive applications covering most industry segments. More information about Axis Application Development Partners is available at www.axis.com/partner/adp_intro.htm

VIEWING, RECORDING and EVENT MANAGEMENT

AXIS Camera Station

AXIS Camera Station provides video monitoring, recording and event management functions. Users can record video continuously, on schedule, on alarm and/or on motion detection. The software has multiple search functions for recorded events. Remote viewing and playback are also possible with the use of a web browser or the AXIS Camera Station Windows client.

- View and record live video from multiple cameras simultaneously
- Multiple recording modes: continuous, scheduled, on alarm and/or motion detection
- High quality recordings in MPEG-4 and Motion JPEG
- Optional* AXIS Image Enhancer component for improving image clarity in poor visibility conditions such as fog, smoke, rain and snow
- No recording limitation in software
- Multiple search functions for recorded events
- Audit log
- Remote access via web browser or Windows client
- Control of PTZ and dome cameras using mouse or joystick
- Alarm alert functions (beep and e-mail)
- Full duplex, real-time audio support
- Multilingual support for English, French, German, Italian and Spanish

AXIS Camera Station User interface

AXIS Camera Station runs as a Windows service in the background on a dedicated PC. Remote viewing and playback are possible with the use of a web browser or with the AXIS Camera Station's Windows client.

Red frame around image when recording

Live view



View selection
4,6,9,10,13 or
16 split view

I/O control

View recordings

Event log

FREE OF CHARGE!




AXIS Camera Station One

AXIS Camera Station One is a free one-camera version of AXIS Camera Station, designed for single camera viewing and recording. The software is available from the Axis website and is upgradable to a 4-or 10-base license of AXIS Camera Station.

*Add-on functionality that is integrated into AXIS Camera Station (version 1.20 and higher) and activated with a separate license key. License keys can be purchased in packages of 1 and 5 from your nearest reseller. One AXIS Image Enhancer license is required per video channel.

Scenario 1

AXIS Camera Station and Axis network cameras are located on the same local network. A typical environment for this type of installation is a small office or retail shop. Viewing, playback and administration are done directly in AXIS Camera Station.

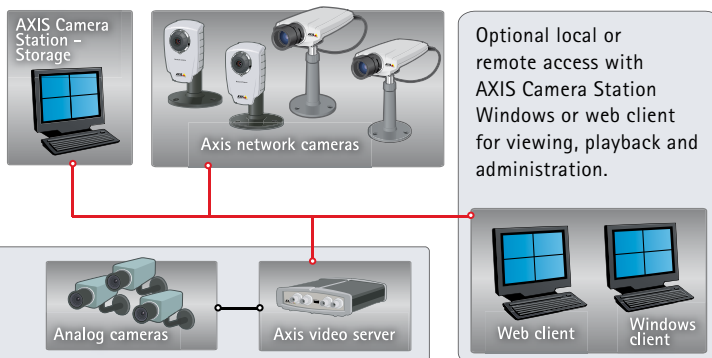

The same functionality is achieved with your existing CCTV system, with analog cameras connected to an Axis video server.

Scenario 2

Typical scenarios are schools or retail stores with different locations but one common surveillance system, which can be remotely accessed from anywhere on the Internet by a supervisor or a contracted security company.



AXIS Image Enhancer

Add-on software component for AXIS Camera Station that improves image quality in poor visibility conditions

AXIS Image Enhancer is an add-on software component for AXIS Camera Station that improves image quality in fog, smoke, rain and snow. Video is shown without distorting elements, which makes this the ideal solution for any situation where video quality can be affected by bad weather and crucial information can be lost.

- ▶ Improves image quality in fog, smoke, rain and snow; extends visibility in harbors, airports, roads and tunnels
- ▶ Superior results compared with brightness/contrast adjustments; optimal image enhancement is achieved with video taken between dawn and dusk
- ▶ Ideal for outdoor cameras
- ▶ For use with live or recorded color only video (supports all Axis network cameras and video servers)
- ▶ Add-on functionality that is integrated into AXIS Camera Station (version 1.20 and higher) and activated with a separate license key
- ▶ License keys can be purchased in packages of 1 and 5. One AXIS Image Enhancer license is required per video channel



Select a live or recorded video stream from AXIS Camera Station and improve the quality with AXIS Image Enhancer.

SEE FOR YOURSELF: Try AXIS Image Enhancer with AXIS Camera Station now!
FREE 30-DAY TRIAL: www.axis.com/camstation/aie

Free 30-day demo version of AXIS Camera Station (available in English, French, German, Italian and Spanish), including free 30-day demo version of AXIS Image Enhancer.

TECHNICAL OVERVIEW

	AXIS Camera Station	AXIS Camera Station One
Application	Recording and security surveillance/remote monitoring	
Live viewing	Up to 25 (16 in same view)	1
Provides motion detection (whether camera has built-in video motion detection or not)	✓	✓
Supports built-in video motion detection in Axis network video products (saves use of bandwidth)	✓	✓
Archiving	✓	
Recording length	No limit	
Recording modes	Continuous, scheduled, motion detection, alarm triggers	
Remote viewing, playback and administration via Windows client	✓	
User-controlled access per camera	✓	
Audio support	Full duplex audio	
Alarm alert functions (beep and e-mail)	✓	✓
Interactive PTZ control	✓	✓
Advanced search function	✓	
Audit log	✓	
Works on PC/workstation	✓	✓
Language support	English, French, German, Spanish, Italian	

INSTALLATION and MANAGEMENT TOOLS




AXIS Installation Monitor

Easy adjustment of focus, viewing angle and direction.

AXIS Installation Monitor software simplifies the physical installation and service of Axis network cameras mounted on walls, ceilings, poles, etc. Basic camera properties can be monitored by using a handheld Pocket PC, and without having to rely on a laptop or contact with a colleague at a remote computer. The installer can easily view the live image from the camera while adjusting the focus, viewing angle and direction, and even the field of view for pan/tilt cameras.

- › Automatically detects Axis video products
- › Simple adjustment of focus with easy-to-read indicator
- › Pan and tilt control
- › Views and controls I/Os
- › Supports wired, wireless and PoE installations
- › Makes adjustments conveniently by using a Pocket PC

www.axis.com/products/cam_im_software

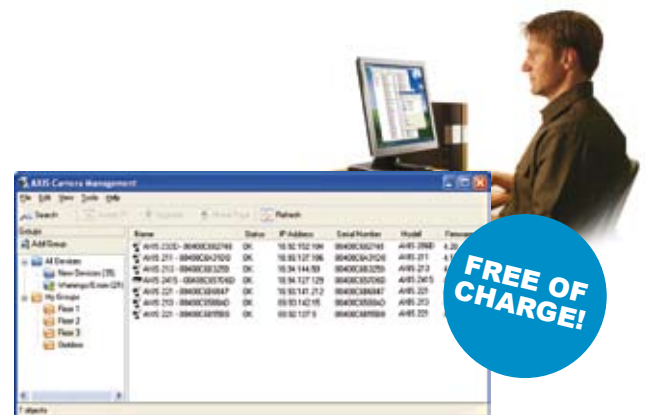

AXIS Camera Management

Efficient management tool for your Axis network video products.

AXIS Camera Management is a powerful and efficient installation and management tool for Axis network video products. The tool uses standard Internet protocols and runs on a standard Windows PC.

- › Locates and shows status of Axis video devices on the network
- › Assigns IP addresses, manually or automatically from a specified range
- › Firmware upgrades of multiple units, in sequence or in parallel

www.axis.com/products/cam_mgmt_software

RECORDING SOLUTIONS

**AXIS 262+ Network Video Recorder**

Complete network video recording solution*.

- ▶ Records from up to eight cameras
- ▶ Recording up to megapixel resolution
- ▶ Simultaneous recording, live viewing and playback of recorded images
- ▶ 250 GB hard disk with Anti-Vibration
- ▶ Records up to 120 frames per second at 4CIF or VGA
- ▶ Remote access to recorded material as well as to live cameras
- ▶ Remote control for PTZ cameras

**Product not available for sale in North America*

Bundles

Complete solutions and special offers

Axis offers a number of product bundles; for instance, a network camera with outdoor housing and solutions including several network cameras with video management software. These

solutions let you get started quickly with your video application. For a full list of available bundles and special offers, please visit www.axis.com or contact your local Axis office.

AXIS 262+/207 Surveillance Kit

This bundle consists of four AXIS 207 Network Cameras and one AXIS 262+ Network Video Recorder.*

**AXIS 262+/210 Surveillance Kit**

This bundle consists of four AXIS 210 Network Cameras and one AXIS 262+ Network Video Recorder.*

**AXIS 210 Surveillance Kit**

This bundle consists of four AXIS 210 Network Cameras and one AXIS Camera Station software with licenses for four network cameras/video servers.

**AXIS 206 Surveillance Kit**

This bundle consists of four AXIS 206 Network Cameras and one AXIS Camera Station software with licenses for four network cameras/video servers.

**AXIS 210A Surveillance Kit**

This bundle consists of four AXIS 210A Network Cameras and one AXIS Camera Station software with licenses for four network cameras/video servers.

**AXIS 207 Surveillance Kit**

This bundle consists of four AXIS 207 Network Cameras and one AXIS Camera Station software with licenses for four network cameras/video servers.



Hardware accessories

A full range of accessories for all your video communication needs

Axis provides a wide range of complementary video and network accessories and devices for your network cameras and video servers.



AXIS 292 Network Video Decoder

Decodes digital video and audio streams for analog systems.

- › Allows regular TV sets, analog monitors and existing analog video switches to be connected to an Axis IP-based video system
- › For use with all Axis Motion JPEG and MPEG-4 based products



Power over Ethernet

Network video without the need for power outlets.

- › With the use of Power over Ethernet products, Axis network video products can communicate data and receive power over a single Ethernet cable



IR illuminators

Infrared light for indoor/outdoor surveillance in low light or complete darkness.

- › Semi-covert or completely covert models available
- › Use with AXIS 213 PTZ, AXIS 214 PTZ, AXIS 232D+, AXIS 221 and AXIS 225FD

A full list of available accessories can be found on Axis' website at www.axis.com/products/video/accessories.

AXIS 295 Video Surveillance Joystick

Easy joystick control of Axis PTZ and dome cameras.

- › Easy to install and configure using USB interface
- › Durable high quality joystick
- › X/Y-axis for positioning and turning handle for zoom
- › 12 programmable push-buttons



Lenses and lens accessories

- › Lens 4mm CS mount
- › Lens CS varifocal 3.5-8mm DC-IRIS



Mounting accessories

- › Stand cam metal
- › Stand cam plastic



Connectors and cables

- › Cable serial null modem
- › Terminal Conn. 4P 3.81mm
- › Terminal Conn. 8P 3.81mm

Power accessories

- › Mains adapters and extension cables

Protective housings

For mounting Axis network cameras outdoors and in harsh, humid and dusty indoor environments.

- › Various housings available, including vandal-resistant housings



Technical Corner

Designing a system

AXIS SUPERIOR IMAGE QUALITY

Image quality is one of the most important features of any camera, if not the most important. This is particularly so in surveillance and monitoring applications, where lives and property may be at stake.

Determining factors

Unlike traditional analog cameras, Axis network cameras are equipped with processing power not only to capture and present the images, but also to digitally manage and compress the video for network transport. There is a natural trade-off between levels of compression and image quality. But even so, image quality can vary considerably, depending on choice of optics and image sensor, available processing power and level of sophistication of the algorithms. To summarize, one should specifically look at the aspects of

- › Type of image sensor
- › Low light capabilities of the camera
- › Ability to replace the lens
- › Resolution

- › Supported compression standards
- › Image capture technology

Why is Axis image quality superior?

Since the development of network cameras first began, Axis introduced a stream of image enhancing technologies and patents. From a technical point of view, Axis' Superior Image Quality rests on three pillars:

- › Advanced signal processing, image enhancement algorithms and video compression technologies
- › Custom-designed image processing and video networking chips
- › Careful selection and matching of the latest image sensors and lenses



AXIS' MPEG-4 SUPPORT

Many Axis video products feature advanced real-time video encoding that can deliver simultaneous MPEG-4 and Motion JPEG streams. This gives users the flexibility to maximize image quality for recording and reduce bandwidth needs for live viewing.

Axis MPEG-4 follows the ISO/IEC 14496-2 standard and provides Advanced Simple Profile (ASP) at level 5. With a

wide range settings, it is possible to configure the streams to be optimized for both bandwidth and quality. The Axis Media Control (AMC) with MPEG-4 decoder included, makes viewing of streams and integration into applications easy.

Furthermore, Axis' multicasting support enables an unlimited number of viewers without sacrificing network system performance.

INTERNET PROTOCOL VERSION 6 (IPv6) and QUALITY OF SERVICE (QoS)

As more and more devices are added to networks and to the Internet, IP addresses (the address that individually identifies each unit) are becoming a scarce resource. To handle this, a successor to the current IP protocol version 4, has been adopted: Internet Protocol version 6 (IPv6). The main improvement brought by IPv6 is the increase in the number of addresses available for networked devices. Other important improvements are in areas such as routing and network auto-configuration. Products that support IPv6 will be well prepared for the future, as IPv6 becomes more widely used.

As different networks, such as telephone, data and video (CCTV) all continue to merge into a single IP network, it becomes more and more important to control the sharing of

network resources, to fulfill the requirements of each service. One solution is to have network equipment treat different types of services (voice, data, video) differently as the traffic passes through the network. By using Quality Of Service (QoS), network applications can co-exist on the same network, without consuming each other's bandwidth. The main benefits of a QoS-aware network can be summarized as:

- › The ability to prioritize traffic and thus allow critical flows to be served before flows with lesser priority
- › Greater reliability in the network, thanks to the control of the amount of bandwidth an application may use, and thus control over bandwidth races between applications.

POWER OVER ETHERNET (PoE)


One cable for transmitting video, audio* and power. With a network video solution, you have the option of using the same Ethernet cable both for data communications and power. This feature makes it easier to install products since an electrician is not required and the network video product is able to operate even when there is a power failure if the PoE source is connected to a UPS.

PoE technology is regulated in a standard called IEEE 802.3af and is designed in a way that does not degrade the network data

communication performance or decrease the network reach. The power delivered over the LAN infrastructure is automatically activated when a compatible terminal is identified, and blocked to legacy devices that are not compatible. This feature allows users to freely and safely mix legacy and PoE-compatible devices on their network.

** depending on camera model*

Power over Ethernet

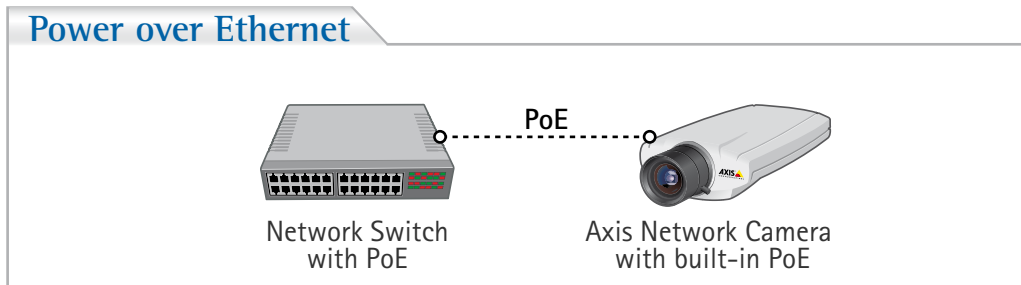

MEGAPIXEL

The higher the resolution, the more details can be seen in an image. This facilitates the identification of objects and persons – important considerations in video surveillance. Megapixel resolution allows the same scene to be viewed in greater detail, or a larger scene to be viewed at a maintained resolution. The higher resolution also means that digital pan/tilt/zoom can be used without causing a drop in resolution.

After the video signal from an NTSC or PAL analog camera has been digitized, the maximum resolution will be 0.4 megapixel. New network camera technology makes higher resolutions possible. One common megapixel format is 1280x1024, which gives 1.3 megapixel resolution, 3 times higher than analog cameras. Cameras that provide up to 3 megapixel are also

available. It is, however, important to bear in mind that higher resolutions generally lead to reduced light sensitivity, because of the smaller pixels in the image sensor as compared to conventional cameras.

The full 1600x1200 resolution provided by AXIS 223M Network Camera gives more than 4 times the number of pixels compared to a high-resolution analog camera.



PREPARING YOUR NETWORK VIDEO PROJECT

MAIN CONSIDERATIONS

1. Define the scene and type of network video products required

Scene: What kind of scene do you want to monitor? How important is it?	This will help you determine the features you would like to have in a network camera, such as video quality, light sensitivity and type of lens.
Lighting conditions: level of indoor and/or outdoor light sensitivity required	Axis offers network cameras for indoor use, as well as models for both indoor/outdoor conditions. Indoor/outdoor cameras have varifocal lens that automatically adjust the lens' iris. Day/night cameras, which provide color images during daytime and black & white images during night time are also available. Check details on the network camera's light sensitivity both in indoor and/or outdoor environments. Lighting conditions are measured in "lux".
Distance from position of camera to object being monitored	This determines the type of camera and type of lens (normal, telephoto, wide-angle) to use, as well as the placement of the camera(s). Choose Axis network cameras with fixed focal or varifocal lenses, with or without replaceable lenses, according to the level of flexibility needed.
Angle of view needed: wide, narrow, general or detailed coverage (Determine how much of the scene you need to see)	Network cameras come with fixed angle and focus, as well as variable ones that allow remote pan/tilt/zoom capability, which enables a wider area of coverage.
High or low traffic	The higher the traffic, the more cameras may be needed.

2. Determine your application needs: features, recording and storage needs

Application: Simple remote viewing, intelligent surveillance system with advanced event management, input/output triggers, audio?
Viewing and recording needs: Determine when and how often you need to view and record: day, night and/or weekends? Schedule the needs for every scene.
Calculate storage requirements
Calculate bandwidth requirements


3. Determine your network needs (LAN/WAN, wireless)

Assess network use of current LAN: what are you or the company using it for?
Assess network use of current WAN links
Determine the pattern of congestion levels over a given period
Do you need to add new equipment to the network, e.g. switches, or use existing infrastructure and equipment?
Do you need to subscribe to additional ISPs for redundancy?
Is distributed storage needed?

FREE PROJECT DESIGN TOOLS

A variety of tools that will help you design your network video project

Technical Guide to Network Video

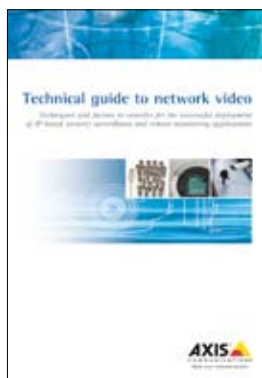

Before setting up your own network video system, you need to consider what features the system can provide. It is equally important to consider factors such as performance, interoperability, scalability, flexibility and future-proof functionality. This reference guide explores the techniques and factors to consider for the successful deployment of IP-based security surveillance and remote monitoring applications. It will help you achieve a solution that takes full advantage of the potential of network video technology.

Multilingual: English, German, French, Italian, Spanish and Dutch!

To order your free personal copy, visit
www.axis.com/free_guide

Axis Network Video Design Tools DVD



This DVD guides you through the factors and settings to consider for the successful deployment of a network video installation. It includes the AXIS Design Tool, a simulation-based calculation tool which helps determine the bandwidth and storage needs for specific network video projects. Multilingual: English, German, French, Italian, Spanish, Dutch, Japanese and Korean!

To order your free personal copy, visit
www.axis.com/free_dvd

PRODUCT INDEX

> Network Cameras

› AXIS 206	5
› AXIS 207	5
› AXIS 207W Wireless	5
› AXIS 207MW Megapixel Wireless	5
› AXIS 209FD-R	5
› AXIS 210	5
› AXIS 210A	5
› AXIS 211	6
› AXIS 211A	6
› AXIS 212 PTZ	7
› AXIS 213 PTZ	7
› AXIS 214 PTZ	7
› AXIS 216FD	5
› AXIS 216FD-V	5
› AXIS 221	6
› AXIS 223M	6
› AXIS 225FD	6
› AXIS 231D+	7
› AXIS 232D+	7
› AXIS 233D	7

> Video Servers/Encoders

› AXIS 240Q	11
› AXIS 241Q	11
› AXIS 241QA	11
› AXIS 242S IV	11
› AXIS 243Q Blade	11
› AXIS 243SA	11
› AXIS 247S	11
› AXIS 291 1U	12
› AXIS IVM120	12
› AXIS Rack Solution	12

> Video Management Software

› AXIS Camera Management	16
› AXIS Camera Station	14
› AXIS Image Enhancer	15
› AXIS Installation Monitor	16

> Recording Solutions

› AXIS 262+	17
-------------	----

> Bundles

› AXIS 206 Surveillance Kit	17
› AXIS 207 Surveillance Kit	17
› AXIS 210 Surveillance Kit	17
› AXIS 210A Surveillance Kit	17
› AXIS 262+/207 Surveillance Kit	17
› AXIS 262+/210 Surveillance Kit	17

> Hardware Accessories

› AXIS 292	18
› AXIS 295 Joystick	18
› Connectors and cables	18
› IR illuminators	18
› Lens and lens accessories	18
› Mounting accessories	18
› Power accessories	18
› Power over Ethernet	18
› Protective housings	18

CONTACT INFORMATION

www.axis.com/request

CORPORATE HEADQUARTERS, SWEDEN

Lund
Axis Communications AB
Emdalavägen 14
SE-223 69 Lund
Sweden
Tel: +46 46 272 18 00
Fax: +46 46 13 61 30

AUSTRALIA

Melbourne
Axis Communications Pty Ltd
Level 27, 101 Collins Street
Melbourne VIC 3000
Australia
Tel: +613 9221 6133

CANADA

Toronto
Axis Communications Canada
117 Lakeshore Road E,
Suite 304
Mississauga, ON L5G 4T6
Canada
Tel: +1 978 614 2000

CHINA

Shanghai
Shanghai Axis Communication
Equipment Trading Co., Ltd.
Room 6001, Novel Building
887 Huai Hai Zhong Rd.
Shanghai 200020
China
Tel: +86 21 6431 1690
Fax: +86 21 6433 8264

FRANCE, BELGIUM, LUXEMBURG

Paris
Axis Communications S.A.
7-9 avenue Aristide Briand
94230 Cachan
France
Tel: +33 1 49 69 15 50
Fax: +33 1 49 69 15 59
Support: +33 1 49 69 15 50
E-mail: support-fr@axis.com

GERMANY, AUSTRIA, SWITZERLAND

Munich
Axis Communications GmbH
Lilienthalstr. 25
DE-85399 Hallbergmoos
Germany
Tel: +49 811 555 08 0
Fax: +49 811 555 08 69
Support: +49 1805 294 77 8

ITALY

Torino
Axis Communications
Via Roma 47
10025 Pino Torinese
Torino
Italy
Tel/Fax: +39 011 841 321

JAPAN

Tokyo
Axis Communications K.K.
Shinagawa East One Tower 13F
2-16-1 Konan
Minato-ku Tokyo 108-0075
Japan
Tel: +81 3 6716 7850
Fax: +81 3 6716 7851

KOREA

Seoul
Axis Communications Korea
Co., Ltd.
Rm 407, Life Combi B/D.
61-4 Yoido-dong
Yeongdeungpo-Ku
Seoul
South Korea
Tel: +82 2 780 9636
Fax: +82 2 6280 9636

THE NETHERLANDS

Rotterdam
Axis Communications BV
Glashaven 38
NL-3011 XJ Rotterdam
Netherlands
Tel: +31 10 444 34 34
Fax: +31 10 750 46 99
Support: +31 10 444 34 31

SINGAPORE

Singapore
Axis Communications
(S) Pte Ltd.
7 Temasek Boulevard
#11-01A Suntec Tower 1
Singapore 038987
Tel: +65 6 836 2777
Fax: +65 6 334 1218

SPAIN

Madrid
Axernet Communications S.A.
Sector Oficinas 31, 1
ES-28760 Tres Cantos
Spain
Tel: +34 91 803 46 43
Fax: +34 91 803 54 52
Support: +34 91 803 46 43

SOUTH AFRICA

Johannesburg
Axis Communications SA
Pty Ltd.
Hampton Park, Ilford House
20 Georgian Crescent
Bryanston, JHB, South Africa
Tel: +27 11 548 6780

PO Box 70939
Bryanston 2021, South Africa

TAIWAN

Taipei
Axis Communications Ltd
8F-11, 101 Fushing North Road
Taipei
Taiwan
Tel: +886 2 2546 9668
Fax: +886 2 2546 1911

UNITED ARAB EMIRATES

Dubai
Axis Communications
Middle East
PO Box 293637, DAFZA
Dubai, UAE
Tel: +971 4 214 9777

UNITED KINGDOM

Hertfordshire
Axis Communications (UK) Ltd.
Suite 2, Ladygrove Court
Hitchwood Lane
Preston, Nr Hitchin
Hertfordshire SG4 7SA, UK
Tel: +44 870 162 0047
Fax: +44 870 777 8620
Support: +44 870 162 0048

UNITED STATES

Boston
Axis Communications Inc.
100 Apollo Drive
Chelmsford, MA 01824
USA
Tel: +1 978 614 2000
Fax: +1 978 614 2100
Support: +1 800 444 2947

San Diego
Axis Communications Inc.
9191 Towne Centre Drive
Suite #420
San Diego, CA 92122
USA
Tel: +1 978 614 2000
Support: +1 800 444 2947

About Axis

Axis is an IT company offering network video solutions for professional installations. The company is the global market leader in network video, driving the ongoing shift from analog to digital video surveillance. Axis products and solutions focus on security surveillance and remote monitoring, and are based on innovative, open technology platforms.

Axis is a Swedish-based company, operating worldwide with offices in 18 countries and cooperating with partners in more than 70 countries. Founded in 1984, Axis is listed on the Nordic List, Mid Cap and Information Technology exchanges. For more information about Axis, please visit our website at www.axis.com

www.axis.com