ASTCD102VP Cameras

1/3" Vandal Resistant Fixed Dome Camera





### **FEATURES**

- 1/3" Sony Super HAD CCD 470.000 pixels
- 540 TVL Horizontal Resolution
- 3 Way Axis Gimbal, wall mountable
- Day & Night Function
- Digital Noise Reduction
- On- screen- menus (Multi-Language)
- Privacy Zones
- Varifocal Lens: f = 2.9 10 mm, auto iris
- Weatherproof Outdoor Installation (IP66)
- Power Input AC24V/DC12V

#### **SUMMARY**

This colour camera is capable of superb observation, thanks to its state-of-the-art implementation of 1/3" CCD 470,000 pixels. It is easy to install due to it's antivandal camera enclosure.

Through the use of SONY CCD and the outstanding digital signal process, this camera provides extremely sharp image quality. By using backlight compensation function, it is able to give brighter and sharper images of an object darkened by background lighting or sunlight. Particularly, it applies the highly sensitive Super HAD CCD, which allows optimum observation of parking lots or building interiors that are dimly lit at best. Through the perfect Auto/Manual white balance function, the camera ensures accurate representation of colours under any environment. The IP66 class vandal restistant camera can be applied directly in outdoor environment.



Design and specifications are subject to change without notice

Status 04/2008

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com


ASTCD102VP Cameras

1/3" Vandal Resistant Fixed Dome Camera

SPECIFICATIONS	
Image Sensor	1/3" CCD (Sony Super HAD)
Scanning System	PAL, 50Hz, 2:1 Inter Line Transfer
Pixels - total	795 x 596
Pixels - Effective	752 x 582
Resolution	540 (H) lines
Sensitivity	0.3 lux
S/N Ratio	48 dB
BLC	On/Off
AGC	On
White Balance	ATW, AWC
Lens Focal Length	2.9 ~ 10 mm
Lens Drive Type	DC auto iris
Shutter Speed	1/50 sec to 1/100,000 sec
Number of Privacy	4 ea
Zones	
Sens Up	Off, auto
OSD	Yes
Motion Detection	On/Off/Area Setting
IP Class	66
Video Output(s)	1 CVBS, 1Vpp, BNC & 1 test monitor out
Operating Temperature	-10°C ~ +50°C
Supply Voltage	12 VDC / 24 VAC
Power Consumption	3 W
Weight	0.75 kg
Dimensions w*h*d	Ø 145 x 100 mm

# New

## **DIMENSIONS**

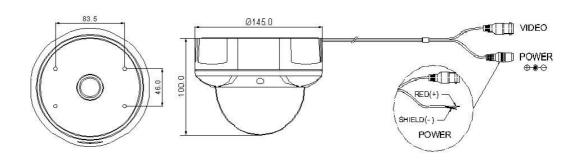



Design and specifications are subject to change without notice

Status 04/2008

# **AASSET SECURITY SA**

153, rue Michel Carré F-95100 Argenteuil Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com