IR LED Illuminator



# **FEATURES**

- Compact chassis
- Invisible with 950nm wavelength
- MTBF > 100,000 hours

SP	EC	IFI	CA	TIC	ONS

Optical Wavelength	940 nm
Max. IR Distance	30 m
Beam Angle	30°
IP Class	66
MTBF at 25° C	> 100,000 hours
Supply Voltage	12 VDC +6%, -6%
Power Consumption	12 W
Weight	1 kg
Dimensions w*h*d	105 x 90 mm




Design and specifications are subject to change without notice

Status 04/2008

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com

IR LED Illuminator

### **DIMENSIONS**

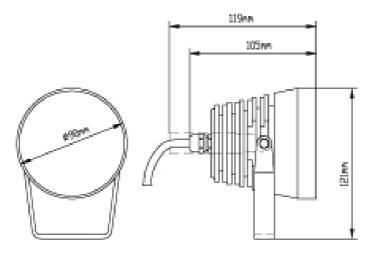

## **ACCESSORIES**



## ASTST1

IR LED Illuminator wall bracket



# ASTST2

IR LED Illuminator wall bracket



#### ASTST3

IR LED Illuminator wall bracket



Design and specifications are subject to change without notice

Status 04/2008

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74

info@aasset-security.com www.aasset-security.com