IR LED Illuminator





FEATURES

Compact chassisMTBF > 100,000 hours

SPECIFICATIONS

Optical Wavelength	880 nm
Max. IR Distance	30 m
Beam Angle	90°
Protection Rating	IP66
MTBF at 25° C	> 100,000 hours
Supply Voltage	12 VDC / 220 VAC
Including	Bracket & PSU included
Power Consumption	15 W
Weight	1 kg
Dimensions w*h*d	219 x 134 x 134 mm




Design and specifications are subject to change without notice

Status 02/2009

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com


IR LED Illuminator

DIMENSIONS





Angles of view

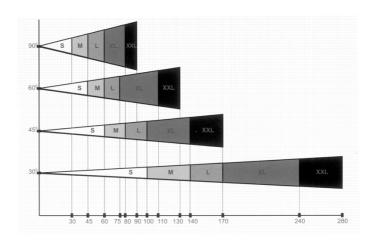



Design and specifications are subject to change without notice

Status 02/2009

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com

IR LED Illuminator

ACCESSORIES



AST ST3 IR LED Illuminator wall bracket





Design and specifications are subject to change without notice

Status 02/2009

Tel: +33(0)1 30 76 30 30 Fax: +33(0)1 30 76 25 74 info@aasset-security.com www.aasset-security.com