

Continuum[®] BACnet Family[™]



- **Powerful, Flexible System Controller for the Most Demanding Applications**
- **Native BACnet/IP Communications for Interoperability to Third-Party Systems**
- **10/100 Ethernet Port**
- **Expandable I/O Meets Additional Point Count Needs**
- **Non-Volatile Flash Memory Provides Utmost Reliability — Stores Both Application Program and Operating System**
- **Flash Memory Allows Easy On-Line Software Updates**
- **Optional Local Display/Keypad Provides Easy Operator Interface**
- **Local, Extended Storage of Log Data**
- **View and Modify Information with Optional *Smart Sensor* Display**

b4920 System Controller/BACnet Router

The *Continuum* b4920 is a unique, powerful system controller that also functions as a native BACnet router for an RS-485 sub-network of up to 127 BACnet MS/TP devices, such as the *Continuum* b3850 VAV controller, or third-party MS/TP devices. The b4920 is a native BACnet Advanced Application Controller (B-AAC) that communicates directly on an Ethernet IP network as a BACnet Master device.

Designed for control of larger Air Handling Units, chillers, boilers, and other mechanical plant equipment, the b4920 features plenty of dynamic memory for application programs as well as for expanded local data logging of critical data. The b4920 also features a fast 32-bit processor, universal inputs, override switches on all outputs, two-piece connectors, and an optional 4-line display with keypad. The b4920 also has an additional room sensor input, which supports Andover's *Smart Sensor*, or any standard room temperature sensor.

As a native BACnet controller, the b4920 series can communicate with all other BACnet devices on the Ethernet network, and attached MS/TP sub-networks, in strict accordance with **ANSI/ASHRAE standard 135-2001**. The b4920 can share and gather data from the wider Ethernet/IP network of controllers. Among those Ethernet controllers can be *Continuum* controllers (BACnet or Infinet) or third-party BACnet/IP devices. All Andover devices, both BACnet and Infinet, are fully compatible with the *Continuum* CyberStation front-end software, a fully native BACnet workstation application.

INCREASED RELIABILITY WITH FLASH MEMORY

The b4920's non-volatile Flash memory stores your operating system and application programs, so that in the event of a power loss, your application will be restored when power is returned. In addition, the Flash memory allows for easy upgrades of your operating system via software downloads, eliminating the need to swap out proms. The b4920 controllers include an on-board battery to safeguard your runtime data — protecting all point data and log data from being lost if power is removed.

Andover Controls
WE'RE BUILDING SMART



INPUTS

The input configuration on the b4920 series consists of sixteen full range, 12-bit Universal inputs that accept voltage (0-10VDC), digital (on/off), counter signals (up to 4Hz), temperature signals, or supervised alarm circuits for security applications. The b4920 offers an additional input to support the Andover *Smart Sensor*, or any standard room temperature sensor.

OUTPUTS

The b4920 contains 16 outputs - eight Form C relay outputs, each rated for 24 VAC/VDC, 3 amp, and eight analog outputs (0-10V, 4-20mA). Both the relay and analog outputs have manual override switches, with software feedback of the switch position.

I/O EXPANSION



The b4920 contains an I/O expansion port for the addition of up to two Andover xP expansion modules directly on the bottom of the controller. The xP family of modules includes the DI-8, D0-2, D0-4, AO-2, and AO-4. In addition, the I/O bus supports the xP Local Display Module, which allows the user to view and change point values. The Local Display Module is also available factory-mounted directly onto the b4920.

SOFTWARE CAPABILITIES


The dynamic memory of the b4920 can be allocated for any combination of programs, scheduling, alarming, and data logging using the powerful Andover Controls *Plain English*® programming language. Our object-oriented *Plain English* language with intuitive keywords provides an easy method to tailor the controller to meet your exact requirements. Programs are entered into the b4920 using the *Continuum CyberStation*®. Programs are then stored and executed by the b4920 controllers.

Programming multiple b4920 controllers is inherently easy with *Plain English*. A complete copy of one b4920's programs can be loaded directly into other b4920s without changing any point names or programs.


(continued on back page)

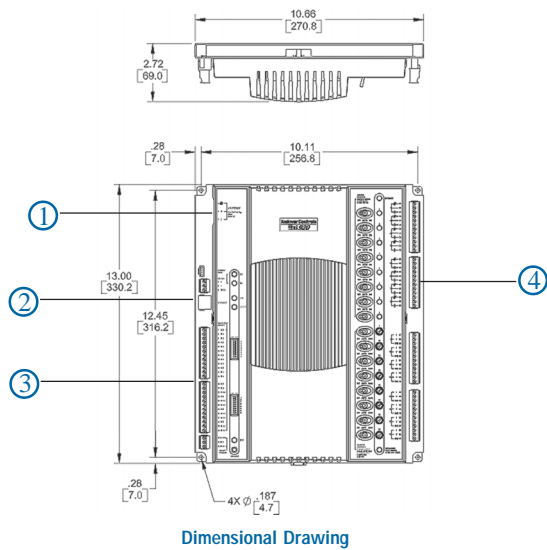


① Power Drawing



② Communications Drawing

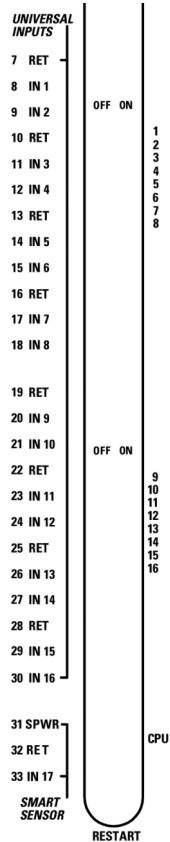

③ Inputs/Smart Sensor Drawing

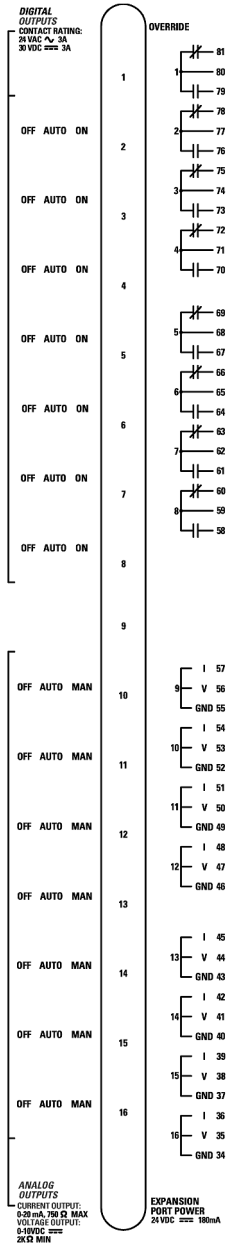

④ Outputs Drawing

SPECIFICATIONS

b4920 System Controller/BACnet Router

ELECTRICAL

Power:	115/230 VAC, +10% -15%, 50/60 Hz
Power Consumption:	45 VA
Overload Protection:	Fused with 3 amp fuse. MOV protected.
Real-Time Clock:	Battery-backed real-time clock

MECHANICAL

Operating Environment:	32°–120°F (0–49°C), 10–95% RH (non-condensing)
Size:	13.00"H x 10.66"W x 2.72"D (330.2H x 270.8 W x 69.0) mm
Weight:	3.5 lbs. (1.58 kg)
Enclosure Type:	UL Open class, IP 10. Flammability rating of UL94-5V
Mounting:	Panel mount

BATTERY

Battery Backup:	Replaceable, non-rechargeable, lithium battery. Provides 5 years typical accumulated power failure backup of RAM memory
------------------------	---

COMMUNICATIONS

Communications Interface, BACnet/IP:	10/100 twisted pair
Communications Speed, BACnet/IP:	10/100Mb
Communications Interface, BACnet MS/TP:	RS-485, 127 devices max.
Communications Speed, BACnet MS/TP:	9600, 19.2K, 38.4K, 76.8K baud*
BACnet Device Profile:	B-AAC, BACnet Advanced Application Controller
RS-485 Bus Length:	4,000 ft. (1,220m) standard; BACnet repeater allows extension to longer distances.
RS-485 Bus Media:	Twisted, shielded pair, low capacitance cable

Note: Baud rates REQUIRE Continuum V1.62 version (or later) of software

INPUTS/OUTPUTS

Inputs:	16 Universal inputs: Voltage (0-10 VDC); Temperature -30°F to 230°F (-34°C to 110°C), Digital (on/off), Counter (up to 4Hz at 50% duty cycle, 125 ms min. pulse width). Supervised Alarm (single or double resistor). Current input (0 - 20 mA) using external 500 ohm resistor 1 <i>Smart Sensor</i> Temperature Input (32°F to 105°F) (0°C to 41°C)
Input Voltage Range:	0-10 volts DC
Input Impedance:	30.1K ohm to 10V or 5M ohm with pull-up resistor disabled
Input Protection:	24 VAC or 24 VDC temporarily on any single channel, ±1000V transients (Tested according to EN61000-4-4)
Input Resolution:	2.5 mV
Input Accuracy:	±7.5mV (±0.25°C from -23°C to +54°C) or (±0.46°F from -10°F to +130°F)
Digital Outputs:	8 single pole single throw (SPST) Form C relays (Any two consecutive Form C outputs can be configured as one Form K Tri-state)

INPUTS/OUTPUTS (CONTINUED)

Output Rating:	Maximum 3A, 24VAC/VDC, ±1500V transients (Tested according to EN61000-4-4)
Output Accuracy:	0.1 sec. for pulse width modulation
Analog Outputs:	8 analog outputs
Output Rating:	0-10 VDC, or 4-20mA per channel
Output Resolution:	0.1V for 0-10V; 0.1mA for 4-20mA
Output Overrides:	Each output is equipped with a manual override switch. Software feedback of the switch position is provided, for display and alarming
Expansion Bus:	Interfaces to optional xPI I/O Expansion Modules

CONNECTIONS

Power:	3-position fixed screw terminal connector
Inputs:	Removable two-piece terminal strip
Outputs:	Removable two-piece terminal strip
Smart Sensor:	Removable two-piece terminal strip
Communications:	Removable two-piece terminal strip
Expansion Port:	6-position shrouded connector
Service Port:	4-position shrouded connector

USER LEDS/SWITCHES

Status Indicator LEDS:	
CPU	CPU Active
TD	Transmit Data - RS-485
RD	Receive Data - RS-485
Output	Output Status (per output)
EXPANSION PORT PWR	Power Status
OVERRIDE	Override Status
LINK & ACTIVITY	Ethernet

Switches:	
RESET	
Input Pull-up Resistor Switch (per input)	
Individual Output Override Switches	

GENERAL

Memory:	1MB SRAM, 2MB FLASH
Processor:	Motorola 32-bit Coldfire
Network Setup:	Via embedded web interface
Note:	b4920 REQUIRES Continuum V1.6 version (or later) of software

AGENCY LISTINGS

UL/CUL 916, FCC CFR 47 Part 15, ICES-003, EN55022, AS/NZS 3548, Class A, CE



OPTIONS

UL864, Smoke Control System Equipment, UUKL (b4920-S)

SMART SENSOR INTERFACE

The b4920 provides a built-in connection for Andover's *Smart Sensor*. The *Smart Sensor* provides a 2-character LED display and a 6-button programmable keypad that enables operators and occupants to change setpoints, balance VAV boxes, monitor occupancy status, and turn equipment on and off. An enhanced version of the *Smart Sensor* is also available with a 4-digit custom LCD that provides the following icons: PM, %, °, Setpoint, Cool, Heat, CFM, Fan, OA, and SP.

Andover Controls Corp.

World Headquarters

300 Brickstone Square
Andover, Massachusetts 01810 USA
Tel: +1 978 470 0555 Fax: +1 978 470 0946

Andover Controls Europe

Smisby Road
Ashby-de-la-Zouch
Leicestershire LE65 2UG England
Tel: +44 1530 417733
Fax: +44 1530 415436

Andover Controls Germany

Am Seerhein 8
D-78467 Konstanz
Germany
Tel: +49 7531 99370
Fax: +49 7531 993710

Andover Controls France

Immeuble Dolomites 2
58 Rue Roger Salengro
94126 Fontenay Sous
Bois Cedex, France
Tel: +33 1 53 99 16 16
Fax: +33 1 53 99 16 15

Andover Controls Poland

Radzikowskiego 56
31-315 Krakow
Poland
Tel: +48 126385500
Fax: +48 126385501

Andover Controls Asia

Unit 1201-02, Phase 1, Cheuk Nang Centre
9 Hillwood Road,
Tsim Sha Tsui East
Kowloon, Hong Kong
Tel: +852 2739 5497
Fax: +852 2739 7350

Andover Controls Mexico

Insurgentes Sur 1722-501
Col. Florida
Mexico D.F. 01030, Mexico
Tel: +5255 5661 5672
Fax: +5255 5661 5415

www.andovercontrols.com

AndoverControls
WE'RE BUILDING SMART

A Balfour Beatty Company