

## AFM-IVA3MP-D


3MP, True WDR, P-Iris & Motorized AF,  
Industrial Outdoor Network Dome Camera



### Key Features

- Enhanced H.264 offers optimally useable bandwidth and storage
- Multiple H.264/MJPEG video streams
- Max. 3Mp@30(25)fps resolution
- Build-in megapixel motorized lens with P-Iris control
- Built-in enhanced IR illumination, Effective up to 30 Meters
- True WDR for better visibility
- IVAs for motion, tampering, intrusion, loitering, line counting, borderline, abandoned, departure, area counting, withdrawn, and adverse way
- Bi-directional audio communications
- Accessible Edge Storage with Micro SDHC/SDXC (card not included)
- Robust mechanical design of IP67/IK10-rated
- Power input DC12V/AC24V and PoE
- ONVIF Profile S/G/Q conformant
- Class B of CE/FCC certified

### Dimensions

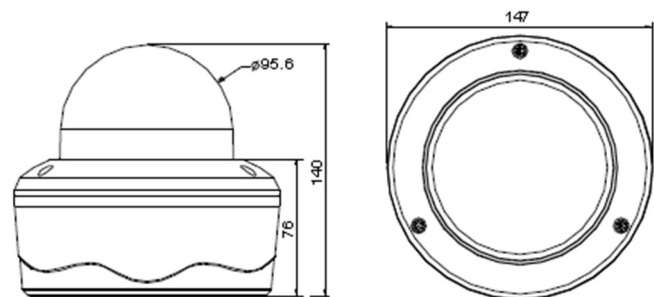

## Specifications

MODEL	AFM-IVA3MP-D
<b>Video</b>	
Image Sensor	1 /2.8" progressive scan CMOS sensor
System	NTSC, PAL
Video Standard	Enhanced H.264 main profile/high profile/baseline profile (MPEG-4 Part 10/AVC), Motion JPEG
Multiple Video Stream	Triple streams, Multiple video profiles support
Advanced Bitrate Control	Controllable bit rate dynamics: CVBR/CBR/VBR ,Advanced quality of service (QoS) Multi-level group of pictures (GOP)
Resolution & Frame Rate	3Mp(2304x1296), Full HD 1080p, 1.3Mp(1280x960), HDTV 720p to 320x176 at 30/25fps
Video out	1x composite video out, 1.0 Vp-p, 75 ohms, RCA
Lens	Megapixel motorized lens, f3.6~10mm, F1.5, P-Iris , Motorized remote lens control: zoom (optical 2.8x), focus, autofocus
FOV	Wide: 86°(H) 63°(V) Tele: 32°(H) 24° (V)
Day & Night	True D&N by automatically removable IR-cut filter (ICR) with modes control Night illumination by 22pcs enhanced IR LED, 850nm, effective distance 30m
Minimum Illumination	Color: TBD Lux, BW: TBD Lux
Color Contour	Brightness, contrast, hue, saturation, sharpness configurable
Imaging	Individually configurable white balance (2,500~10,000K), auto and manual gain, multi-metering backlight compensation, multi-zone privacy masks, and video orientations
Exposure Control	Auto shutter: max. shutter 1/7.5(6.25)~1/60(50) / min.shutter: 1/120(100)~1/10000, manual shutter, shutter priority, flicker less modes manageable
Corridor Format	Yes
Wide Dynamic Range	True WDR, up to 120dB
Gamma Correction	0.45, 1
S/N Ratio	More than 50dB when AGC off
Noise Reduction	New generation 3DNR technology
<b>Audio</b>	
Audio Standard	G.711 a/μ-law support Bi-directional audio communications
Input / Output	1 x audio line input, 1 x audio line output, terminal block
<b>Network</b>	
Ethernet	IEEE 802.3, 10/100/1000 Base-T/TX, auto sensing, 1 x RJ45
Protocols	ARP, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4/6, NTP, RTSP/RTCP/RTP, QoS, SMTP, SNMP, TCP, TLS/TTLS, UDP, UPnP, 802.1X
Internet Security	IEEE 802.1X network access control, HTTPS encryption, digest authentication, IP filtering
Network Management	Simple network management (SNMP) v1/2c/3, trap/heartbeat support, MIB download
Easy Setup	Top view SDK-based IP Finder, UPnP
Web Surveillance	Full-feature, multi-web browser support: Internet Explorer 10.0, Chrome, Firefox, Mac Safari
Viewing System	Quick time, VLC player
<b>System Integration</b>	
Sensor Input / Alarm Output	1 x alarm input, 1 x relay output, terminal block, type/dwell time configurable
Video Content Analysis	Motion, tampering, intrusion, loitering, line counting, borderline, abandoned, departure, area counting, withdrawn, adverse way
Event Source	Schedule, alarm input, motion/tampering, audio intensity detection, network loss detection
SDK	Top view SDK 2.5
Alliance	ONVIF Profile S/G/Q, test tool 16.01 conformant
<b>Edge Recording</b>	
Local Storage	1 x microSDHC/SDXC slot (card not incl)
Event Handling & Recording	Schedule recording, alarm out, E-mail notification , FTP recording, edge SD recording, sound playback , OSD indication

# IP CAMERAS ( I-SERIES )

www.afmvision.com

<b>General</b>	
Unit Configuration	System information overview, camera ID setup, OSD text overlay, date/time sync, software reboot and factory default, remote hardware default On-board camera reset and factory default buttons
User Authentication	Multiple user group, password protected
Profile Management	User configurations import, export
Firmware Update	Web update
Language	English, multi-language customized support
Log Listing	System log listing, export support
<b>Mechanical</b>	
Weather Resistance	IP67 certified
Vandalizing Resistance	IK10 compliant
Casing	3-piece easy installation design ,Surface and in-ceiling mount, Fall-prevention safety sling, screws, hook, fixture Cast aluminum, polycarbonate clear bubble , 3-axis lens angle adjustment
Dimension (DxH)	Ø 147x140mm
Weight	1890g(approx.)
<b>Electrical</b>	
Component Standard	Industrial grade
Input Voltage	AC24V, 2-pin terminal block
Power-over-Ethernet	IEEE 802.3at (PoE+), class 4 compliant
Power Consumption	AC24V 22W , PoE+ 20.5W
Temperature Control	On-board heating device
Surge Protection	EN55024 certified
<b>Environmental</b>	
Operating Condition	-40°C ~ 60°C , Humidity 90% non-condensing
Power-On Temperature	Arctic power-on support at -40°C
Storage Condition	-40°C ~ 60°C , Humidity 90% non-condensing
<b>Edge Recording</b>	
Local Storage	1 x microSDHC/SDXC slot (card not included)
Event Handling & Recording	Schedule recording, alarm out, E-mail notification , FTP recording, edge SD recording, sound playback , OSD indication
<b>Regulatory</b>	
Standards	CE/FCC, Class B certified , RoHS, REACH compliant ,UL/cUL 60950-1 compliant
Third-Party Licensing	H.264/AVC encoder licensed for manufacturing

\* Specifications are subject to change without prior notice

Email: [Info@afmvision.com](mailto:Info@afmvision.com)

The Bristol Office 2nd Floor,

5 High Street Westbury-On-Trym Bristol, BS9 3BY, England, United Kingdom

Tel: +44-2071014437

AFMVISION UK log and other trademarks associated with AFMVISION UK products referred to in this publication are trademarks of AFMVISION UK technologies. Ltd

All other product names and services are the property of their respective companies.

ONVIF and ONVIF logo are trademarks of ONVIF.