

AFM-IVA3MP-LPR

3MP LPR/ANPR

Industrial Outdoor Network Bullet Camera



Lane
Monitor



Profile



Traffic



Smart IR



IP66




IK10

Key Features

- Enhanced H.264 offers optimally useable bandwidth and storage
- Multiple H.264/MJPEG video streams
- Max. 3Mp@30(25)fps resolution
- Superior bright light and ultra-low-light performance
- Built-in smart IR illumination, Effective up to 30 Meters
- Suitable for LPR applications up to 80km/h
- Multi-lane traffic monitoring
- Customizable profile configuration
- Intelligent traffic modes
- IVAs for motion, tampering, borderline and line counting
- Built-in heater against extreme temperature from 50 °C to -40 °C
- Robust mechanical design of IP66/NEMA 4X/IK10-rated
- ONVIF Profile S/G/Q conformant
- Class A of CE/FCC certified

Dimensions

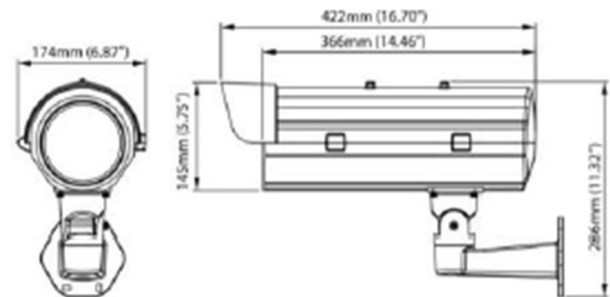

Specifications

MODEL	AFM-IVA3MP-LPR
Video	
Image Sensor	1 /2.8" progressive scan CMOS sensor
System	NTSC, PAL
Video Standard	Enhanced H.264 main profile/high profile/baseline profile (MPEG-4 Part 10/AVC), Motion JPEG
Multiple Video Stream	Triple streams, Multiple video profiles support
Advanced Bitrate Control	Controllable bit rate dynamics: CVBR/CBR/VBR ,Advanced quality of service (QoS) Multi-level group of pictures (GOP),Region of interest (ROI)
Resolution & Frame Rate	3Mp(2304x1296), Full HD 1080p, 1.3Mp(1280x960), HDTV 720p to 320x176 at 30/25fps
Lens	Megapixel varifocal lens, f7.5~50mm, F1.5, auto iris, 6.6X optical zoom,External ABF(automatics back focus) control
FOV	TBD
Day & Night	True D&N by automatically removable IR-cut filter (ICR) with modes control Night illumination by 8pcs smart IR LED, 850nm, effective distance 30m
Minimum Illumination	Color: TBD lux at 50 IRE, F1.5 (approx.) BW: TBD lux at 50 IRE, F1.5
Color Contour	Brightness, contrast, hue, saturation, sharpness configurable
Imaging	Individually configurable white balance (2,500~10,000K),auto and manual gain, multi-metering backlight compensation, multi-zone privacy masks, and video orientations
Exposure Control	Auto: max. shutter 1/7.5(6.25)~1/60(50) / min. shutter: 1/120(100)~1/10000 Manual: 1/30(25)~1/10000 Shutter-Priority: 7.5(6.25)~1/10000
Corridor Format	Yes
Wide Dynamic Range	Digital WDR
Imaging Enhancement	Digital defog, HLC, 3DNR
Gamma Correction	0.45, 1
S/N Ratio	More than 50dB when AGC off
Audio	
Audio Standard	G.711 a/μ-law support Bi-directional audio communications
Input / Output	1 x audio line input, 1 x audio line output, terminal block
Network	
Ethernet	IEEE 802.3, 10/100/1000 Base-T/TX, auto sensing, 1 x RJ45
Extra Ethernet Interface	1x mini USB port for real-time image preview
Protocols	ARP, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4/6,NTP, RTSP/RTCP/RTP, QoS, SMTP, SNMP, TCP, TLS/TTLS, UDP, UPnP, 802.1X
Internet Security	IEEE 802.1X network access control, HTTPS encryption, digest authentication, IP filtering
Network Management	Simple network management (SNMP) v1/2c/3, trap/heartbeat support, MIB download
Easy Setup	Top view SDK-based IP Finder, UPnP
Web Surveillance	Full-feature, multi-web browser support: Internet Explorer 10.0, Chrome, Firefox, Mac Safari
Viewing System	Quick time, VLC player
System Integration	
Remote Control	1x RS-485 port, Sync with IR LED
Video Content Analysis	Motion, tampering, intrusion, loitering, line counting
Event Source	Schedule, alarm input, motion/tampering, audio intensity detection, network loss detection
Sensor Input / Alarm Output	2 x alarm input, 2 x relay output, terminal block, type/dwell time configurable
Intelligent Traffic Mode	4 modes including city surveillance, highway, entry/toll and parking lot
Customizable Profile	4 customizable parameters options to meet various field conditions for best performance on 24/7 application
SDK	Top view SDK 2.5
Alliance	ONVIF Profile S/G/Q, test tool 16.01 conformant
Edge Recording	
Local Storage	1 x microSDHC/SDXC slot (card not incl)
Event Handling & Recording	Schedule recording, alarm out, E-mail notification , FTP recording, edge SD recording, sound playback , OSD indication

LPR IP CAMERAS (I-SERIES)

www.afmvision.com

General	
Unit Configuration	System information overview, camera ID setup, OSD text overlay, date/time sync, software reboot and factory default, remote hardware default On-board camera reset and factory default buttons
User Authentication	Multiple user group, password protected
Profile Management	User configurations import, export
Firmware Update	Web update
Language	English, multi-language customized support
Log Listing	System log listing, export support
Mechanical	
Weather Resistance	IP66 certified , NEMA 4X
Vandalizing Resistance	IK10 compliant
Casing	Body/Bracket: Cast aluminum Internal cable management 6mm tempered glass cover
Dimension (DxH)	Ø174x422x145mm
Weight	6000g(approx.)
Electrical	
Component Standard	Industrial grade
Input Voltage	AC24V or 90-260V (Optional)
Power Consumption	53 W (max)
Temperature Control	heater device
Surge Protection	EN55024 certified
Environmental	
Operating Condition	-40°C ~ 60°C , Humidity 90% non-condensing
Power-On Temperature	Arctic power-on support at -40°C
Storage Condition	-40°C ~ 60°C , Humidity 90% non-condensing
Edge Recording	
Local Storage	1 x microSDHC/SDXC slot (card not included)
Event Handling & Recording	Schedule recording, alarm out, E-mail notification , FTP recording, edge SD recording, sound playback , OSD indication

Email: Info@afmvision.com

The Bristol Office 2nd Floor,
5 High Street Westbury-On-Trym Bristol, BS9 3BY, England, United Kingdom
Tel: +44-2071014437

AFMVISION UK log and other trademarks associated with AFMVISION UK products referred to in this publication are trademarks of AFMVISION UK technologies. Ltd

All other product names and services are the property of their respective companies.

ONVIF and ONVIF logo are trademarks of ONVIF