

32CH Embedded FHD IP NVR


AFM-VR32SP



Features

- Full HD Live/playback/ Recording
- 480fps@1080p 16ch simultaneous playback(32ch playback @720p)
- Plug and play & auto configuration for IP camera
- P2P camera connection supported by internal HUB
- POE camera support (802.3at PSE ,Optional)
- Linear Digital zoom / Automatic sequencing / Freezing
- Quadplex (Live / Record / Playback / Network)
- Panorama (Thumbnail) search
- 130Mbps support
- RAID 5/ NAS support
- eSATA for storage extension (Up to 5 more HDD)

System Connection

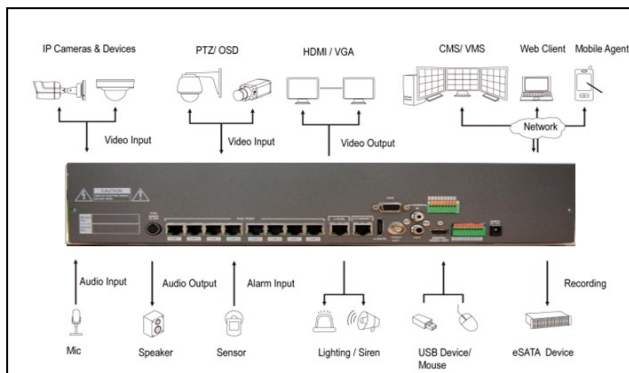

Specification

MODEL	AFM-VR32SP
System	
Operating System	Embedded LINUX
Max. HDD	6x SATA HDD
Video& Audio	
Protocol	ONVIF
Video In	32 Ch (IP camera)
No. of PoE	8 Ch (802.3at)
Video Out	HDMI, VGA, Composite
Display Speed	960 fps@D1, 960 fps@720p, 480 fps@1080p
Audio IN / Out	1ch / 1ch
Alarm Input / Out	16ch / 1ch
Recording	
Recording Speed	960 fps@720p, 480 fps@1080p
Recording Mode	Continuous Schedule, Sensor, Motion, Pre&Post Alarm
Playback	
Speed	960 fps@D1, 960 fps@720p, 480 fps@1080p
Channel	1 / 4 / 9 / 16 / 32
Search	Time /Calendar / Event /Panorama /VCA Metadata
Backup	USB /HDD, AVI, DVR format
Network	
LAN	Gigabit Ethernet (RJ45), Local (RJ45)
Advanced Function	1) Live Monitoring, Playback and File Backup on Remote
	2) Multi client connection
	3) Remote monitoring by windows viewer, web, iphone/Android
Management	CMS & RMA(PocketViewer), Web (IE)
General	
System Recovery	Auto-Reboot and Journaling File System
Advanced Functions	1) Dual recording, Quadplex operation, AVI Backup
	2) HDD SMART , Watchdog, Temperature /Record integrity
	3) Panoramic (Thumbnail) search
	4) Linear Digital zoom, Auto port forwarding, system Logging
Power	System (12V x 10A D/C), PoE (DC48V/2.5A)
Operating Temperature	0~40 °C / 10~90% RH
Dimension (W x D x H)	430 x 443 x 88 (mm) / 2U
Certification	CE & FCC

*Specifications are subject to change without prior notice for improvement