

AFM-WDR-3MP-D

3 Megapixel WDR IP Dome Camera



Key Features:


- UP to 3 megapixel resolution(2048×1536)
- Max 20fps@3MP(2048×1536)&25/30fps@1080p(1920×1080)
- H.264&MJPEG dual-stream encoding
- Super WDR
- Advanced H.264 High Profile Level@4 compression
- Day/Night(ICR)&3D DNR&AWB&AGC&BLC
- Alarm&Audio&RS485 interface(only for Full Function model)
- Support mobile phone monitoring and P2P function
- POE function
- IP66 rating
- Bracket optional(Wall mounting/Lifting)
- Support SD card maximum storage 32G (optional)

Specification:


Model NO		AFM-WDR-3MP-D	
Media Processor		High-performance TI DaVinci DSP	
Image Sensor		1/3" 3MP progressive scan CMOS	
Shuttle time		1/5s to 1/50,000s	
Lens		2.8~12mm optional	
IR Range		≤20m	
Day&Night		IR cut filter with auto switch	
Compression			
Video Compression		H.264/MJPEG	
H.264 coding standard		H.264 Baseline/Main Profile/High-profile	
Audio Compression		G.711a/G.711u/RAW_PCM	
Audio Bit Rate		G.711a(8kbps)/G.711u(8kbps)/RAW_PCM(16kbps)	
Image			
Max Image Size		2048(H)×1536(V)	
Stream		Dual-stream	
Frame Rate		Main Stream : 50Hz:20fps (2048 × 1536),25fps (1920 × 1080), 60Hz:20fps (2048 × 1536),30fps (1920 × 1080), 30fps (1920 080), Sub-stream : 50Hz: 25fps(640 × 480); 60Hz: 30fps (640 × 480)	
Network			
Alarm Trigger		Motion detection, tampering alarm, network disconnect, storage exception	
Protocols		IPv4/IPv6, RTSP/RTP/RTCP, TCP/UDP, HTTP, DHCP, DNS, FTP, DDNS, PPPoE, SMTP, Onvif V2.4	
Onvif		V2.4 Version	
Interface			
Audio In	Full Function	1-channel 3.5mm audio interface MIC IN/Line IN	
Audio Out		1-channel 3.5mm audio interface (line level,600Ω)	
RS485		Yes (half duplex)	
Alarm		1 In/1 Out	
Video Out		1Vp-p Composite Output (75Ω/BNC)	
SD card		maximum storage 32G	
Network		1 RJ45 10M/100M adaptive Ethernet port	
Reset		A reset button (press and hold 3 seconds valid)	
General Specifications			

Operating Conditions	-40°C ~ 60°C, humidity less than 95%
Power Supply	DC12V±10%(Poe: optional)
Power Consumption	6W
Weather proof rating	IP66
Dimensions(mm)	148×148×121
Weight(kg)	0.77


Dimension:

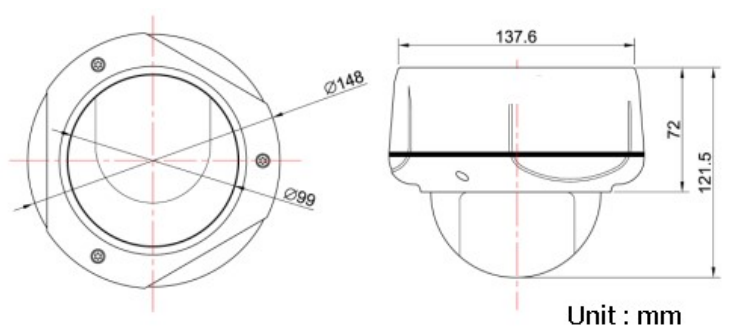

Interface Cable:

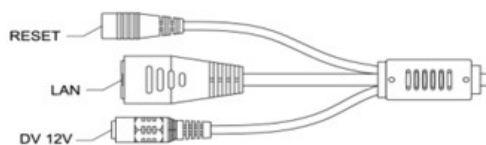

Basic Function

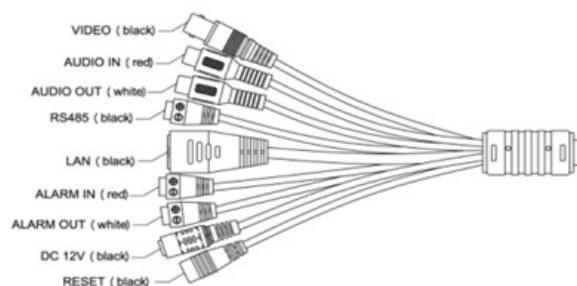

Full Function

Accessories:



Wall mounting bracket



Lifting bracket