




Aleph's Reliable magnetic Contacts **1" - 3" Gap**

Lifetime Warranty /Superior Quality/ Exceeding 400 Million Cycles, Because we manufacture and use our own hermetically sealed reed switches, the quality and reliability of Aleph Magnetic Contacts is second to none. Their mechanical life expectancy is in excess of 400 million cycles. Models are available in white (W), brown (B), or gray (G) as indicated.

Alnico and ferrite premium quality magnets are used. Models without leads feature concealed mounting and terminal screws, and tamper-resistant covers. Mounting hardware is included. Maximum contact rating is 10W (form "A") or 3W (Form "C" resistive load), with a switching voltage of 30 VDC @ 0.5 amp DC. All Aleph contacts come with a 5-for-1 lifetime guarantee.





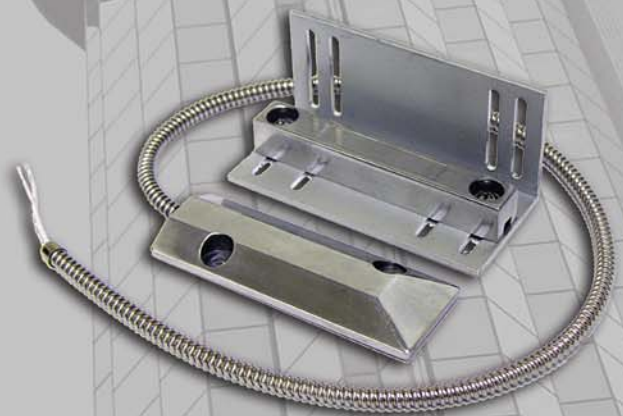










Aleph Europe Ltd.
1 Newton Close, Park Farm,
Wellingborough, Northants
NN8 6UW, England
Phone: +44 1933 679600
Fax: +44 1933 401165
E-mail: info@alepheurope.com

Aleph Central Europe Inc.
Hungary 2146 Mogyoród Pf.:16, Kerektó u. 2.
Tel. +36 28 542 250, Fax: +36 28 542 251
E-mail: sales@alephsecurity.com





Hermetically Sealed Switches / Rhodium Over Gold Reeds / UL Listed / High Grade Magnets / Multiple Colors

<p>DC-2611</p> <ul style="list-style-type: none"> - 3/8" Press Fit - Terminal Contact - Crush Resistant 	<p>DC-1551 WG</p> <ul style="list-style-type: none"> - 1" Wide Gap - C/C Loop - 18" Wire Leads 
<p>DC-1631 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap - C/C Loop / Mini size - 1/4" Diameter / 18" Wire Leads - Crush Resistant 	<p>DC-1561 WG</p> <ul style="list-style-type: none"> - 1" Wire Gap - C/C Loop - 18" Wire Leads - With mounting screws and adhesive tape - Crush Resistant 
<p>DC-1671</p> <ul style="list-style-type: none"> - 1" Gap - 18" Leads - Rare Earth Donut Magnet - Crush Resistant 	<p>DC-1581 WG</p> <ul style="list-style-type: none"> - 1" Wide Gap - C/C Loop - Simple Installation / 18" wire leads - With mounting screws and adhesive tape - Crush Resistant 
<p>DC-1621 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap - C/C Loop / 3/8" Diameter - 18" Wire Leads - Crush Resistant 	<p>DC-2531 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap - C/C Loop/Slim design - With mounting screws, adhesive tape and terminal screws cover-up tape - Crush Resistant 
<p>PS-1650</p> <ul style="list-style-type: none"> - 1/2" Wide Gap – 3/8" Diameter - C/C Loop - Simple Installation / 18" wire leads - Crush Resistant 	<p>DC-2541 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap - C/C Loop / Industry standard model - With mounting screws, cover and spacer - Crush Resistant 
<p>DC-1651 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap – 3/8" stubby - C/C Loop / Stubby switch and magnet - Simple Installation / 18" wire leads - Crush Resistant 	<p>PS-2023</p> <ul style="list-style-type: none"> - 3" Gap - C/C Loop - Adjustable bracket - Crush Resistant 
<p>PS-1523 WG</p> <ul style="list-style-type: none"> - 1 1/4" Wide Gap - C/C Loop - Concealed mounting screws and terminals - Crush Resistant 	<p>DC-1813</p> <ul style="list-style-type: none"> - 3/4" Steel Door Contact - 3/4" Gap - 12" Wire Leads - Crush Resistant 
<p>PS-1541-WG</p> <ul style="list-style-type: none"> - 1" Wide Gap - C/C Loop - 24" Wire Leads / adhesive tape - Crush Resistant 	<p>DC-1814</p> <ul style="list-style-type: none"> - 3/4" Contact 3/8" Magnet - 3/4" Gap - 12" Wire Leads - Crush Resistant 