


# MegaDome® G3 IP Megapixel Cameras

1.2, 1080p, 3, 5, and 10 Megapixel (MP) H.264 All-in-One Motorized P-Iris Lens True Day/Night Indoor/Outdoor Dome IP Cameras with SNAPstream™ (Smart Noise Adaptation and Processing), WDR (Wide Dynamic Range), STELLAR™ (Spatio Temporal Low Light Architecture), and IR LED Models



MegaDome® G3 third generation multi-megapixel cameras provide ample resolution to zoom-in for details in live or recorded video. These indoor/outdoor all-in-one solutions integrate a 1.2, 1080p, 3, 5 or 10-megapixel (MP) sensor with fast frame rates, and SNAPstream™ (Smart Noise Adaptation and Processing) technology to reduce bandwidth without impacting image quality. Together with an IR corrected motorized, P-iris wide angle or telephoto varifocal

lens, remote focus and remote zoom make MegaDome G3 easy to install and manage. The installer-friendly housing is IP66 environmental rated and IK-10 impact-resistant. MegaDome G3 is feature-loaded, and select models include STELLAR™ (Spatio Temporal Low Light Architecture) for best-in-class light sensitivity capturing details in near complete darkness, or wide dynamic range (WDR) for applications with bright or over saturated lighting conditions.

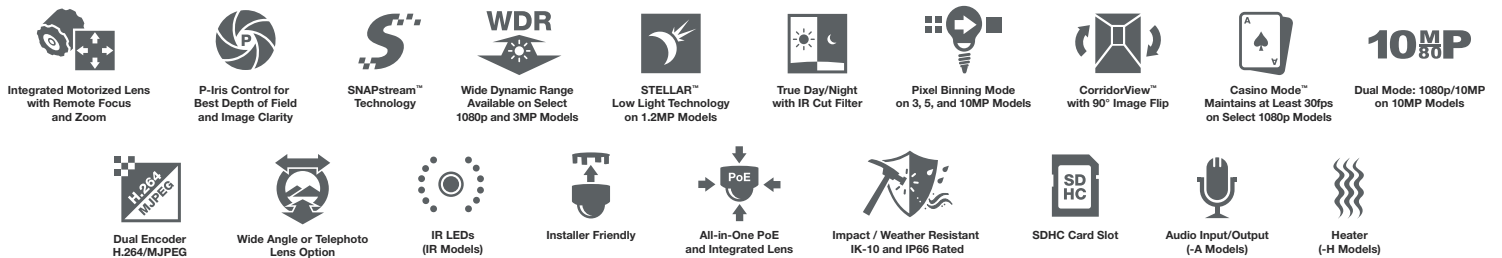

## Series Features

- 1.2, 1080p, 3, 5, and 10MP Models
- Remote Focus/Zoom Motorized, P-Iris Lens
- SNAPstream™ Capability to Reduce Bandwidth without Impacting Image Quality
- P-Iris Control to Get Best Depth of Field and Image Clarity
- Wide Angle or Telephoto Lens Options
- STELLAR™ (Spatio Temporal Low Light Architecture) Reduces Motion Blur, Noise and Storage Requirements, While Enhancing Contrast and Allowing Color Imaging in Near Complete Darkness on 1.2MP Models
- Optional True WDR up to 100dB at Full Resolution Available on Select 1080p and 3MP Models: See Clearly in Shaded and Bright Light Conditions Simultaneously
- True Day/Night Functionality with Mechanical IR Cut Filter and Optional IR LEDs
- Binning Mode for Strong Low Light Performance on 3MP, 5MP and 10MP Cameras
- Casino Mode™ Guarantees Continuous 30fps Frame Rate Required by Gaming Industry Regulations on Select 1080p Models
- CorridorView™ Allows 90° Image Rotation for Better Coverage in Hallways and Corridors
- Privacy Mask, Motion Detection, Flexible Cropping, Bit Rate Control, Multi-Streaming, Multicasting, and Forensic Zooming
- Dual Encoder H.264/MJPEG
- Heater and Optional Audio and IR LEDs (No Heater Required for WDR and STELLAR Models)
- SDHC Card Slot for Onboard Storage
- Network Protocols Include HTTPS†, 802.1x, DHCP, and More
- Total PoE Solution (No External Power Required for Heater and IR LEDs), PoE and Auxiliary Power: 12–48V DC/24V AC
- Outdoor Rated IP66 and IK-10 Impact-Resistant Housing
- Easily Adjustable 3-Axis Gimbal

† HTTPS cannot be used with STELLAR™ or audio functionality

Camera Specifications

Model	AV1355	AV2355	AV2356	AV3355	AV3356	AV5355	AV10355	
<b>Image Sensor (CMOS)</b>	1.2MP*	1080p	1080p**	3MP**	3MP	5MP	10MP	
<b>Day/Night</b>	True Day/Night with Automatic Removable IR Cut Filter							
<b>Optical Format</b>	1/3"	1/3"	1/3.2"	1/3"	1/3.2"	1/2.5"	1/2.3"	
<b>Pixel Pitch</b>	3.75µm	2.2µm	2.2µm	2.2µm	2.2µm	2.2µm	1.67µm	
<b>Minimum Illumination</b>	Color (Day Mode)	0.02 Lux	0.2 Lux	0.2 Lux	0.2 Lux	0.2 Lux	0.42 Lux	
	Color Binning (Day Mode)	-	-	-	0.1Lux	0.1Lux	0.21 Lux	
	B/W (Night Mode)	0.002 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.02 Lux, IR sensitive	0.03 Lux, IR sensitive	0.04 Lux, IR sensitive
<b>Full FOV Resolution</b>	1280 H x 960 V	1920 H x 1080 V	1920 H x 1080 V	2048 H x 1536 V	2048 H x 1536 V	2560 H x 1920 V	3648 H x 2746 V	
<b>1/4 Resolution</b>	640 H x 480 V	960 H x 540 V	960 H x 540 V	1024 H x 768 V	1024 H x 768 V	1280 H x 960 V	1824 H x 1373 V	
<b>Dynamic Range</b>	83.5dB	69.5dB	WDR up to 100dB	69.5dB	WDR up to 100dB	70.1dB	57.2dB	
<b>Maximum SNR</b>	54dB	45dB	49dB	45dB	49dB	45dB	40dB	
<b>Frame Rates†</b>	At Max Resolution	37fps (1280 x 960)	30fps (1920 x 1080)	30fps (1920 x 1080)	21fps (2048 x 1536)	21fps (2048 x 1536)	14fps (2560 x 1920)	7fps (3648 x 2752)
	Cropped	-	30fps (1280 x 1024)	30fps (1280 x 1024)	30fps (1920 x 1080) 30fps (1280 x 1024)	30fps (1920 x 1080) 30fps (1280 x 1024)	21fps (2048 x 1536) 29fps (1920 x 1080) 41fps (1280 x 1024)	12fps (2592 x 1944) 18fps (2048 x 1536) 25fps (1920 x 1080) 37fps (1280 x 1024)
	Binning Mode	-	-	-	46fps (1024 x 768) 64fps (960 x 540)	21fps (1024 x 768) 21fps (800 x 600) 21fps (960 x 540) 21fps (640 x 512)	34fps (1296 x 972) 46fps (1024 x 768) 64fps (960 x 540)	29fps (1920 x 1080) 26fps (1824 x 1376) 43fps (1296 x 972) 54fps (1024 x 768)
<b>Lens</b>	Wide Angle Motorized (PMIR-S Models)	3–9mm, 1/2.7", F1.2, RZ, RF, P-iris, H-FOV = 101°–32°	2.8–8mm, 1/2.7", F1.2, RZ, RF, P-iris, H-FOV = 86°–32°	2.8–8mm, 1/2.7", F1.2, RZ, RF, P-iris, H-FOV = 86°–32°	2.8–8mm, 1/2.7", F1.2, RZ, RF, P-iris, H-FOV = 104°–39°	2.8–8mm, 1/2.7", F1.2, RZ, RF, P-iris, H-FOV = 104°–39°	3–8mm, 1/2.5", F1.4, RZ, RF, P-iris, H-FOV = 113°–43°	4–8mm, 1/2.3", F1.6, RZ, RF, P-iris, H-FOV = 89°–47°
	Telephoto Motorized (PMTIR-S Models)	-	8–22mm, 1/2.7", F1.6, RZ, RF, P-Iris, Telephoto, H-FOV = 30°–12°	8–22mm, 1/2.7", F1.6, RZ, RF, P-Iris, Telephoto, H-FOV = 30°–12°	8–22mm, 1/2.7", F1.6, RZ, RF, P-Iris, Telephoto, H-FOV = 32°–12°	8–22mm, 1/2.7", F1.6, RZ, RF, P-Iris, Telephoto, H-FOV = 32°–12°	9–22mm, 1/2.5", F2.0, RZ, RF, P-Iris, Telephoto, H-FOV = 38°–16°	12–22mm, 1/2.3", F2.2, RZ, RF, P-Iris, Telephoto, H-FOV = 30°–17°

\* STELLAR™ Model \*\* Effective

Programmability

<b>Optics</b>	Remote focus, remote zoom, P-iris
<b>Low Light Performance</b>	<b>Pixel Binning Mode</b> 3, 5 and 10MP models
<b>Programmable Shutter Speed</b>	Controls motion blur, 1ms–500ms
<b>Motion Detection</b>	Real-time, 1024 detection zones
<b>Privacy Masking</b>	Unlimited
<b>Casino Mode™</b>	Maintains 30fps or higher (AV2355 models)
<b>Flexible Cropping</b>	Resolution windowing down to 1x1 pixel for JPEG and 2x2 pixels for H.264
<b>Backlight Compensation</b>	Multi-matrix white balance
<b>Flicker Control</b>	5Hz–255Hz adjustable
<b>Image Rotation</b>	CorridorView™ (90°, 180° and 270° image rotation)
<b>Wide Dynamic Range</b>	Auto adjustment between WDR and LDR modes (WDR models only)
<b>Noise Reduction</b>	Low light noise filter control
<b>Efficiency</b>	SNAPstream™ (Smart Noise Adaptation and Processing)
	Bit rate and bandwidth limitation control
	Bandwidth and storage savings by running at 1/4 resolution
<b>Sharpness</b>	Selectable enhancement level
<b>Miscellaneous</b>	Programmable resolution, brightness, saturation, gamma, tint
	Electronic pan, tilt, zoom (PTZ)

Data Transmission

<b>Compression Type</b>	H.264 (MPEG-4, Part 10) / Motion JPEG	
	21 levels of quality	
<b>Network Protocols</b>	RTSP, RTP/TCP, RTP/UDP, HTTP, DHCP, TFTP, HTTPS†, 802.1x	
<b>Network Interface</b>	100Base-T Ethernet	
<b>Multi-Streaming</b>	<b>1.2–5MP Models</b>	8 non-identical streams
	<b>10MP Models</b>	4 non-identical streams

Compliance

<b>Industry Standard</b>	ONVIF Profile S conformant
<b>Listings</b>	UL (CB)
<b>FCC Compliance</b>	47 CFR 15 Class A
<b>Environmental</b>	RoHS, REACH, WEEE
<b>Markings</b>	CE: EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1
<b>Networking Standard</b>	IEEE 802.3af-2003 PoE Standard, Class 3, IPv4, 802.1x
<b>Mechanical</b>	IK-10 (EN62262), IP66 (EN60529)
<b>CoO</b>	Made in the USA

† Maximum with H.264 compression ‡ HTTPS cannot be used with STELLAR™ or audio functionality

Environmental

<b>Operating temperature</b>	-40°C (-40°F) to +50°C (122°F) w/ Heater or WDR/STELLAR™ Models w/o Heater
<b>Humidity</b>	0% to 90% (non-condensing)
<b>Storage temperature</b>	-40°C (-40°F) to +60°C (140°F)

Electrical

<b>Alarm Input/Output</b>	General purpose opto-coupled, 1 input / 1 output
<b>Power Over Ethernet</b>	PoE 802.3af, Class 3
<b>Auxiliary Power</b>	12–48V DC, 24V AC

Max Power Consumption (Watts DC power)

Model	AV1355	AV2355	AV2356	AV3355	AV3356	AV5355	AV10355
<b>PM-S</b>	10.9	-	-	-	-	-	-
<b>PMIR-S</b>	11.9	-	12.7	-	12.7	-	-
<b>PMIR-SA</b>	-	-	-	-	12.7	-	-
<b>PMIR-SAH</b>	-	12.1	-	-	-	12.1	-
<b>PMIR-SH</b>	-	12.1	-	12.1	-	12.1	13.0
<b>PMTIR-S</b>	-	-	14.2	-	14.2	-	-
<b>PMTIR-SH</b>	-	14.5	-	14.4	-	14.4	13.8

IR Illuminator (IR models only)

<b>PMIR</b>	12 pcs 850nm LEDs / 50ft (15m) IR distance (max) / 60° and 80° IR angle
<b>PMTIR</b>	12 pcs 850nm LEDs / 120ft (36m) IR distance (max) / 40° IR angle
<b>Power Over Ethernet</b>	Total PoE solution (No external power requirement)

Audio Electrical (-A and -AH models only)

<b>Streaming</b>	Two-way
<b>Compression</b>	G.711 PCM 8 kHz
<b>Input/Output</b>	Microphone in or line in / line output


Heater Electrical (-H and -AH models only)

<b>Power Consumption</b>	2.28 W max
<b>Switch</b>	On: 4°C (32.9°F), Off: 6.5°C (43.7°F)
<b>Power Over Ethernet</b>	Total PoE solution (No external power requirement)

Mechanical

<b>Casing</b>	Die-cast aluminum chassis with 4" polycarbonate dome bubble	
	IP66 weather proof standard	
	Impact resistant, IK-10 rated	
<b>Gimbal</b>	Easily adjustable 3-axis camera gimbal w/360° pan, 77° tilt and 180° z-axis	
<b>Dimensions</b> <i>(See Dimensions)</i>	<b>Unit</b>	Ø 5.77" (146.7mm) x 5" H (128mm)
	<b>Packaged</b>	6" H (150mm) x 7.5" W (190mm) x 8" L (200mm)
<b>Weight</b>	<b>Unit</b>	2.25 lbs (1.02 kg)
	<b>Packaged</b>	2.8 lbs (1.27 kg)
<b>On Board Storage</b>	SDHC slot up to 32GB (Card not included)	

Dimensions

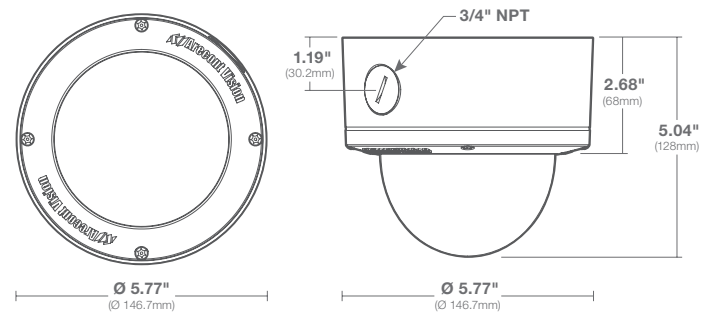

# Ordering Information



## Model Specific Features

Model	Resolution	Frame Rate†	Features		
AV1355	1.2MP	37fps	-	-	STELLAR™
AV2355	1080p	30fps	-	Casino Mode™	-
AV2356	1080p	30fps	WDR	-	-
AV3355	3MP	21fps	-	-	Binning
AV3356	3MP	21fps	WDR	-	Binning
AV5355	5MP	14fps	-	-	Binning
AV10355	10MP	7fps	-	-	Binning

## Configurations



## Options

PM	Wide Angle Lens w/ Remote Focus/Zoom, P-Iris, True Day/Night
PMT	Telephoto Lens w/ Remote Focus/Zoom, P-Iris, True Day/Night
IR	IR LEDs
-S	SDHC Card Slot, HTTPS‡
-A	Audio
-H	Heater (Non-WDR and Non-STELLAR™ Models Only)

Note: Not all options available on all models.


## Model Numbers

1.2MP	AV1355PM-S	STELLAR
	AV1355PMIR-S	STELLAR
1080p	AV2355PMIR-SAH	Audio
	AV2355PMIR-SH	
	AV2355PMTIR-SH	
	AV2356PMIR-S	WDR
	AV2356PMTIR-S	WDR
3MP	AV3355PMIR-SH	
	AV3355PMTIR-SH	
	AV3356PMIR-S	WDR
	AV3356PMIR-SA	Audio WDR
	AV3356PMTIR-S	WDR
5MP	AV5355PMIR-SAH	Audio
	AV5355PMIR-SH	
	AV5355PMTIR-SH	
10MP	AV10355PMIR-SH	Dual Mode
	AV10355PMTIR-SH	Dual Mode

## Accessories (Sold Separately)

AV-CRMA	Corner Mount Adapter
AV-FMA	Flush Mount Adapter
AV-JBA	Standard Junction Box
AV-PMA	Pole Mount Adapter
AV-PMJB	Pendant Mount with Junction Box <i>(Fits Cap 1.5" NPT, Box Fits 3/4" NPT)</i>
AV-WMJB	Wall Mount Bracket with Junction Box <i>(Fits Cap 1.5" NPT, Box Fits 3/4" NPT)</i>
MD-2HK	Heater Kit
MD-CAP	Mounting Cap for MegaDome Series and SurroundVideo® G5 Mini
MD-JBA	Junction Box for MegaDome Series and SurroundVideo G5 Mini

## Create Your Model (Example: AV10355PMTIR-SH)

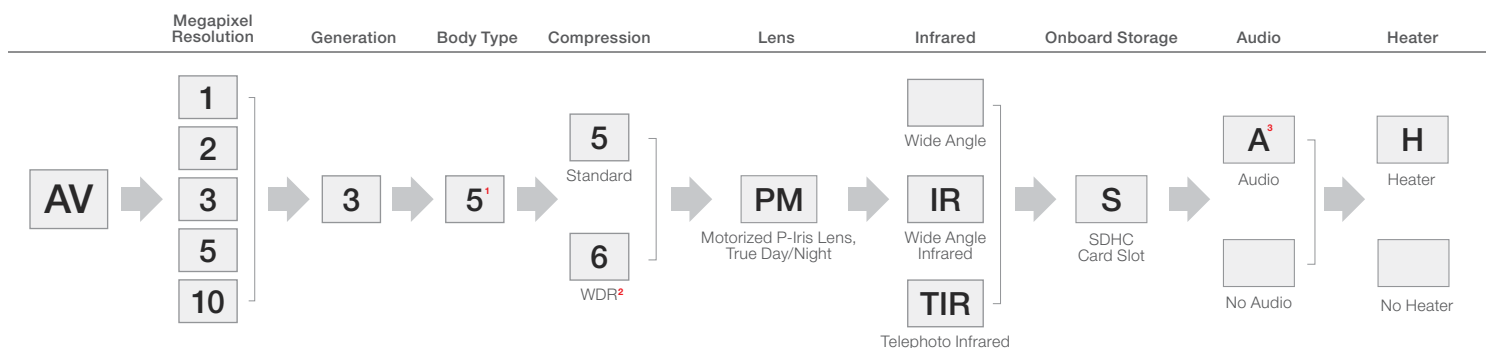

<sup>1</sup> "5" represents MegaDome G3 product line

<sup>2</sup> WDR for AV2356 and AV3356 models only

<sup>3</sup> Wide angle lens cameras only

† Maximum with H.264 compression

‡ HTTPS cannot be used with STELLAR™ or audio functionality