


## COVERT CAMERA

## MONOCHROME

# SD-500/A


- Side viewing high resolution monochrome smoke detector

View from below

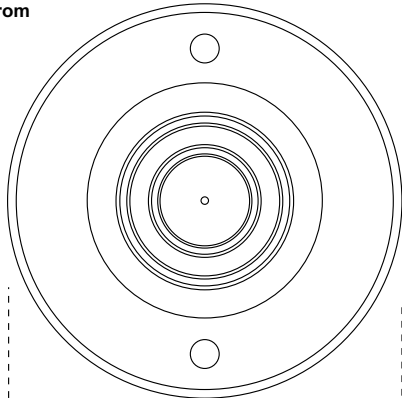

163mm

51mm

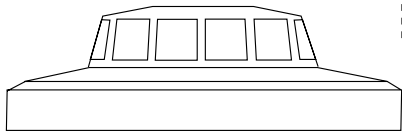

Side view

163mm (Diam) x 51mm (D) 155g



1/3" CCD



560 TV lines



0.2 lux sensitivity



Supply voltage: 12 Vdc



Audio output: 1V p-p

### Lens options

Lens	Product Code
4.0mm	SD-500/A
2.5mm	SD-500/A/2.5
6.0mm	SD-500/A/6.0
8.0mm	SD-500/A/8.0
12.0mm	SD-500/A/12.0

All lens options are the same price

- Unique custom-designed housing enables unhindered side-viewing operation
- Camera completely concealed behind unique one-way viewing mesh on manually adjustable 'swivel and tilt' cradle to enable exact camera positioning
- Housings can conceal up to 5 cameras - 4 side-viewing plus 1 vertical-viewing, enabling a whole room to be viewed from one unit

See Also:



SD-300/A  
Standard  
resolution  
monochrome  
option



SD-504/A  
Multi-directional  
4 camera option



SD-600/A  
Colour option

SPECIFICATION		MOD-507 camera module	
VIDEO	Image sensor	1/3" CCD sensor, 725 (H) x 582 (V) pixels	
	Horizontal resolution	560 TV lines or greater	
	Lens options	SEE TABLE	
	Electronic shutter	Automatic linear shutter	
	Sensitivity	0.2 lux	
	Video output	CCIR, 1Vp-p, 75 Ohms	
	Supply voltage	12 Vdc ± 10%	
	Working temperature	-10°C to +50°C	
	AUDIO	Microphone	Omni-directional electret
		Audio output	1Vp-p, 600 Ohms
Audio bandwidth		100Hz - 10KHz, +/- 3dB	