

# HD Micro Dome Cameras



HD MICRO DOME  
CAMERAS

Avigilon offers a broad range of high definition cameras – from 1 – 5 MP and 4 – 7K (based on horizontal resolution) – and are available in a variety of formats, including dome, panoramic and fixed. Whether it's a small storefront that requires a few cameras or a large complex system requiring complete coverage of numerous areas, you can trust that you're getting an exceptional solution for your security needs.

The innovative HD Micro Dome cameras are just one way Avigilon can help provide the very best monitoring and protection.



The HD Micro Dome cameras are the industry's smallest high-definition dome cameras, enabling a cost-effective transition into HD video surveillance and all the advantages of the Avigilon Control Center software. Available in surface, in-ceiling, and pendant mount form factors, the HD Micro Dome cameras truly deliver a versatile solution for monitoring activities in a variety of environments including indoor or outdoor building entrances and hallways. An ideal solution for applications in retail, hospitality, financial & banking and commercial.

## KEY FEATURES

Progressive scan CMOS sensor
Unsurpassed image quality
30 images per second at full resolution
Three versatile form factors for quick and easy installation
Factory focused for quick and easy installation
86° horizontal angle of view allows for full room coverage from any corner
H.264 and Motion JPEG compression
ONVIF API Compliance with version 1.02, 2.00 and Profile S
Surface variant ready for all environments with IP66 weather rating
Power over Ethernet


# Specifications

HD MICRO DOME CAMERAS


		IN-CEILING	SURFACE	PENDANT							
<b>IMAGE PERFORMANCE</b>	Image Sensor	1/3.6" progressive scan CMOS									
	Active Pixels	1.0 MP: 1280 (H) x 720 (V)		2.0 MP: 1920 (H) x 1080 (V)							
	Imaging Area	4.22 mm (H) x 2.38 mm (V); 0.166" (H) x 0.094" (V)									
	Minimum Illumination	0.6 lux (F2.0) in color mode									
	Dynamic Range	72.4 dB									
	Image Rate	30 (all resolutions)									
<b>LENS</b>	Lens	2.8 mm, F2.0									
	Angle of View	86°									
<b>IMAGE CONTROL</b>	Image Compression Method	H.264 (MPEG-4 Part 10/AVC), Motion JPEG									
	Motion Detection	Selectable sensitivity and threshold									
	Electronic Shutter Control	Automatic, Manual (1/8 to 1/8000 sec)									
	Flicker Control	50 Hz, 60 Hz									
	White Balance	Automatic, Manual									
	Backlight Compensation	Adjustable									
	Privacy Zones	Up to 64 zones									
<b>NETWORK</b>	Network	100BASE-TX									
	Cabling Type	CAT5									
	Connector	RJ-45									
	API	ONVIF compliance version 1.02, 2.00, Profile S ( <a href="http://www.onvif.org">www.onvif.org</a> )									
	Security	Password protection, HTTPS encryption, digest authentication, WS authentication, user access log, 802.1x port based authentication.									
	Protocol	IPv4, HTTP, HTTPS, SOAP, DNS, NTP, RTSP, RTCP, RTP, TCP/UDP, IGMP, ICMP, DHCP, Zeroconf, ARP RTP/UDP									
	Streaming Protocol	RTP/UDP multicast, RTP/RTSP/TCP, RTP/RTSP/HTTP/TCP, RTP/RTSP/HTTPS/TCP, HTTP									
<b>MECHANICAL</b>	Dimensions (ØxH)	91.00 mm x 107.54 mm; 3.58" x 4.23"	376 mm x 51 mm; 1.48" x 2.01"	77.20 mm x 153.80 mm; 3.03" x 6.06"							
	Weight	150 g (5.29 oz) + 36 g (1.27 oz) for cable	34 g (1.19 oz) + 36 g (1.27 oz) for cable	466 g (16.44 oz) + 58 g (2.05 oz) for adapter							
	Body	Plastic		Aluminum							
	Housing	Recessed mount	Surface mount, tamper resistant	Pendant mount, vandal resistant, Includes a 1.5 inch NPT male adapter and a 3/4 inch NPT female adapter							
	Finish	Plastic, RAL 9003 (RAL 9005 for -BL model)	Plastic, RAL 9003	Powder coat, RAL 9003 (RAL 9005 for -BL model)							
	Adjustment Range	360° pan, 90° tilt, 360° azimuth	± 40° pan, ± 40° tilt, 120° azimuth	360° pan, 90° tilt, 360° azimuth							
<b>ELECTRICAL</b>	Power Consumption	4 W max.									
	Power Source	PoE: IEEE802.3af Class 1 compliant									
<b>ENVIRONMENTAL</b>	Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)									
	Storage Temperature	-30 °C to +70 °C (-22 °F to 158 °F)									
	Humidity	0 - 95% non-condensing									
<b>CERTIFICATIONS</b>		<b>IN CEILING</b>		<b>SURFACE</b>			<b>PENDANT</b>				
	Certifications	UL	cUL	KC	CE	ROHS	WEEE	KC	RCM	EAC	KC
	Safety	UL 60950-1			CSA 60950-1			IEC/EN 60950-1			
	Environmental				Meets IP66 Weather Rating (Camera Only)			Meets IP55 Weather Rating IK10 Impact Rating			
	Electromagnetic Emissions	FCC Part 15 Subpart B Class B			IC ICES 003 Class B			EN 55032 Class B			
Electromagnetic Immunity	EN 55024			EN 61000-6-1							
<b>ORDERING INFORMATION</b>	1.0-H3M-DC1	1.0 Megapixel H.264 HD 2.8 mm In-Ceiling Micro Dome Camera									
	1.0-H3M-DC1-BL	1.0 Megapixel H.264 HD 2.8 mm In-Ceiling Micro Dome Camera - Black									
	1.0-H3M-DO1	1.0 Megapixel H.264 HD 2.8 mm Surface Micro Dome Camera									
	1.0-H3M-DP1	1.0 Megapixel H.264 HD 2.8 mm Pendant Micro Dome Camera									
	1.0-H3M-DP1-BL	1.0 Megapixel H.264 HD 2.8 mm Pendant Micro Dome Camera - Black									
	2.0-H3M-DC1	2.0 Megapixel H.264 HD 2.8 mm In-Ceiling Micro Dome Camera									
	2.0-H3M-DC1-BL	2.0 Megapixel H.264 HD 2.8 mm In-Ceiling Micro Dome Camera - Black									
	2.0-H3M-DO1	2.0 Megapixel H.264 HD 2.8 mm Surface Micro Dome Camera									
	2.0-H3M-DP1	2.0 Megapixel H.264 HD 2.8 mm Pendant Micro Dome Camera									
	2.0-H3M-DP1-BL	2.0 Megapixel H.264 HD 2.8 mm Pendant Micro Dome Camera - Black									

# Outline Dimensions

## In-Ceiling

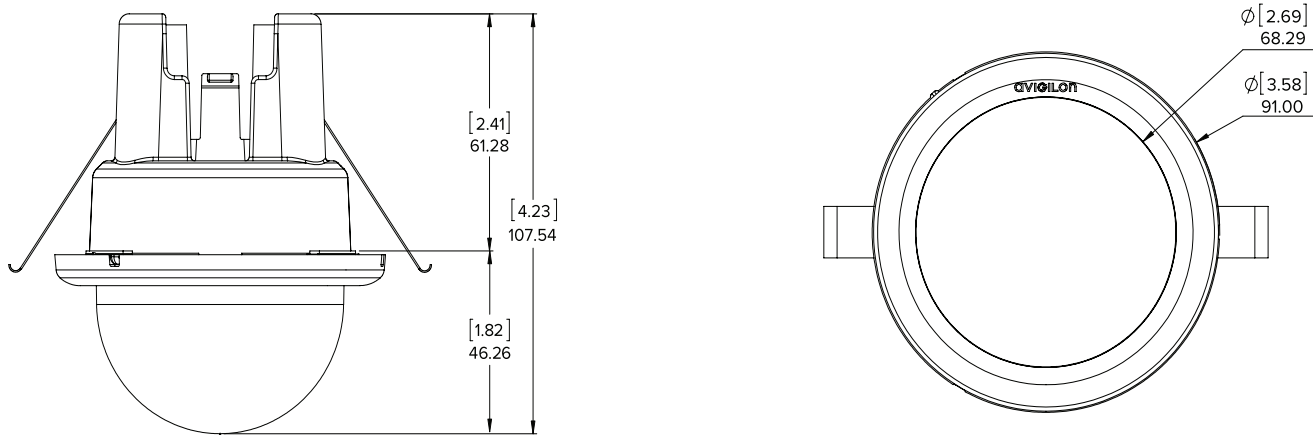

## Surface

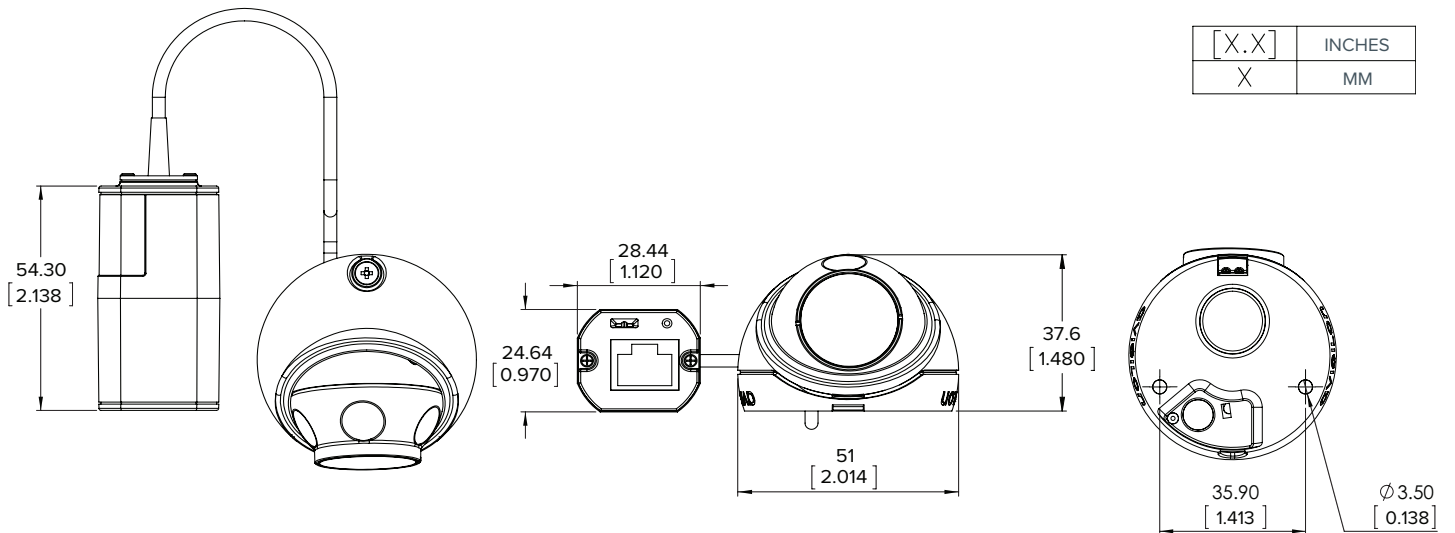

## Pendant

