

Basler IP Camera Accessories

Aigis HS9480 Housing



- Very small size
- PoE housing
- Indoor or outdoor installation
- IP65 rated protection



Specifications


Aigis HS9480 Housing

	Aigis HS9480
Temperature Range	-10° to 45°C (14° to 113°F)
Power	PoE
Weight	~ 1.4 kg (3 lb)
Dimensions	See drawings
Supported Cameras	BIP2-640c, BIP2-640c-dn, BIP2-1000c, BIP2-1000c-dn, BIP2-1300c, BIP2-1300c-dn, BIP2-1600c, BIP2-1600c-dn, BIP2-1280c, BIP2-1280c-dn, BIP2-1920c, BIP2-1920c-dn, BIP2-2500c, BIP2-2500c-dn
Mounts	Wall mount, pole mount
Protection Rating	IP65
Approvals	CE, UL, cUL
Accessories Included	Sunshield, mount
Order Numbers	2000030960 (with wall mount) 2000030765 (with pole mount)

Specifications are subject to change without prior notice

The HS9480 indoor/outdoor housing offers a smooth, sleek look that complements any environment. For quick installation or service, simply remove the two captive screws and slide off the cover to fully expose the camera and lens. This allows access to all camera and lens controls when the camera is in its mounted position. PoE cabling can be routed through watertight fittings in the bottom rear of the housing or can be routed through the mounting base. No heater or fan is needed inside the housing to maintain the camera within the specified temperature range!

Dimensions

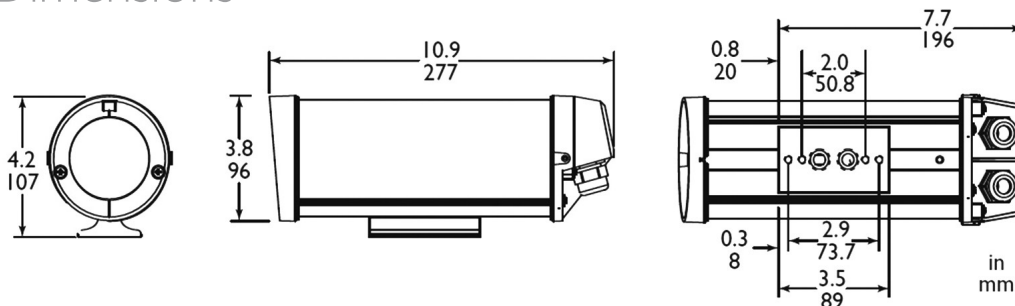

www.basler-ipcam.com

Germany, Headquarters
 Phone +49 4102 463 500
 Fax +49 4102 463 599
bc.sales.europe@baslerweb.com

USA
 Phone +1 610 280 0171
 Fax +1 610 280 7608
bc.sales.usa@baslerweb.com

Singapore
 Phone +65 6425 0472
 Fax +65 6425 0473
ip.sales.asia@baslerweb.com

Japan
 Phone +81 45 227 6210
 Fax +81 45 227 6220
ip.sales.asia@baslerweb.com

Korea
 Phone +82 707 1363 114
 Fax +82 707 0162 705
ip.sales.asia@baslerweb.com

Taiwan
 Phone +886 3 558 3955
 Fax +886 3 558 3956
ip.sales.asia@baslerweb.com



click. see. smile!