


BC1009AVAWDIRSA

Pixim Seawolf WDR Infrared Vandal Proof Dome Camera



Features:

- 1/3" DPS Digital Pixel System
- 690 H TVL, Minimum Illumination
- WDR max. 120dB
- 3D DNR/Motion Detection
- OSD
- IP 66 Weather-proof housing
- Digital Zoom / Flickerless Control
- Dual voltage (DC12V/AC24V)



Powered by
PIXIM
SEAWOLF

3D-DNR

Conventional Camera vs Pixim




Vertical Smear

Conventional Camera vs Pixim



WDR

Conventional Camera vs Pixim

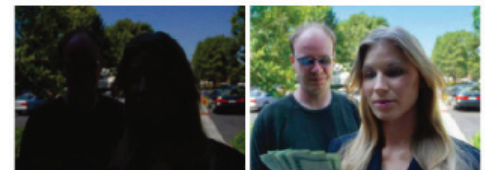

Specification:

Model Number	BC1009AVAWDIRSA
Imaging Sensor	1/3" DPS Digital Pixel System
Effective Pixel	768(H) x 548(V)
Signal System	NTSC
DSP	Pixim Seawolf
Video Output	1.0 Vp-p, 75 ohm
Resolution	690TVL
Minimum Illumination	0 lux IR On
OSD	English
Functions	BLC, AGC, WDR, AWB, Mirror, Privacy Zone, Motion Detection, 3D-DNR
Housing	IP 66, Vandal Proof
Operating Temperature	-14°F ~ 120°F
Operating Humidity	20%-80%
Power Voltage	12VDC/24VAC
Dimension	6" (W) x 5" (H)

For more information or technical support, please call (909) 305-8889 or log on to www.bolideco.com

468 South San Dimas Avenue, San Dimas CA 91773 | Tel: (909) 305-8889 Fax: (909) 305-0999

Bolide Technology Group makes no representation concerning the legality of certain product application. We encourage you to check and comply with all applicable local state, and federal laws. Specification and availability are subject to change without notice. All trademarks, registered trademarks, and names are the property of their respective owners.