


BP0033C

500ft White Superior Grade Zip Cable



Features:

- UL Listed
- Bare Copper Center Conductor
- CCA (Copper Clad Aluminum) Shield
- Available in White, 500ft
- Sparker Tested: 4000V
- Characteristic Impedance: 75±3 Ohm

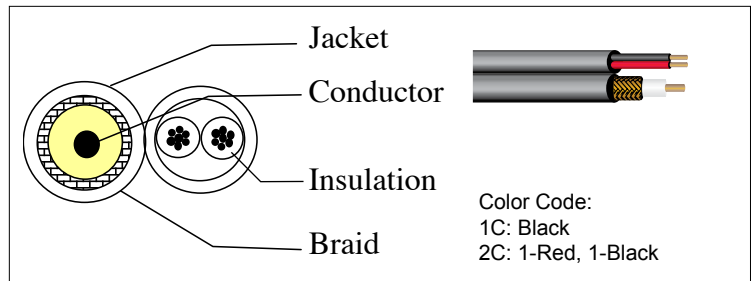

Specification:

Center Conductor:	
Material:	Solid Copper, 20 AWG
Shield:	
Material:	Copper Clad Aluminum
Braid Coverage:	95% Maximum Braid
Attached 18-2:	
Conductors:	2 conductors
Type:	Stranded
Material:	Copper clad aluminum, 18AWG 7 x 0.01516" (0.385mm)
Electrical Characteristics:	
Impedance:	75+/-3Ω
Capacitance:	17+/-3 pF/ft
Spark Test:	4,000VAC
Dielectric Strength:	3,000VAC
Temperature Rating:	167°F (75°C)
Return Loss:	-20 dB Max (50-1,000 MHz)

For more information or technical support, please call (909) 305-8889 or log on to www.bolideco.com

468 South San Dimas Avenue, San Dimas CA 91773 | Tel: (909) 305-8889 Fax: (909) 305-0999

Bolide Technology Group makes no representation concerning the legality of certain product application. We encourage you to check and comply with all applicable local state, and federal laws. Specification and availability are subject to change without notice. All trademarks, registered trademarks, and names are the property of their respective owners.