


BP0033CW1000-e

1000ft White Professional Grade RG59 Zip Cable



Features:

- CCS (Copper-clad steel)
- Available in Black/White, 500ft
- Sparker Tested: 4000V
- Characteristic Impedance: 75±3 Ohm

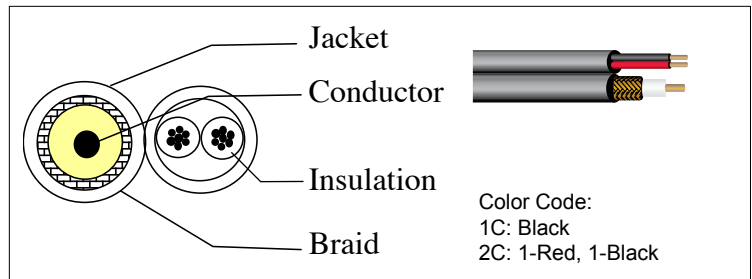

Frequency	Atten. (+/- 5%)	Frequency	Atten. (+/- 5%)
5 MHz	1.90	400 MHz	13.61
50 MHz	5.00	600 MHz	16.73
100 MHz	7.02	800 MHz	19.20
200 MHz	9.73	860 MHz	19.95
230 MHz	10.38	1000 MHz	21.50

Specification:

Center Conductor:	
Material:	CCS, 20 AWG
Shield:	
Material:	Copper Clad Steel
Braid Coverage:	95% Maximum Braid
Attached 18-2:	
Conductors:	2 conductors
Type:	Stranded
Material:	CCS, 18AWG 7 x 0.01516" (0.385mm)
Electrical Characteristics:	
Impedance:	75±3Ω
Capacitance:	53.2 pF/m +/- 2
Velocity ratio	83%
Spark Test:	4,000VAC
Dielectric Strength:	3,000VAC
Temperature Rating:	167°F (75°C)

For more information or technical support, please call (909) 305-8889 or log on to www.bolideco.com

468 South San Dimas Avenue, San Dimas CA 91773 | Tel: (909) 305-8889 Fax: (909) 305-0999

Bolide Technology Group makes no representation concerning the legality of certain product application. We encourage you to check and comply with all applicable local state, and federal laws. Specification and availability are subject to change without notice. All trademarks, registered trademarks, and names are the property of their respective owners.