



**BOSCH**  
Invented for life

# DS860 Series TriTech PIR and Microwave Detector



- ▶ Artificial Intelligence
- ▶ Five layers of detection including look-down zone
- ▶ Supervised microwave and PIR
- ▶ Selectable PIR sensitivity
- ▶ Draft/insect immunity
- ▶ Five mounting options
- ▶ Two coverage patterns
- ▶ Vertical and horizontal pointability

The DS860 Series TriTech® Detectors with their passive infrared and microwave processing provide excellent catch performance with freedom from false alarms. These surface or corner mount detectors are available with three different microwave frequencies:

Model	Microwave Frequency
DS860	10.525 GHz
DS860-A	10.687 GHz
DS860-B	9.9 GHz

## Functions

### Signal Processing

Uses passive infrared and microwave technologies to provide an alarm condition when both fields of protection are simultaneously activated. Alarm signals must meet the signaling requirements of both technologies to activate an alarm.

### Adjustable PIR and Microwave Sensitivity

- **PIR Signal Processing:** Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration and polarity of signals to make an alarm decision. Will not alarm on extreme levels of thermal and illumination disturbances caused by heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. Two sensitivity settings are provided.
- **Microwave Signal Processing:** Pattern recognition circuitry identifies and ignores repetitive false alarm sources. Adaptive processing adjusts to background disturbances. This helps to reduce false alarms while maintaining catch performance.

### Test Features

Externally visible alarm LED flashes to indicate a trouble condition.

### Supervised Microwave and PIR

Patented fully supervised microwave and PIR circuitry provides single technology coverage in the event the microwave subsystem fails. Use the memory circuit to force a self-test at anytime.


### Draft and Insect Immunity

The sealed optical chamber provides immunity to drafts and insects.

**Certifications and Approvals**

**All Models** UL639, Intrusion Detection Units  
 ULC: S306-M89  
 CE  
 FCC Compliant  
**DS860-A** Complies with EN50131-1 grade 2

**Installation/Configuration Notes**

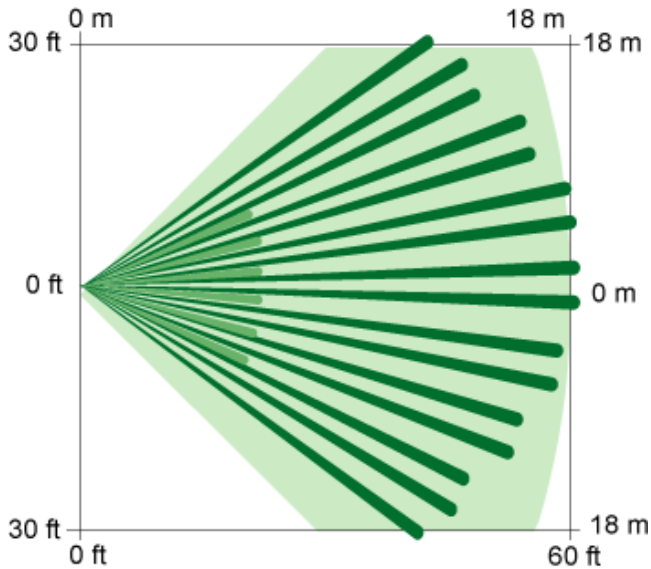

**Top View**  
*Standard Broad Coverage: 18.3 m x 18.3 m (60 ft x 60 ft)*



**Side View**  
*Standard Broad Coverage: 18.3 m x 18.3 m (60 ft x 60 ft)*



**Top View**  
*Optional Long Range Coverage: 30.5 m x 3 m (100 ft x 10 ft)*  
 Requires optional ORL92-3 lens.



**Side View**  
*Optional Long Range Coverage: 30.5 m x 3 m (100 ft x 10 ft)*  
 Requires optional ORL92-3 lens.

**Mounting**

The recommended mounting height is 2.3 m (7.5 ft).  
 Mounts to a standard single gang electrical box.

## Technical Specifications

### Enclosure Design

Dimensions: 12.7 cm x 7.1 cm x 5.6 cm  
(5 in. X 2.8 in. X 2.2 in.)

Material: High impact ABS plastic enclosure.

### Environmental Considerations

Operating Temperature: -40°C to +49°C (-40°F to +120°F)  
*For UL Certified installations, 0°C to +49°C (+32°F to +120°F)*

Radio Frequency Interference (RFI) immunity: No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.

DS860-A: Complies with Environmental Class II (EN50130-5)

### Mounting

Height Range: 1.8 m to 2.4 m (6 ft to 8 ft)

Location: Surface or corner mount

### Outputs

Alarm: Normally-closed reed relay rated at 3.0 W, 125 mA at 28 VDC for resistive loads and protected by a 4.7 Ω resistor in the common C leg.

Tamper: Normally-closed tamper switch. Contacts rated at 28 VDC, 125 mA maximum.

### Power Requirements

Current Draw: 16 mA at 12 VDC

Voltage: 9 VDC to 15 VDC

### Trademarks

TriTech® is a registered trademark of Bosch Security Systems in the United States.

## Ordering Information

DS860 Detector (10.525 GHz) DS860

Operates at 10.525 GHz. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

DS860-AUS Detector (10.525 GHz) DS860-AUS

Operates at 10.525 GHz. For use in Australia. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

## Ordering Information

DS860-CHI Detector (10.525 GHz) DS860-CHI

Operates at 10.525 GHz. For use in China. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

DS860-A Detector (10.687 GHz) DS860-A

Operates at 10.687 GHz. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

DS860-B Detector (9.9 GHz) DS860-B

Operates at 9.9 GHz. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

DS860B-FRA Detector (9.9 GHz) DS860B-FRA

Operates at 9.9 GHz. For use in France. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

DS860B-ITA Detector (9.9 GHz) DS860B-ITA

Operates at 9.9 GHz. For use in France. Provides five layers of detection, supervised microwave and PIR. selectable sensitivity, draft and insect immunity, five mounting options, and two coverage patterns.

### Accessories

B328 Gimbal-mount Bracket B328

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

B335-3 Low-profile Swivel-mount Bracket B335-3

Plastic, swivel, low profile bracket for walls. The vertical pivot range is +10° to -20°; the horizontal pivot range is ±25°. Shipped in packages of three.

B800 Ceiling-mount Bracket B800

Surface mounts detectors to the ceiling. The vertical pivot range is +7° to -16°; the horizontal pivot range is ±45°. Do not use for pet applications.

OLR92-3 Long-range Lens OLR92-3

Provides long-range coverage with a 30.5 m x 3 m (100 ft x 10 ft) pattern. Shipped in packages of three.

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

### Represented by