



Video Recorder 600 Series



- ▶ **8/16-Channel real-time H.264 recording**
- ▶ **View and record video in CIF, 2CIF, or 4CIF/D1 resolution**
- ▶ **Supports VGA 16:9, 16:10 and 4:3 aspect ratios in various resolutions**
- ▶ **Control Center software for simplified management of remote recorders**
- ▶ **Built-in web viewer for remote viewing, playback, control, and configuration**
- ▶ **Live display support on mobile devices**
- ▶ **Smart Search**
- ▶ **Bosch and third-party Pan/Tilt/Zoom camera control**

The Bosch Video Recorder 600 Series is an 8/16 channel digital recorder that uses the latest H.264 compression technology. With the supplied Control Center software and built-in web server, the 600 Series is a fully integrated, stand-alone video management solution that's ready to go, straight out of the box.

Available with a variety of storage capacities, the 600 Series features a highly reliable embedded design that minimizes maintenance and reduces operational costs. The recorder is also available with a built-in DVD writer.

System Overview

The 600 Series takes advantage of the latest H.264 video compression technology to dramatically reduce the amount of storage and bandwidth needed while still producing a better image quality. The 600 Series records multiple video and audio signals while simultaneously providing live multi-screen viewing and playback. Comprehensive search and playback functions provide quick recall and viewing of recorded video.

Recording

Ease of use is a key feature of the 600 Series design. Simply connect the cameras, apply power, and the unit begins recording automatically. All recording takes place in the background with no operator intervention required.

The use of H.264 compression reduces the file size of recordings by as much as 30% compared to standard MPEG-4, without sacrificing image quality. The 600 Series can record at up to 25 (PAL) / 30 (NTSC) images per second, per channel at CIF resolution. Recording at 2CIF and 4CIF resolution is also possible by reducing the recording image rate settings. The recording rate and quality are individually configurable per channel for maximum flexibility.

If required, alarm recordings (input and motion) and continuous recordings can be split over two partitions. An overwrite mode can then be selected separately for each partition.

Dome Control

The 600 Series can control pan/tilt/zoom (PTZ) equipment via RS-485 serial communications. PTZ devices, including the Bosch AutoDome Modular and AutoDome Easy II and a number of third party domes, are supported.

Alarms

All models have extensive alarm handling functions and telemetry control. Alarm functions include motion detection in user-definable areas of the image on any camera input.

Local control and operation

The unit can be easily operated and programmed via the on-screen display menu system using the front panel control keys, the mouse, an IntuiKey keyboard or the supplied remote control. Two monitor outputs provide full-screen, quad, multi-screen and sequenced viewing.

Looping auto-terminating video inputs and outputs, audio inputs and output, and alarm inputs and outputs are located on the rear panel.

Two VGA connectors provide an output for monitor A (main monitor) and monitor B (spot monitor). Monitor A displays live and playback in full-screen, quad or multi-screen pictures that can be frozen and zoomed. Monitor B displays live full-screen, quad or multi-screen pictures.

Remote control and operation

Use the Control Center PC software or built-in web application via a network for live viewing, playback, and configuration. The Control Center can also be used with other Bosch products including the 400 Series and the 700 Series. Four users can control the 600 Series simultaneously.

The 600 Series includes an authenticity check for both local and remote playback, ensuring recording integrity. The 600 Series Archive Player is provided for playback of secure video files.

Mobile Devices

Real Time Streaming Protocol (RTSP) is supported in the 600 Series. This means that live video streamed from the unit over the internet can be displayed by suitably configured mobile devices.


Functions

The 600 Series has the following features:

- 8 or 16 looped-through, auto-terminating camera inputs
- 4 audio inputs and 2 audio outputs
- Simultaneous live viewing, recording, playback, and remote streaming
- 10/100Base-T Ethernet port for local or wide area network connection
- RS485 serial port for serial communication to control movable cameras
- IntuiKey keyboard support including loop-through to other 600 Series recorders
- VGA monitor outputs for main and spot monitors
- 16:9, 16:10 and 4:3 monitor aspect ratio displays for large-format monitor support
- Numerous VGA output quality settings
- Full-screen, quad and multi-screen display capabilities in live and playback modes
- Alarm picture pop-up on full-screen or sequence by multiple alarms simultaneously
- Playback one or more channels while showing live pictures of the other channels

- Spot monitor output with sequencing and full-screen, quad and multi-screen views
- Motion detection
- Multiple search modes including smart search (search for motion within recorded images)
- 8 or 16 switching (alarm) inputs and 4 alarm outputs
- Video loss detection
- Audible alarm
- Live display support on mobile devices
- Pan/tilt/zoom camera control via RS485
- Supports Bosch and Pelco protocols
- Local archiving via USB
- Local archiving via built-in DVD burner (specific models)

Installation/Configuration Notes

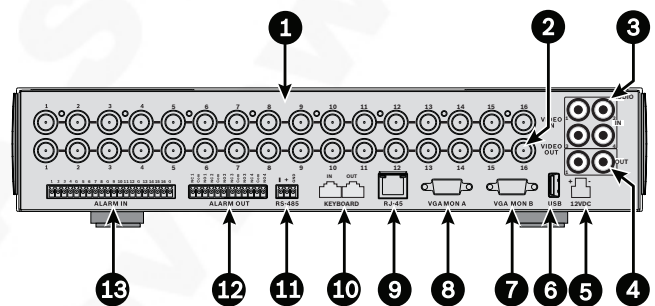

Connections on back of DVR 600 (16-channel version)

- | | |
|-------------------------|---|
| 1. Camera inputs | 8. Monitor A VGA output |
| 2. Camera outputs | 9. RJ45 network connector |
| 3. Audio output | 10. RJ11 connectors for IntuiKey keyboard |
| 4. Audio inputs | 11. RS485 connector for Dome control |
| 5. Power connector | 12. Alarm outputs |
| 6. USB connector | 13. Alarm inputs |
| 7. Monitor B VGA output | |

Recommended PC requirements for Web support

Operating system	Windows XP, Windows Vista or Windows 7
Web browser	Internet Explorer 7 or later
Processor	Intel Core Duo 2.0 GHz or comparable
RAM memory	2048 MB
Free disk space	10 MB
Graphics card	NVIDIA GeForce 8600 or better
Video memory	256 MB
Network interface	10/100-BaseT

Technical Specifications

Electrical

Rated Voltage and Power

External power adapter AC input 110–240 VAC; 50/60 Hz; 1.8 A

External power adapter DC output 12 VDC; 5 A

DVR Power input 12 VDC; 3.5 A; 145 BTU/h

Video Inputs

Inputs Composite video 1 Vpp, 75 ohm, automatic termination; PAL / NTSC auto-detect

AGC Automatic gain adjustment for each video input

Video outputs

Outputs Monitor A: VGA RGB
Monitor B: VGA RGB

Live Resolution (SVGA) 800x600 (4:3), 1024x768 (4:3)
1280x1024 (5:4)
1366x768 (16:9)
1440x900 (16:10)

Digital Zoom 2 times

Streaming video H.264 compression

Audio

Inputs Mono RCA, 1.0 Vpp

Output Mono RCA, 1.0 Vpp

Compression ADPCM

Sample rate 16 kHz per channel

Bit rate 8-bit

Alarm Handling

Inputs 8 or 16 inputs configurable NO/NC, max. input voltage 15 VDC

Outputs 4 Relay outputs, configurable NO/NC, max. rated 30 VAC, 40 VDC 0.5 A continuous or 10 VA

Control

RS485 Output signals according to RS485, max. signal voltage -8 to +12 V

RS485 Support Bosch domes, and Pelco P and D

Connectors

Video Inputs 8 or 16 looping BNC, auto termination

Monitor 2 VGA D-SUB

Alarm connectors Screw terminal inputs, cable diameter AWG26-16 (0.13-1.5 mm)

Audio Inputs 4 RCA (CINCH)

Audio Output 2 RCA (CINCH)

Ethernet RJ45, 10/100 BaseT according to IEEE802.3

Connectors

RS485 Screw terminal output, cable diameter AWG28-16 (0.08-1.5 mm)

USB 2.0 One front and one rear USB connector for mouse or USB memory device

Storage

Hard Disks 2 SATA hard drive maximum 2TB each

Video recording

Record Rate (IPS)

NTSC Max. 30 IPS per channel, configurable: 30, 15, 7.5, 5, 3, 1

PAL Max. 25 IPS per channel, configurable: 25, 12.5, 6.25, 5, 2.5, 1

Recording Quality Best, High, Normal, Low, Lowest

Average Recording Capacity (16 channels, 500 GB)

CIF, Normal, 25/30 IPS PAL: 138 hours, NTSC: 170 hours

CIF, Normal, 6.25/7.5 IPS PAL: 350 hours, NTSC: 425 hours

2CIF, Normal, 12.5/15 IPS PAL: 115 hours, NTSC: 144 hours

4CIF, Normal, 6.25/7.5 IPS PAL: 93 hours, NTSC: 115 hours

Maximum recording rates per channel

Local 16 channels

4CIF PAL: 6 IPS, NTSC: 7.5 IPS

2CIF PAL: 12.5 IPS, NTSC: 15 IPS

CIF PAL: 25 IPS, NTSC: 30 IPS

Local 8 channels

4CIF PAL: 12.5 IPS, NTSC: 15 IPS

2CIF PAL: 25 IPS, NTSC: 30 IPS

CIF PAL: 25 IPS, NTSC: 30 IPS

Local 4 channels

4CIF PAL: 25 IPS, NTSC: 30 IPS

2CIF PAL: 25 IPS, NTSC: 30 IPS

CIF PAL: 25 IPS, NTSC: 30 IPS

Remote (network) 16 channels

CIF PAL: 6.75 IPS, NTSC: 7.5 IPS

Remote (network) 8 channels

CIF PAL: 12.5 IPS, NTSC: 15 IPS

Display Modes

Monitor A Full, quad, multi-screen (live and playback), full sequence, alarm call-up (live)

Monitor B Full, quad, multi-screen, full sequence, alarm call-up (live)

Recording Modes

Normal partition	Continuous recording (with or without overwriting)
Event partition	Input and motion recording (with or without overwriting)

Mechanical

Dimensions (WxDxH)	355 x 362 x 78 mm (13.9 x 14.2 x 3.1 in) excluding cabling
Weight	4.3 kg (9.46 lb) approx.

Environmental**Temperature**

- Operating	+0°C to +40°C (+32°F to +104°F)
- Storage	-40°C to +70°C (-40°F to +158°F)

Humidity

- Operating	<93% non-condensing
- Storage	<95% non-condensing

Electromagnetic compatibility**EMC requirements**

- USA	FCC Part 15, Class B
- EU	EMC Directive 2004/108/EC
	Immunity: EN50130-4
	Emission: EN55022 Class B
	Harmonics: EN61000-3-2
	Voltage fluctuations: EN61000-3-3

Safety

- USA	UL60950-1
- EU	LV Directive 2006/95/EC, EN60950-1
- Can.	CAN/CSA-C22.2 no. 60950-1
- Australia	C-Tick

Ordering Information

DVR-630-08A050 630 Series DVR 630 Series DVR, 8-channel, 500 GB	DVR-630-08A050
DVR-630-16A050 630 Series DVR 630 Series DVR, 16-channel, 500 GB	DVR-630-16A050
DVR-650-08A050 650 Series DVR 650 Series DVR, 8-channel, DVD writer, 500 GB	DVR-650-08A050
DVR-650-16A050 650 Series DVR 650 Series DVR, 16-channel, DVD writer, 500 GB	DVR-650-16A050

Ordering Information

DVR-630-08A100 630 Series DVR 630 Series DVR, 8-channel, 1 TB	DVR-630-08A100
DVR-630-16A100 630 Series DVR 630 Series DVR, 16-channel, 1 TB	DVR-630-16A100
DVR-650-08A100 650 Series DVR 650 Series DVR, 8-channel, DVD writer, 1 TB	DVR-650-08A100
DVR-650-16A100 650 Series DVR 650 Series DVR, 16-channel, DVD writer, 1 TB	DVR-650-16A100
DVR-630-08A200 630 Series DVR 630 Series DVR, 8-channel, 2 TB	DVR-630-08A200
DVR-630-16A200 630 Series DVR 630 Series DVR, 16-channel, 2 TB	DVR-630-16A200
DVR-650-08A200 650 Series DVR 650 Series DVR, 8-channel, DVD writer, 2 TB	DVR-650-08A200
DVR-650-16A200 650 Series DVR 650 Series DVR, 16-channel, DVD writer, 2 TB	DVR-650-16A200

Accessories

DVR-XS050-A Storage Expansion Kit DVR 600 Series storage expansion 500 GB	DVR-XS050-A
DVR-XS100-A Storage Expansion Kit DVR 600 Series storage expansion 1 TB	DVR-XS100-A
DVR-XS200-A Storage Expansion Kit DVR 600 Series storage expansion 2 TB	DVR-XS200-A

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com