

LTC 8560 Series Single-channel On-site Receiver/Drivers

www.boschsecurity.com



BOSCH

Invented for life



- ▶ Pan/Tilt/Zoom (PTZ) control
- ▶ Bi-Phase or RS-232 data input
- ▶ Compatible with Allegiant Systems
- ▶ Variety of input/output voltages
- ▶ Integral local test feature

The LTC 8560 Series, the LTC 8562 Series, and the LTC 8563/20 on-site receiver/drivers are control data decoder units and motor drivers for pan/tilt units and zoom lenses. These receiver/drivers are used in conjunction with Allegiant Series or microprocessor-based switcher/controller systems.

Functions

The receiver/driver decodes Allegiant Bi-Phase control data from the switcher/controller system through the LTC 8568 Series Signal Distribution Unit into specific control codes. In addition, the receiver/driver accepts RS-232 control code data generated by the LTC 8780 Data Converter Unit.


These receiver/drivers are available in a variety of input and output voltage configurations. All units are 50/60 Hz line frequency compatible. All units have low voltage DC lens drivers (6 V or 12 V, selectable) for focus, zoom, and iris with adjustable speed. Auxiliary supply terminals provide power which is fuse-protected at the voltage of the pan/tilt output. Additional features include a full operating temperature range, an integral local test function, a unique dither feature, polarity reversible lens drive,

convenient thumbwheel selectable camera addressing, and a NEMA-4X, IP66 rated environmental enclosure with lockable latches.

Certifications and approvals

EMC Requirements	CE Immunity, CE Emission Class B, FCC Class B, ICES-003
Safety	CE, UL, cUL

Installation/configuration notes

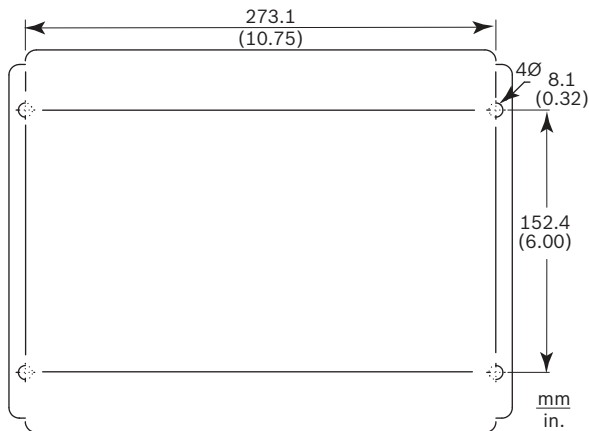

Mounting Hole Pattern

Technical specifications

Electrical

Pan/Tilt Output	Four (4) function pan/tilt solid state drive with zero crossing turn-on; 1.0 A drive capability
Lens Output	
For Zoom, Focus, and Motorized Iris	6 VDC or 12 VDC, 100 mA maximum
Variable Speed 6 VDC Setting	4 VDC to 8 VDC
Variable Speed 12 VDC Setting	8 VDC to 16 VDC

Mechanical

Size (W x D x H)	295 x 241 x 165 mm (11.6 x 9.5 x 6.5 in.)
Weight	6.8 kg (15 lb)

Environmental

Temperature	
• Operating	-40°C to 60°C (-40°F to 140°F)
• Storage	-40°C to 70°C (-40°F to 158°F)
Humidity	0% to 95% relative, non-condensing
Vibration	3 g swept sine wave, 15 Hz to 2000 Hz
Shock	50 g, 11 ms, ½ sine
Enclosure Protection	NEMA-4X, IP66

Ordering information

LTC 8560/50 Single-channel On-site Receiver/Driver
230 VAC pan/tilt voltage, 230 VAC power supply, no auxiliary, 50°Hz
Order number **LTC 8560/50**

LTC 8560/60 Single-channel On-site Receiver/Driver
120 VAC pan/tilt voltage, 120°VAC power supply, no auxiliary, 50/60 Hz
Order number **LTC 8560/60**

LTC 8562/50 Single-channel On-site Receiver/Driver
24 VAC pan/tilt voltage, 230 VAC power supply, no auxiliary, 50 Hz
Order number **LTC 8562/50**

LTC 8562/60 Single-channel On-site Receiver/Driver
24 VAC pan/tilt voltage, 120 VAC power supply, no auxiliary, 50/60 Hz
Order number **LTC 8562/60**

LTC 8563/20 Single-channel On-site Receiver/Driver
24 VAC pan/tilt voltage, 24 VAC power supply, no auxiliary, 50/60°Hz
Order number **LTC 8563/20**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com