


BOSCH

Invented for life

LTC 8560 Series Single-channel On-site Receiver/Drivers



- ▶ **Pan/Tilt/Zoom (PTZ) control**
- ▶ **Bi-Phase or RS-232 data input**
- ▶ **Compatible with Allegiant Systems**
- ▶ **Variety of input/output voltages**
- ▶ **Integral local test feature**
- ▶ **Indoor/outdoor applications**

The LTC 8560 Series, the LTC 8562 Series, and the LTC 8563/20 on-site receiver/drivers are control data decoder units and motor drivers for pan/tilt units and zoom lenses. These receiver/drivers are used in conjunction with Allegiant Series or microprocessor-based switcher/controller systems.

Functions

The receiver/driver decodes Allegiant Bi-Phase control data from the switcher/controller system through the LTC 8568 Series Signal Distribution Unit into specific control codes. In addition, the receiver/driver accepts RS-232 control code data generated by the LTC 8780 Data Converter Unit.


These receiver/drivers are available in a variety of input and output voltage configurations. All units are 50/60 Hz line frequency compatible. All units have low voltage DC lens drivers (6 V or 12 V, selectable) for focus, zoom, and iris with adjustable speed. Auxiliary supply terminals provide power which is fuse-protected at the voltage of the pan/tilt output.

Additional features include a full operating temperature range, an integral local test function, a unique dither feature, polarity reversible lens drive, convenient thumbwheel selectable camera addressing, and a NEMA-4X, IP66 rated environmental enclosure with lockable latches.

Certifications and Approvals

EMC Requirements	CE Immunity, CE Emission Class B, FCC Class B, ICES-003
Safety	CE, UL, cUL

Installation/Configuration Notes

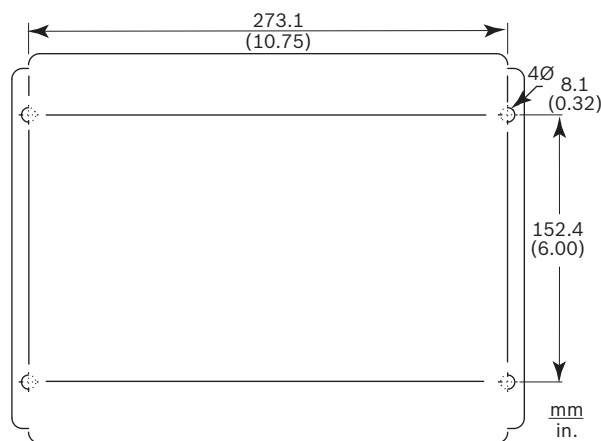

Mounting Hole Pattern

Technical Specifications**Electrical**

Pan/Tilt Output	Four (4) function pan/tilt solid state drive with zero crossing turn-on; 1.0 A drive capability
-----------------	---

Lens Output

For Zoom, Focus, and Motorized Iris	6 VDC or 12 VDC, 100 mA maximum
Variable Speed 6 VDC Setting	4 VDC to 8 VDC
Variable Speed 12 VDC Setting	8 VDC to 16 VDC

Mechanical

Size (W x D x H)	295 x 241 x 165 mm (11.6 x 9.5 x 6.5 in.)
Weight	6.8 kg (15 lb)

Environmental**Temperature**

- Operating –40°C to 60°C (–40°F to 140°F)
- Storage –40°C to 70°C (–40°F to 158°F)

Humidity	0% to 95% relative, non-condensing
Vibration	3 g swept sine wave, 15 Hz to 2000 Hz
Shock	50 g, 11 ms, ½ sine
Enclosure Protection	NEMA-4X, IP66

Ordering Information**LTC 8560/50 Single-channel On-site Receiver/Driver** **LTC 8560/50**

230 VAC pan/tilt voltage, 230 VAC power supply, no auxiliary, 50°Hz

LTC 8560/60 Single-channel On-site Receiver/Driver **LTC 8560/60**

120 VAC pan/tilt voltage, 120°VAC power supply, no auxiliary, 50/60 Hz

LTC 8562/50 Single-channel On-site Receiver/Driver **LTC 8562/50**

24 VAC pan/tilt voltage, 230 VAC power supply, no auxiliary, 50 Hz

LTC 8562/60 Single-channel On-site Receiver/Driver **LTC 8562/60**

24 VAC pan/tilt voltage, 120 VAC power supply, no auxiliary, 50/60 Hz

LTC 8563/20 Single-channel On-site Receiver/Driver **LTC 8563/20**

24 VAC pan/tilt voltage, 24 VAC power supply, no auxiliary, 50/60°Hz

Ordering Information**LTC 8561/60 Single-channel On-site Receiver/Driver** **LTC 8561/60**

120 VAC pan/tilt voltage, 120 VAC power supply, with auxiliary, 50/60 Hz

LTC 8564/20 Single-channel On-site Receiver/Driver **LTC 8564/20**

24 VAC pan/tilt voltage, 24 VAC power supply, with auxiliary, 50/60 Hz

LTC 8566/50 Single-channel On-site Receiver/Driver **LTC 8566/50**

24 VAC pan/tilt voltage, 230 VAC power supply, with auxiliary, 50 Hz

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by