

**BOSCH**  
Invented for life

## LTC 9348/00 Series Indoor Housings




- ▶ For fixed camera installations
- ▶ Plenum ceiling applications
- ▶ Adjustable viewing direction
- ▶ Tamper resistant and dustproof
- ▶ Concealed camera position
- ▶ Tinted lower dome
- ▶ Attractive design
- ▶ Easy installation

This attractive domed housing accommodates 1/2-inch and 1/3-inch solid-state cameras for surveillance in a variety of indoor CCTV applications. The LTC 9348/00 has a 216 mm (8.5 in) lower tinted dome, with an opaque black non-viewing window area and white decorative trim ring. The above-ceiling portion is manufactured from heavy gauge steel, making it ideal for use in plenum ceiling applications. These housings can be mounted in both sheetrock and standard drop ceilings.

The units contain conduit knockouts and support holes for easy installation and service. They come complete with mounting hardware and an adjustable camera mounting head for 360° adjustable viewing direction. These totally enclosed units are dustproof and tamper resistant.

### Installation/Configuration Notes

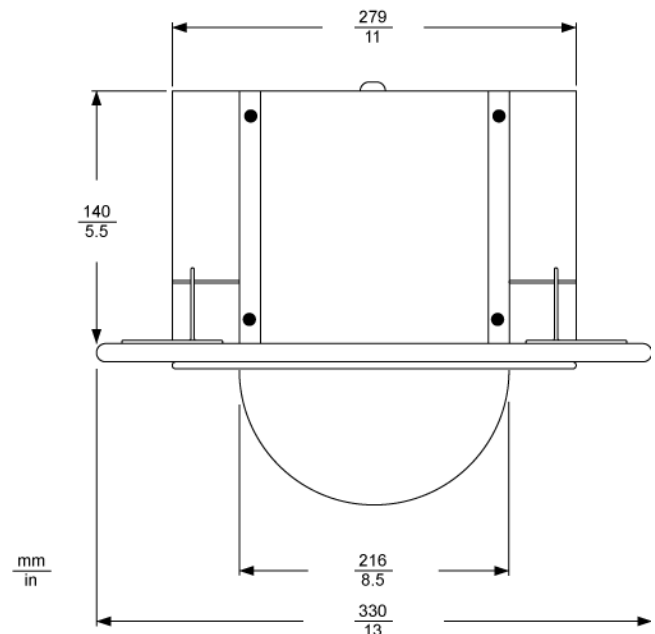

Dimensional Outline

## Parts Included

## Quantity Component

|   |                                   |
|---|-----------------------------------|
| 1 | LTC 9348/00 Series Indoor Housing |
|---|-----------------------------------|

## Technical Specifications

## Mechanical

|                     |                                                                                                                                                                                                                                                               |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction        | The back box is constructed from 20 and 18 gauge steel. The lower capsule is formed from 0.125 inch tinted cell cast acrylic with non-viewing window area opaque black and white trim ring. Light reduction due to the viewing area is only 1 to 1.5 f-stops. |
| Dimensions          | See Dimensional Outline                                                                                                                                                                                                                                       |
| Weight              | 3.1 kg (6.8 lb)                                                                                                                                                                                                                                               |
| Maximum Camera/Lens | 216 L x 89 W x 71 H mm<br>(8.5 x 3.5 x 2.8 inch)                                                                                                                                                                                                              |
| Enclosure Mounting  | Four (4) mounting flanges are provided in flange of dome (including toggle bolts).                                                                                                                                                                            |
| Camera Mounting     | Camera support bracket is adjustable forward and backward. Bracket is included with each unit.                                                                                                                                                                |

## Ordering Information

|                                                                                                                   |            |
|-------------------------------------------------------------------------------------------------------------------|------------|
| LTC 9348/00 Series Indoor Housings<br>for cameras/lens to 216 mm (8.5 inch), ceiling mount, tinted, metal backbox | LTC9348/00 |
|-------------------------------------------------------------------------------------------------------------------|------------|

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Americas:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**