

Network Camera

VB-C300


you can



Total coverage of all your surveillance and monitoring requirements. The VB-C300 features a wide-angle Canon AF lens with a 70° field of view and 2.4x zoom. Progressive scan, excellent low-light performance and audio support make it perfect for surveillance and monitoring applications.

Key features

- Canon wide-angle auto focus lens with 70° field of view
- Ultra-wide coverage with remote PTZ control (340° pan, 115° tilt, 2.4x zoom)
- Smooth, progressive scan video at 25 frames/sec for crystal clear images of moving subjects
- Exceptional low light performance: Colour images as low as 1 lux and Auto Day/ Night Modes
- Full duplex audio support: transmit live audio to and from the camera site
- Built-in terminals for connection to external sensors and alarms
- Three installation options: upright, inverted, or in optional ceiling dome
- Optional housings and mounts for versatile indoor and outdoor installations.

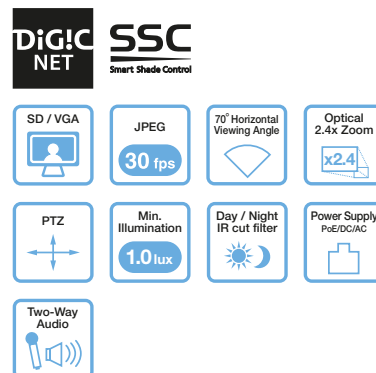

Canon


VB-C300

Specifications


IMAGE SENSOR	
Type	1/4 inch CCD with primary colour filter
Number of Pixels	310,000 effective
Video System	PAL
Scanning System	Progressive
OPTICS	
Zoom Magnification & Control	2.4x Powered Zoom (at infinity focus)
Focal Length	3.0mm (wide) – 7.2mm (telephoto)
Horizontal Field of View	70.8° (wide) – 29.6° (telephoto)
Lens F-Number	f/2.0 – f/3.4
Minimum Subject Illumination	Day Mode: 1 lux (Colour, at 1/30 sec shutter speed) Night Mode: 0.25 lux (Mono, at 1/30 sec shutter speed)
Focus Control	Auto-Focus with Manual override
Focusing Region	Day Mode: 0.3m – infinity / Night Mode: 0.6m – infinity
Aperture	Auto Iris Servo System
White Balance	Auto / Manual Preset / One-Shot
Imaging Modes	Day Mode, Night Mode (Auto / Manual / Scheduled)
IR Illuminator Type & Range	–
Backlight Compensation	3 levels
SERVER UNIT	
Video Output Size	640 x 480 / 320 x 240 / 160 x 120 pixels
Frame Rate	0.1fps - 25 fps (max)
Video Compression Method	Motion-JPEG (video), JPEG (still images)
Audio Compression Method	G.711 (64Kbps), Full duplex
Simultaneous Distribution	5 clients at 25 fps / 15 clients (max) at 10 fps
Supported Protocols	HTTP, DHCP, WV-HTTP (Canon)
Internal Memory	Buffer None
Motion Detection / Auto Tracking	Not supported
Shade Correction	Supported via software

CONNECTORS	
Network Interface	RJ-45 Ethernet, 10/100TX Auto-Negotiation
Composite Video Output	3.5mm mini-jack
Audio Input (Line In)	3.5mm mini-jack
Audio Output (Line Out)	3.5mm mini-jack
External Device I/O	6-pin multi-connector: 2 x Inputs / 1 x Output
MECHANISMS	
Pan Angle Range	340° (-170° to +170°)
Tilt Angle Range	115° (-25° to +90°)
Maximum Rotation Speed	Pan: 90° per sec / Tilt: 70° per sec
Infrared Cut Filter	Power-driven insertion and removal (Day / Night Modes)
Preset Positions	20 presets (Pan, Tilt, Zoom)
RATINGS	
Dimensions (W x H x D)	Network Camera: 132mm x 122mm x 130mm AC Adaptor: 58mm x 25mm x 118mm
Weight	780g / 975g with ceiling mounting hardware
Power over Ethernet Compatible	Yes (Conforms to IEEE 802.3af)
Power Sources	12V DC or 24V AC (via supplied two-pin connector) / 100V – 240V AC, 50/60Hz (via optional AC Adaptor)
Power Consumption	10W Max (on PoE) / 13W Max (on AC Adaptor)
Operating Environment	Temperature: -10°C to +45°C, Humidity: 20% to 85% RH
WHAT'S IN THE BOX	
	VB-C300 Network Camera, Ceiling Mounting Plate, Camera Skirt for Ceiling Installation, Screws x 4, Anti-Fall Safety Wire, Power Connector, Rubber Feet, Mounting Template, Setup CD-ROM*, Instruction Manual, Quick Guide. *Bundled software (included on the CD-ROM) enables monitoring and recording of up to four cameras.
<small>All data is based on Canon's standard testing methods. This Leaflet and the specifications of the product have been developed prior to the date of product launch. Specifications are subject to change without notice. *and ©: All company and/or product names are trademarks and/or registered trademarks of their respective manufacturers in their markets and/or countries.</small>	

Dimensions

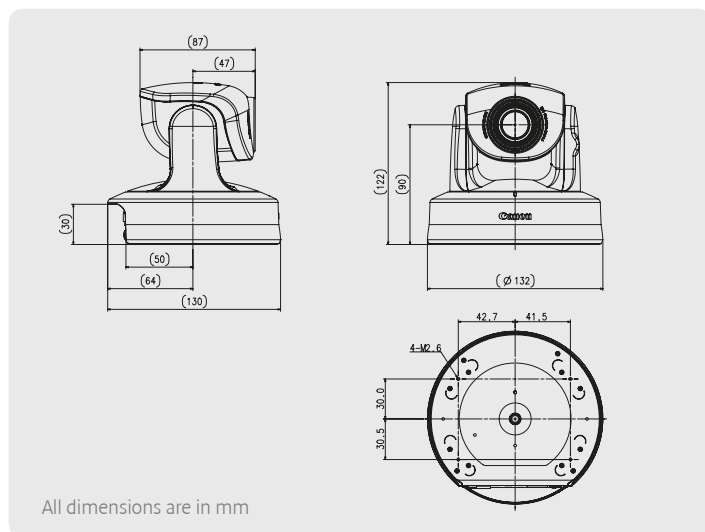

Connectivity

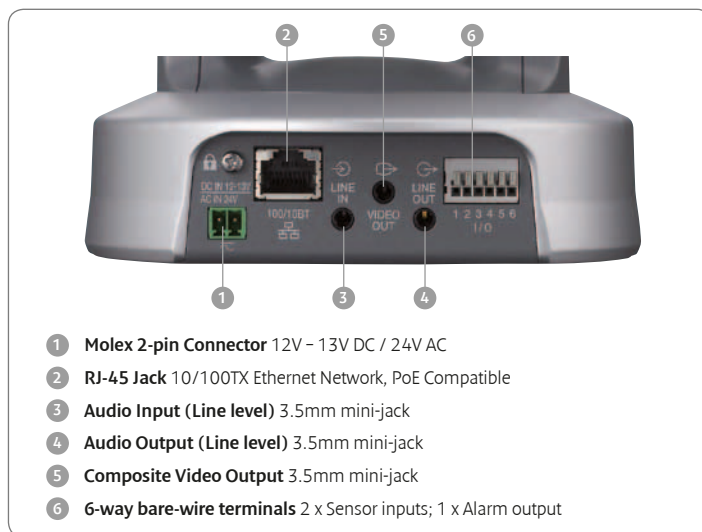

Optional Accessories

- AC Power Supply PA-V17 (Europe)
- AC Power Supply PA-V17 (Great Britain)
- Indoor Dome Housing VB-RD41S-S (Smoked)
- Indoor Dome Housing VB-RD41S-C (Clear)
- Video Recording Software RM-9
- Video Recording Software RM-25
- Video Recording Software RM-64



For more detailed accessory information please refer to the accessory sales sheet.

Canon Inc.
canon.com

Canon Europe
canon-europe.com

English Edition
© Canon Europa N.V., 2011

