


(8) 10-bit digital video channels with 8 bi-directional data channels + redundant point-to-point dual small form-factor pluggable (SFP) optical ports



Description

The ComNet™ FVT/FVR8SFP2RD8 series optical video link provides eight 10-bit medium-haul quality digital video channels, eight bi-directional data channels and has dual optical (SFP) ports to provide a redundant Point-to-Point topology.

The redundant Point-to-Point topology using the dual optical ports provide fail safe operation in the event of loss of one fiber or one optical module. Each port accepts a wide variety of SFP modules.

Plug-and-play design ensures ease of installation and no electrical or optical adjustments are ever required. Bi-color (Red/Green) LED indicators are provided for confirming operating status. These units are interchangeable between stand-alone or card mount configurations.

The data channels support RS232, RS422 and 2 wire and 4 wire RS485. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are ever required. Bi-color (Red/Green) LED indicators are provided for confirming operating status. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

Features

- Up to eight 10-bit digital video channels
- 8 Bi-directional data channels
- Dual optical ports (SFP) Redundant Point-to-Point configuration
- Exceeds all requirements for RS-250C medium haul transmission
- Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- Tested and certified by an independent laboratory for full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Automatic resettable fuses on all power lines
- Hot-Swappable Modules
- Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- Lifetime Warranty

(SFP) = Small Form-Factor Pluggable Module



(8) 10-bit digital video channels with 8 bi-directional data channels + redundant point-to-point dual small form-factor pluggable (SFP) optical ports

FVT/FVR8SFP2RD8

specifications

VIDEO

Video Input:	1 volt pk-pk (75 ohms)
Overload:	>1.5V pk-pk
Bandwidth:	5 Hz - 6.5 MHz
Differential Gain:	<2%
Differential Phase:	TBA
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	67 dB @ Maximum Optical Loss Budget
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

DATA

Data Interface:	RS-232, RS-422 and RS-485 (2W/4W)
Data Format:	NRZ, NRZI, Manchester, Bi-phase, Sensornet
Data Rate:	DC-250 Kbps (NRZ)

WAVELENGTH

SFP (Small Form-Factor Pluggable) dependent

NUMBER OF FIBERS*

SFP (Small Form-Factor Pluggable) dependent

OPTICAL EMITTER

SFP (Small Form-Factor Pluggable) dependent

LED INDICATORS

- Fiber Status - Video Sync Presence
- Received Data - Transmitted Data
- Power

CONNECTORS

Optical:	2 SFP modules Dual Port configuration (Required for Redundant Point-to-Point operation)
Power:	Terminal Block
Video:	BNC
Data:	Terminal Block

ELECTRICAL & MECHANICAL

Power:	8-15 VDC @ 3W
Surface Mount:	From Rack
Rack Mount:	3
Number of Rack Slots:	Automatic Resettable Solid-State Current Limiters
Current Protection:	Meets IPC Standard
Circuit Board:	6.1 x 5.3 x 3.3 in., (15.5 x 13.5 x 8.3 cm)
Size (in./cm) (LxWxH):	<2 lb./0.9 kg
Shipping Weight:	

ENVIRONMENTAL

MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)†

* Multimode fiber needs to meet or exceed fiber standard ITU-T G.651. Single mode fiber needs to meet or exceed fiber standard ITU-T G.652

† May be extended to condensation conditions by adding suffix '-C' to model number for conformal coating.


AGENCY COMPLIANCE



MADE IN THE
USA

Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory) DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

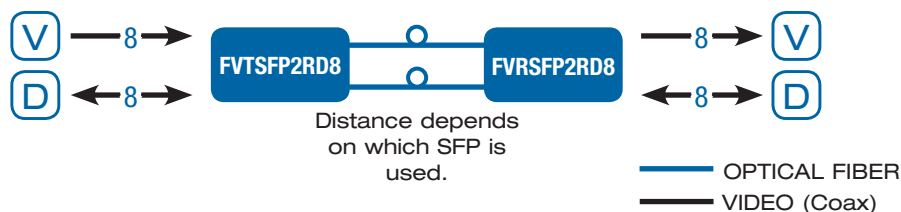

comnet
Communication Networks

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET
8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET