

# CSP-230 & 430

Stainless Steel Housings




## Features




- High grade stainless steel housing
- Toughened polycarbonate window
- Manual pan and tilt camera cradle
- Fixed or vari-focal DC lens
- Conduit cable entry
- External or Internal
- Stylish & very tough made for all environments
- Corner and wall mount models

## Dimensions

CSP-230 Wall Unit



CSP-430 Corner Unit

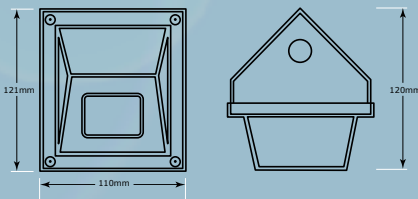

## Specifications

Fixed lens Models

Items	Medium Mono	EX -View Mono	High Mono	Medium Colour	High Colour	Medium Day / Night
Wall Model	230SM	230SMEX	230HM	230SC	230HC	230SCDN
Corner Model	430SM	430SMEX	430HM	430SC	430HC	430SCDN
Image Sensor	1/3" Sony CCD	1/3" Sony CCD	1/3" Sony CCD	1/4" Sony CCD	1/3" Sony CCD	1/4" Sony CCD (IR Filter)
Power	12V DC 120mA	12V DC 150mA	12V DC 90mA	12V DC 85mA	12V DC 90mA	12V DC 85mA
TV System	PAL or NTSC ( Add N at the end of the code for NTSC )					
Resolution	420 TVL	400 TVL	600 TVL	380-470 Enhanced	470-580 Enhanced	380-470 Enhanced
Sensitivity	0.05 LUX F 1.2	0.003 LUX F 1.2	0.05 LUX F 1.2	0.5 LUX F 1.2	0.3 LUX F 1.2	0.5 LUX F 1.2
Lens	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6mm	Fixed 3.6 mm	Fixed 3.6 mm
Colour	Ivory Rating IP66				Weight : CSP230 (550g) CSP430 (660 g)	

Vari-focal Lens Models

Items	High Mono Vari-focal Lens	High Colour Vari-focal Lens	High Colour True Day / Night Vari-focal Lens
Wall Model	230-HMV	230-HCV	230-HTDNV
Corner Model	430-HMV	430-HCV	430-HTDNV
Image Sensor	1/3" Sony CCD	1/3" Sony CCD	1/3" Sony CCD
Power	12V DC 120mA	12V DC 140mA	12V DC 140mA
TV System	PAL or NTSC ( Add N at the end of the code for NTSC )		
Resolution	600 TVL	480 TVL	480 TVL
Sensitivity	0.05 LUX F 1.2	0.5 LUX F 1.3	0.5 LUX F 1.3
Lens	DC Auto Iris 3.8~9.5 mm	DC Auto Iris 3.8~9.5 mm	DC Auto Iris 3.8~9.5 mm

CSP-430 Corner Unit



**Ideal for:** Banks, Shops, Lifts, Airports, Car Parks and Prisons.

**Unlike many cast products** the 230 and 430 range are made from high grade stainless steel making them very tough and corrosion resistant. The housings are small yet discrete and easy to install. Each unit comes complete with plug and play capacity. The units have a bolt in 4mm polycarbonate which has been weather sealed so it is ideal for harsh conditions and able to withstand a high level of abuse. The units also have cable entry via a 20mm conduit cable point to the top on the CSP-430. The CSP-230 is fitted with two conduit points one to the back and one to the underside.

All cameras come complete with 1.8 metres of power cable with a BNC plug and stainless steel tamper-proof screws are fitted. Each unit comes complete with hex key.

