




### Features

- Internal surface mount tamper proof impact dome
- Extra toughened smoked or clear polycarbonate
- Machined from a solid block of aluminium
- Locking screws and key as standard
- Stunning quality and performance
- Very versatile and stylish
- Controlled Impact tested to 20 Joules
- Micro dome is only 82mm Diameter x 61mm high
- Ideal for the transport industry

### Dimensions

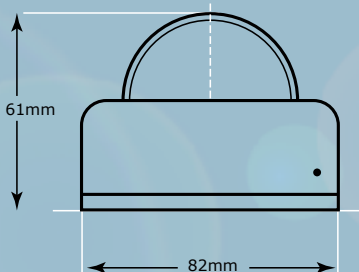

### Specifications

Items	Medium Mono	EX-View Mono	High Mono	Medium Colour	High Colour	Medium Day / Night
Model Code	MSM	MSM-EX	MHM	MSC	MHC	MSCDN
Image Sensor	1/3" Sony CCD	1/3" Sony CCD	1/3" Sony CCD	1/4" Sony CCD	1/3" Sony CCD	1/4" Sony CCD (IR Filter)
Power	12V DC 120mA	12V DC 150mA	12V DC 90mA	12V DC 90mA	12V DC 90mA	12V DC 90mA
TV System	PAL or NTSC ( Add N at the end of the code for NTSC )					
Resolution	420 TVL	400 TVL	600 TVL	380-470 Enhanced	470-580 Enhanced	380-470 Enhanced
Sensitivity	0.05 LUX F 1.2	0.003 LUX F 1.2	0.05 LUX F 1.2	0.5 LUX F 1.2	0.3 LUX F 1.2	0.5 LUX F 1.2
Lens	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm
Colour	Silver				Weight 274g	

**Made to the highest specifications without the designer price tag!**

**The Smallest of the CSP Range** machined from a solid block of aluminium. This micro impact dome is designed to be ceiling mounted. It is fitted with a anti-tamper locking screw to the side. This very discrete small rugged unit is fitted with a reinforced polycarbonate cover able to withstand a 12 pound sledgehammer and has also been control tested at 20 Joules.

**Only** the highest quality colour and monochrome CCD cameras are fitted.

**Easy to install** all cameras come complete with 1.8 metres BNC power cable, Stainless steel tamper-proof screws and Hex key as standard

**Conclusion:** A great choice for a fixed lens internal camera that has to be anti tamper resistant. Ideal for many applications.



*The Professionals Choice*

