


Features

- Internal surface mount tamper proof impact dome
- Extra toughened smoked or clear polycarbonate
- Machined from a solid block of aluminium
- Locking screws and key as standard
- Stunning quality and performance
- Very versatile and stylish
- Controlled Impact tested to 20 Joules
- Micro dome is only 82mm Diameter x 61mm high
- Ideal for the transport industry

Dimensions

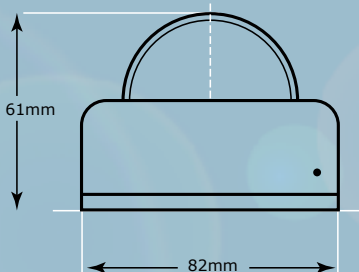

Specifications

Items	Medium Mono	EX-View Mono	High Mono	Medium Colour	High Colour	Medium Day / Night
Model Code	MSM	MSM-EX	MHM	MSC	MHC	MSCDN
Image Sensor	1/3" Sony CCD	1/3" Sony CCD	1/3" Sony CCD	1/4" Sony CCD	1/3" Sony CCD	1/4" Sony CCD (IR Filter)
Power	12V DC 120mA	12V DC 150mA	12V DC 90mA	12V DC 90mA	12V DC 90mA	12V DC 90mA
TV System	PAL or NTSC (Add N at the end of the code for NTSC)					
Resolution	420 TVL	400 TVL	600 TVL	380-470 Enhanced	470-580 Enhanced	380-470 Enhanced
Sensitivity	0.05 LUX F 1.2	0.003 LUX F 1.2	0.05 LUX F 1.2	0.5 LUX F 1.2	0.3 LUX F 1.2	0.5 LUX F 1.2
Lens	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm	Fixed 3.6 mm
Colour	Silver				Weight 274g	

Made to the highest specifications without the designer price tag!

The Smallest of the CSP Range machined from a solid block of aluminium. This micro impact dome is designed to be ceiling mounted. It is fitted with a anti-tamper locking screw to the side. This very discrete small rugged unit is fitted with a reinforced polycarbonate cover able to withstand a 12 pound sledgehammer and has also been control tested at 20 Joules.

Only the highest quality colour and monochrome CCD cameras are fitted.

Easy to install all cameras come complete with 1.8 metres BNC power cable, Stainless steel tamper-proof screws and Hex key as standard

Conclusion: A great choice for a fixed lens internal camera that has to be anti tamper resistant. Ideal for many applications.



The Professionals Choice

