



THE VALIDIKEY™ 2 PLUS

DESIGNED AND DEVELOPED TO MEET THE SECURITY NEEDS OF SMALL, MEDIUM, AND LARGE SCALE FACILITIES.



**WIEGAND READER SHOWN OPTIONAL*

- » Affordable
- » Customizable
- » Scalable
- » Auditable
- » Secure CyberKey Storage



Keypad Display

LCD Touchscreen Displays Status and Accepts PIN Input



Wiegand RFID Reader Option

Contact CyberLock for More Information



Connections

Ethernet Via RJ45 and Wireless Radio for WLAN

The ValidiKey 2 Plus gives users the option to have CyberLock, Inc. custom-mount most existing Wiegand RFID readers onto the vault, allowing for integration with an existing security system.



VALIDIKEY 2 PLUS

Part Number: CKV-V02-PLUS

| CAW | Version 8.0 | Version 9.0 (or newer) |
|------------|--------------------------|-------------------------------------|
| Enterprise | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Basic | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

The ValidiKey 2 Plus is a two-key vault that stores, secures, and programs up to two CyberKey smart keys. Simply input a PIN and/or scan an RFID card. The vault will program a key based on the credentials presented and the vault door will unlock. It is also scalable, which means multiple vaults can communicate within a larger CyberAudit® Enterprise system.


Specifications

| | |
|-------------------------------|---|
| Physical | Black powder-coated aluminum case, mounts to a wall, latch tested to 1200 lbs |
| Operating Temperatures | 32° to 122° F; 0° to 50° C, non-condensing indoor or sheltered installations only |
| Dimensions | 6.0" L x 5.6" W x 4" H (152 mm x 141 mm x 101 mm) |
| Weight | 35.84 oz (1016 g) |
| Power | Input at 12V @ 1 amp, 110/220VAC, US power adaptor provided, other country cords available |
| Audio Indicator | Multi-tone beeper indicates startup, door open, door left open, door closed, wrong key removed, invalid key inserted |
| Memory | 1 GB RAM and 4GB storage for settings, key configurations, and audit trail storage |
| Connection | Ethernet via RJ45 and Wi-Fi |
| Software | Operates as a communicator in CyberAudit Enterprise 9.0 (or newer) |
| Compatible Keys | CK-RXD, CK-RXD2, and all rechargeable Generation 2 keys |
| User Panel | LCD touch screen displays status and responds to input from button presses Users may enter PINs and other information in response to display prompts |
| Compatible RFID Cards | Reads the unique ID from unencrypted 13.56 MHz, ISO 14443 Type A & B and ISO 15693 format cards (i.e. I-Code, Mifare, Legic) |
| Wiegand RFID Reader | Contact CyberLock Sales for more information |

Standard



Wiegand
RFID

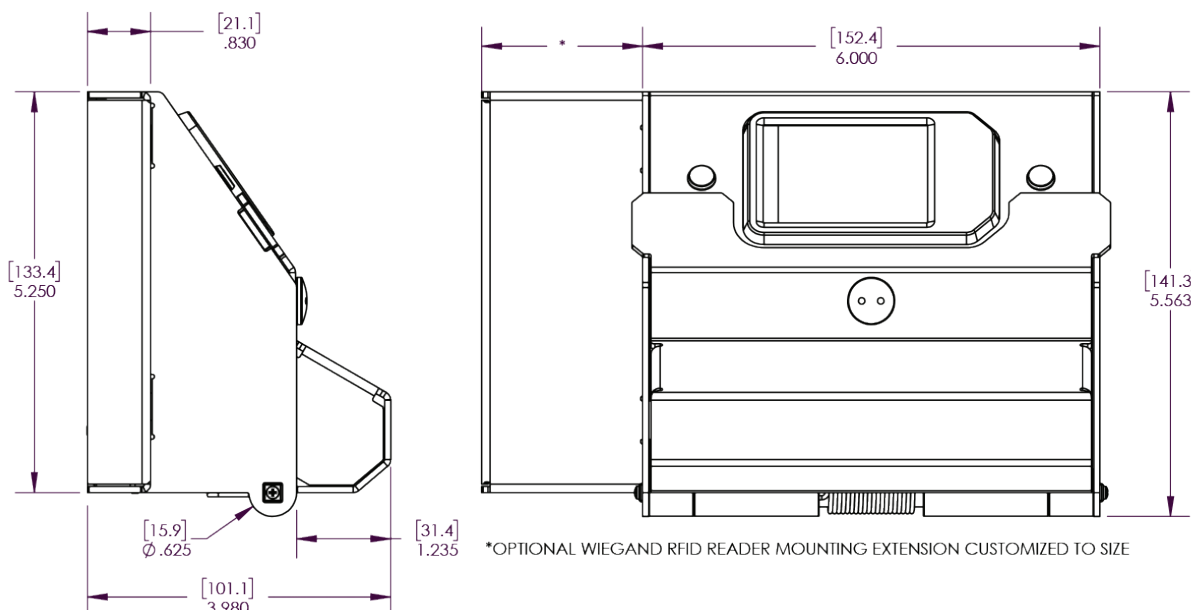

Notes:
Dimensions in inches (mm)
Drawing not to scale
Ø indicates diameter