

DH-CA-D581B

700TVL Day/Night WDR Zoom Dome Camera



Features

- > 1/3" SONY Super HAD CCD II & Effio-P DSP
- > High resolution of 700TVL(Color), 750TVL(B/W)
- > WDR, Day/Night(ICR), DNR (2D&3D), Auto iris, AWB, AGC,BLC, MD, DZOOM, DIS, Privacy Masking, Picture Adjustment
- > 4.0~9.0mm varifocal lens (2.8~12mm optional)
- > OSD, DC12V (-A model: DC12V/AC24V dual power supply)


DH-CA-D581B

Technical Specifications

Model	DH-CA-D581BP(-A)	DH-CA-D581BN(-A)
Camera		
Image Sensor	1/3" Super HAD CCD II	
Effective Pixels	976(H) x 582(V), 570K pixels	976(H) x 494(V), 480K pixels
Horizontal Resolution	Color: 700TVL, B/W: 750TVL	
Electronic Shutter	1/50s~1/100,000s, 10s~1/100,000s@Slow shutter, 512x	1/60s~1/100,000, 8s~1/100,000s@Slow shutter, 512x
Synchronization	Internal	
Min. Illumination	Color: 0.001Lux@F1.2, 0.0001Lux@F1.2(Slow shutter, 512x)	
	B/W: 0.0001Lux@F1.2, 0.00001Lux@F1.2(Slow shutter, 512x)	
S/N Ratio	>60dB	
Video Output	1Vp-p Composite Output (75Ω/BNC)	
Camera Features		
OSD	English, Chinese	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / WDR(75dB)	
White Balance	Auto Trace WB1 / Auto Trace WB2 / Manual / Auto	
Gain Control	Auto / Manual	
Noise Reduction	2D / 3D	
Privacy Masking	Up to 4 areas	
Digital Zoom	Magnitude / Horizontal / Vertical	
Picture Adjustment	Mirror / Brightness / Contrast / Sharpness / Hue / Gain / Slow Shutter	
Lens		
Focal Length	4.0~9.0mm (2.8~12mm optional)	
Focus Control	Manual	
Lens Type	Manual /Auto Iris	
Mount Type	Φ14	
General		
Power Supply	DC12V±10%, (-A model: DC12V/AC24V dual power supply)	
Power Consumption	Max 3.5W	
Working Environment	-30°C~+60°C / 20%~80%RH	
Dimensions	Φ140.8mm x 120mm	
Weight	400g (-A: 450g)	

DH-CA-D581B

Dimensions (mm)

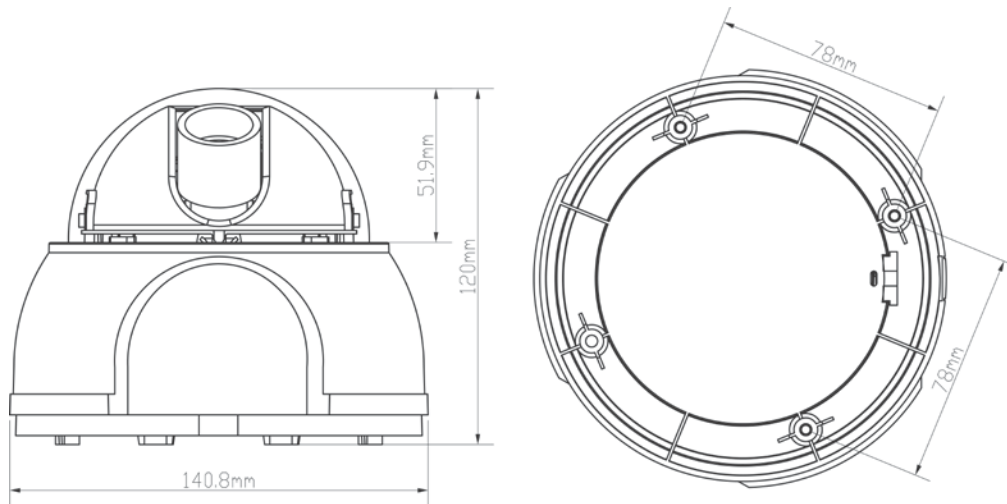

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2012 Dahua Technology Co., Ltd.