

## DH-CA-F781E

### 700TVL Day/Night Low Light Camera



### Features

- 1/3" SONY Super HAD CCD II & Effio DSP
- High resolution of 700TVL
- DWDR, Day/Night(ICR), DNR(2D&3D), Auto iris, AWB, AGC, BLC, MD, DZOOM, DIS, Privacy Masking, Picture Adjustment
- OSD, AC24V/DC12V


# DH-CA-F781E

## Technical Specifications

Model	DH-CA-F781EP-A	DH-CA-F781EN-A
<b>Camera</b>		
Image Sensor	1/3" Super HAD CCD II	
Effective Pixels	976(H) x 582(V), 570K pixels	976(H) x 494(V), 480K pixels
Horizontal Resolution	700TVL	
Electronic Shutter	1/50s~1/100,000s, 10s~1/100,000s@Slow shutter, 512x	1/60s~1/100,000, 8s~1/100,000s@Slow shutter, 512x
Synchronization	Internal / Line lock	
Min. Illumination	Color: 0.001Lux@F1.2, 0.0001Lux@F1.2(Slow shutter, 512x)	
	B/W: 0.0001Lux@F1.2, 0.00001Lux@F1.2(Slow shutter, 512x)	
S/N Ratio	More than 60dB	
Video Output	1Vp-p Composite Output (75Ω/BNC)	
<b>Camera Features</b>		
OSD	English, Chinese, French, German, Russian, Spanish, Portuguese, Japanese	
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / DWDR	
White Balance	Auto Trace WB1 / Auto Trace WB2 / Manual / Auto / Slow Shutter	
Gain Control	Auto / Manual	
Noise Reduction	2D / 3D	
Privacy Masking	Up to 4 areas	
Digital Zoom	Magnitude / Horizontal / Vertical	
Picture Adjustment	Mirror / Brightness / Contrast / Sharpness / Hue / Gain	
<b>Lens</b>		
Lens Type	Manual / Auto iris	
Mount Type	C / CS	
<b>Auxiliary Interface</b>		
RS485	1 Port	
<b>General</b>		
Power Supply	AC24V±10% / DC12V±10%	
Power Consumption	Max 6W	
Working Environment	-30°C~+60°C / 20%~80%RH	
Dimensions(W×D×H)	64.6mm x 131.3mm x 59.6mm	
Weight	500g	

## DH-CA-F781E

### Dimensions (mm)

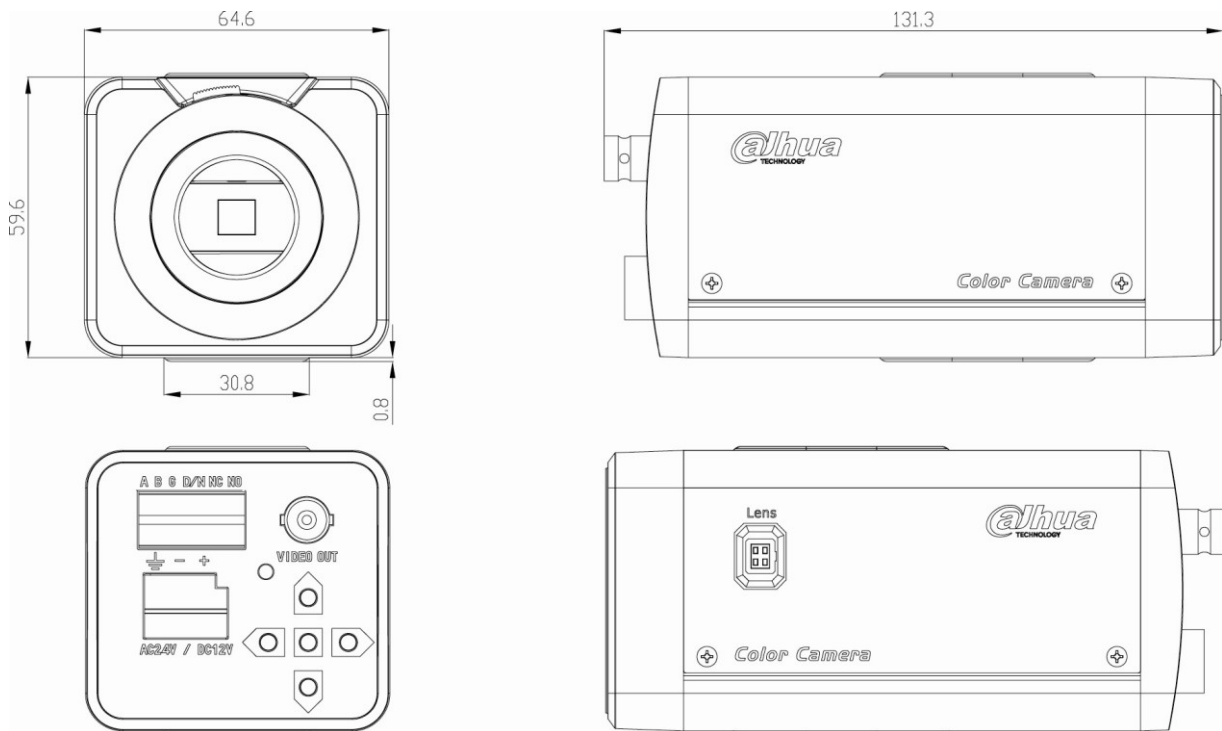

### Accessories (optional)



### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.