

DH-HAC-HDBW2120E

1.4Megapixel 720P Vandal-proof IR HDCVI Mini Dome Camera



Features

- 1/3" 1.4Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 3.6mm fixed lens (2.8mm, 6mm, 8mm optional)
- Max. IR LEDs length 30m, Smart IR
- IP67, IK10, DC12V


DH-HAC-HDBW2120E

Technical Specifications


Model	DH-HAC-HDBW2120EP		DH-HAC-HDBW2120EN
Camera			
Image Sensor	1/3" 1.4Megapixel CMOS		
Effective Pixels	1305(H)×1049(V)		
Electronic Shutter	1/3s~1/100,000s		
Video Frame Rate	25/50fps@720P	30/60fps@720P	
Synchronization	Internal		
Mini. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D/3D		
OSD Menu	Support		
Lens			
Focal Length	3.6mm (2.8mm, 6mm, 8mm optional)		
Angle of View	H: 72.3° (91.6° /46° /34.8°)		
Mount Type	M12		
General			
Power Supply	DC12V±20%		
Power Consumption	Max 3.5W		
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 800m via 75-3 coaxial cable		
Ingress Protection	IP67 & IK10		
Dimensions(W×D×H)	Φ109.9mm×81.0mm		
Weight	0.3kg		
Material	Metal		

DH-HAC-HDBW2120E

Dimensions (mm)

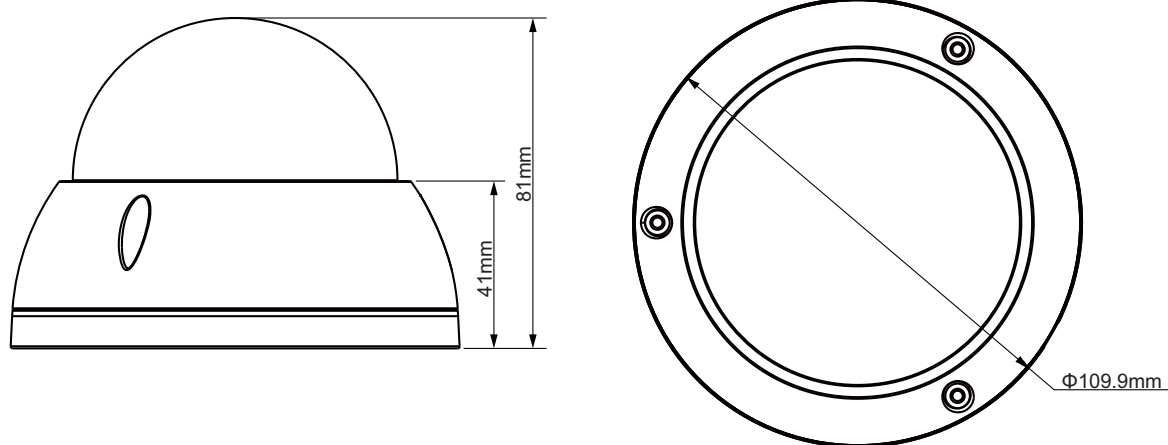

Accessories (optional)

		
PFB200W	PFA136	PFA152

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email:overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.