

## DH-HVR0404AH-V(D)

### 8 Channel 960H & IP 4HDD Hybrid ATM DVR



### Features

- > Up to 8 cameras with SXGA(1280×1024) display
- > H.264 dual-stream video compression
- > IP: Max 60fps@1080p, 120fps@720p
- > Analog: 4 channel@960H(960×576/960×480) realtime recording
- > HDMI/VGA/TV simultaneous video output
- > Full channel synchronous realtime playback
- > Auto IP address acquisition by IP Search function
- > 3D intelligent positioning with DAHUA PTZ dome
- > ONVIF Version 2.0 conformance
- > Up to 4 SATA HDDs, 1 eSATA, 3 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Built-in 7 inch screen(-VD)

## DH-HVR0404AH-V(D)

### Technical Specifications


Model	DH-HVR0404AH-V	DH-HVR0404AH-VD
<b>System</b>		
Main Processor	High performance embedded microprocessor	
Operating System	Embedded LINUX	
<b>Video</b>		
IP Input	4 channel	
Analog Input	4 channel, BNC	
Analog Video Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)	
Output	1 HDMI, 1 VGA, 1 TV, BNC	
<b>Audio</b>		
Input	4 channel, BNC	
Output	1 channel, BNC	
Bidirectional Talk	1 channel Input, BNC(200-2800mV, 30K $\Omega$ ), 1 channel Output, BNC(200-3000mV, 5K $\Omega$ )	
Speaker	1 BNC	
<b>Display</b>		
Interface	1 HDMI, 1 VGA, 1 TV, BNC	
LCD	N/A	7-inch color LCD
Resolution	1280 $\times$ 1024, 1280 $\times$ 720, 1024 $\times$ 768, 800 $\times$ 600	
Display Split	1/4/8/9	
Privacy Masking	4 self-defined four-sided zones for privacy masking for each camera	
OSD	ATM/POS information, camera title, time, video loss, camera lock, motion detection, recording	
<b>Recording</b>		
Video/Audio Compression	H.264 / G.711	
Resolution	1080P(1920 $\times$ 1080) / 720P(1280 $\times$ 720) / 960H(960 $\times$ 576/960 $\times$ 480) / D1/4CIF(704 $\times$ 576/704 $\times$ 480) / HD1(352 $\times$ 576/352 $\times$ 480) / 2CIF(704 $\times$ 288/704 $\times$ 240) / CIF(352 $\times$ 288/352 $\times$ 240) / QCIF(176 $\times$ 144/176 $\times$ 120)	
Record Rate	IP	Max 120fps@720P /60fps@1080P
	Analog	All channel@960H (25/30fps)
Bit Rate	IP: 48~8192 Kb/s, Analog: 48~4096Kb/s	
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
<b>Video Detection &amp; Alarm</b>		
Trigger Events	Recording, PTZ, Tour, Alarm, Email, FTP, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22 $\times$ 18), Video Loss & Camera Blank	
Alarm Input	9 channel	

## DH-HVR0404AH-V(D)

Relay Output	6 channel
<b>Playback &amp; Backup</b>	
Playback Channel	1/4/9
Search Mode	ATM/POS, Time/Date, Alarm, Motion Detection & Exact search (accurate to second)
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom(any size)
Backup Mode	USB Device / Network /eSATA
<b>Network</b>	
Ethernet	RJ-45 port (10/100/1000M)
Network Functions	TCP/IP, UDP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Email, Alarm Server
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
<b>Storage</b>	
Internal HDD	4 SATA ports
External HDD	1 eSATA port
<b>Auxiliary Interface</b>	
USB	3 ports (2 rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
<b>General</b>	
Power Supply	AC 100~240 V, 50/60 Hz
Power Consumption	20W(without HDD)
Working Environment	-10°C ~ +55°C / 10~90%RH / 86~106kpa
Dimension(W×D×H)	200mm×300mm×180mm
Weight	3.5KG-4.5KG(without HDD)

# DH-HVR0404AH-V(D)

## System Connection

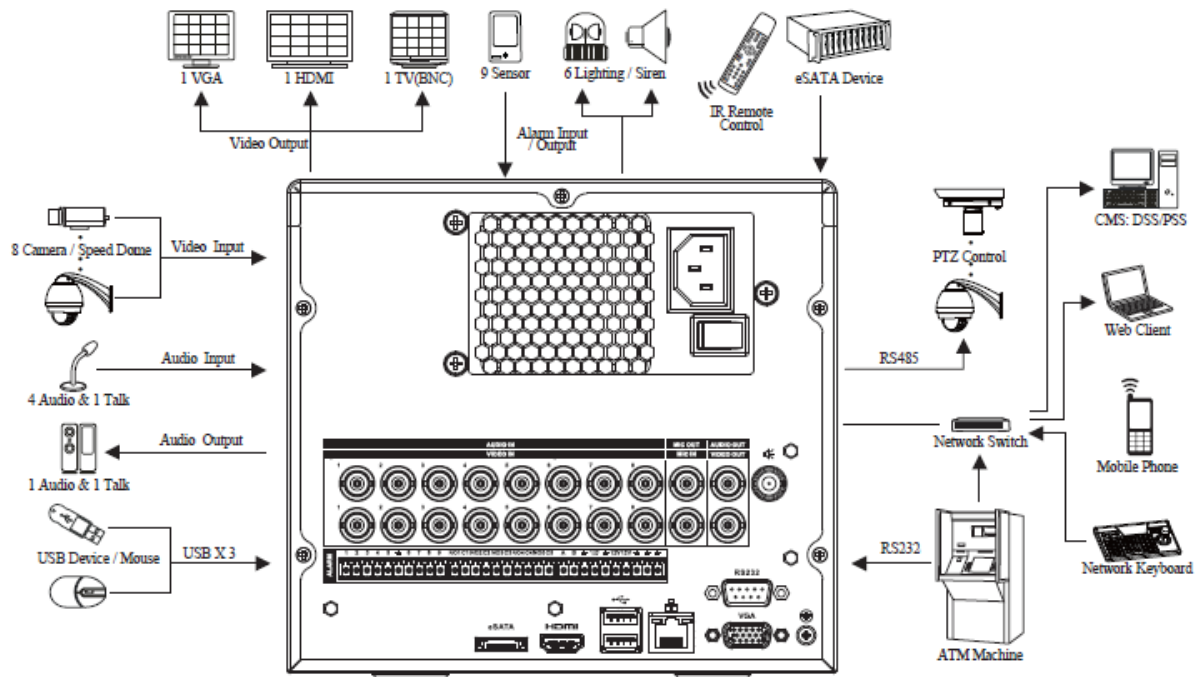

### Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.