

DH-NKB/DH-KBDB

Network Keyboard & Control Keyboard



Features

- > Keyboard to Control:
 - DAHUA Standalone DVR
 - DAHUA High Speed Dome
 - DAHUA Network High Speed Dome
 - Central Management Platform
 - Network Video Server
- > RS232, RS485 & Network Connections
- > Three Dimensional Joystick Control of PTZ Functions
- > Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Control
- > Auxiliary Functions
- > On-Screen Menu & User Operation Procedure Tips

DH-NKB/DH-KBDB

Technical Specifications


Model	DH-NKB	DH-KBDB
General		
Keyboard Keypanel	Electromechanical	
Joystick	3-axis, vector-solving, with twisting, return-to-center head	
Keyboard Connector	RJ-45, RS232, RS485	RS232, RS485
Keyboard Communication	Direct Mode, Network Mode	Direct Mode
Direct Mode	Interface: RS232/RS485 DVR Protocol: DH1/DH2 Dome Protocol: DH-SD/PELCO-D/PELCO-P/PELCO-D1/PELCO-P1	
Network Mode	Interface: RJ45 DVR/Network Dome: IP Address/Port/Protocol	N/A
Display	LCD, 84mm x 31mm	
Environmental		
Power Supply	Power adapter, input 100V~240V 50Hz / 60Hz, output DC12V/1000mA	
Power Consumption	5W	
Working Temperature	-10°C ~ +55°C	
Working Humidity	10%~90%	
Atmosphere Pressure	86kpa~106kpa	
Dimension	320mmx190mmx50mm (WxDxH) (height: 100mm including joystick)	
Weight	2.5KG	

Connection Sample

Direct Mode



Network Mode

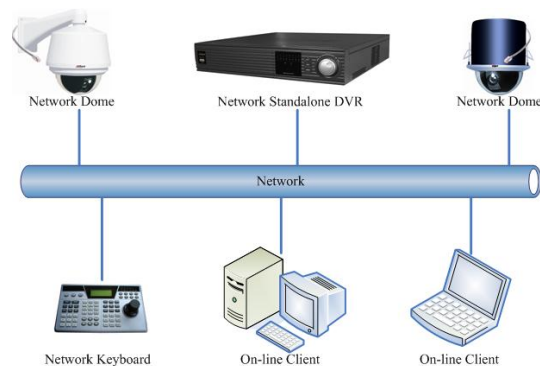

DH-NKB/DH-KBDB

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2010 Dahua Technology Co., Ltd.