

## DH-NVR4408/4416/4432

### 8/16/32CH 1.5U Network Video Recorder



#### Features

- > Up to 8/16/32 channel with 1080P realtime live view
- > H.264/MJPEG dual codec decoding
- > Max 200Mbps incoming bandwidth
- > Up to 5Mp resolution preview&playback
- > HDMI/VGA/TV simultaneous video output
- > 8/16 channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.3 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB, 2 USB(1 USB3.0)
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

# DH-NVR4408/4416/4432


## Technical Specifications

Model	DH-NVR4408	DH-NVR4416	DH-NVR4432
<b>System</b>			
Main Processor	Dual-core embedded processor		
Operating System	Embedded LINUX		
<b>Video</b>			
IP Camera Input	8 channel	16 channel	32 channel
Two-way Talk	1channel Input, 1channel Output, RCA		
<b>Display</b>			
Interface	1 HDMI,1 VGA,1 TV		
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768		
Display Split	1/4/8/9	1/4/8/9/16	1/4/8/9/16
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording		
<b>Recording</b>			
Compression	H.264/MJPEG		
Resolution	5Mp (2560×1920) /3Mp (2048×1536) /1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)&etc.		
Record Rate	200Mbps		
Bit Rate	48~ 8192kbps		
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop		
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec		
<b>Video Detection &amp; Alarm</b>			
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips		
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank		
Alarm Input	16 channel		
Relay Output	4 channel		
<b>Playback &amp; Backup</b>			
Sync Playback	1/4/9	1/4/9/16	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search		
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom		
Backup Mode	USB Device/Network/Internal SATA burner/eSATA Device		
<b>Network</b>			
Ethernet	1 RJ-45 port (10/100/1000Mbps)		
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)		
Max. User Access	128 users		
Smart Phone	iPhone, iPad, Android, Windows Phone		
<b>Storage</b>			
Internal HDD	4 SATA ports, up to 16TB		
External HDD	1 eSATA port		

## DH-NVR4408/4416/4432

Auxiliary Interface	
USB	2 ports (1 Rear USB3.0,1 Front USB2.0)
RS232	1 port, For PC communication&Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC 100V~240V,50/60HZ
Power Consumption	40W(without HDD)
Working Environment	-10°C ~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	1.5U, 440mm×410mm×70mm
Weight	6KG(without HDD)

### System Connection

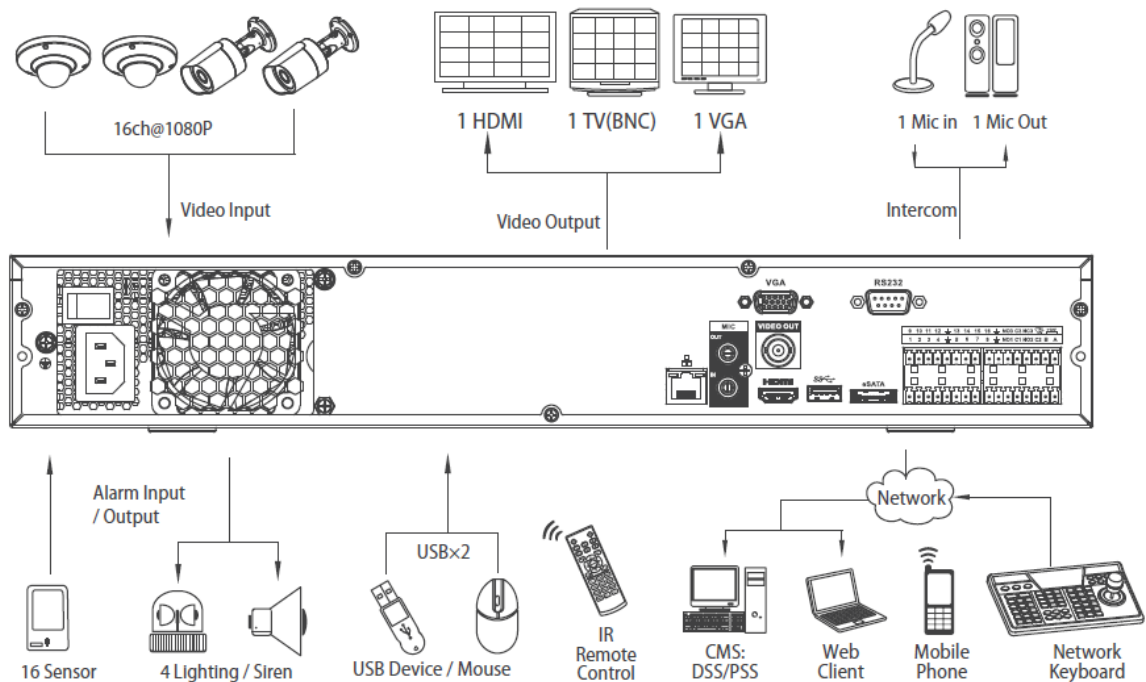

\*Takes NVR4416 as an example

### Dahua Technology Co., Ltd.

1199'BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

\*Design and specifications are subject to change without notice.

© 2014Dahua Technology Co., Ltd.