

DH-NVR5032

32CH 3U Network Video Recorder



Features

- > Up to 32 channel with 1080P realtime live view
- > H.264/MJPEG dual codec decoding
- > Up to 5MP resolution
- > Max 160Mbps transmission & recording resolution
- > HDMI/VGA/TV simultaneous video output
- > 32 channel synchronous realtime preview, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotek and etc.
- > ONVIF Version 2.2 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 16 SATA HDDs up to 64TB, 1 eSATA up to 16TB, 4 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-NVR5032


Technical Specifications

Model	DH-NVR5032
System	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video & Audio	
IP Camera Input	32 channel
Two-way Talk	1 channel Input, 1 channel Output, BNC
Display	
Interface	1 HDMI, 1 VGA, 1 TV
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768 & etc.
Display Split	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.264/MJPEG
Resolution	5MP(2560×1920)/3MP(2048×1536)/1080P(1920×1080)/720P(1280×720) / D1 (704×576/704×480)
Record Rate	Max 128Mbps (eg. 16ch 5MP@8Mbps, 16ch 1080P@8Mbps & etc.)
Bit Rate	48~ 8192kbps
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input	16 channel
Relay Output	6 channel
Playback & Backup	
Sync Playback	1/4/9/16
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device/eSATA Device /Network/Internal SATA burner
Network	
Ethernet	2 RJ-45 ports (10/100/1000Mbps)
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	16 SATA ports (16HDDs), up to 64TB

DH-NVR5032

External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
Auxiliary Interface	
USB	4 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC 100V~240V, 50/60 Hz
Power Consumption	<40W (without HDD)
Working Environment	-10°C~+55°C / 10%~90%RH / 86~106kpa
Dimension (W×D×H)	3U, 448mm×490mm×133.2mm
Weight	10.5kg~11.5kg (without HDD)

System Connection

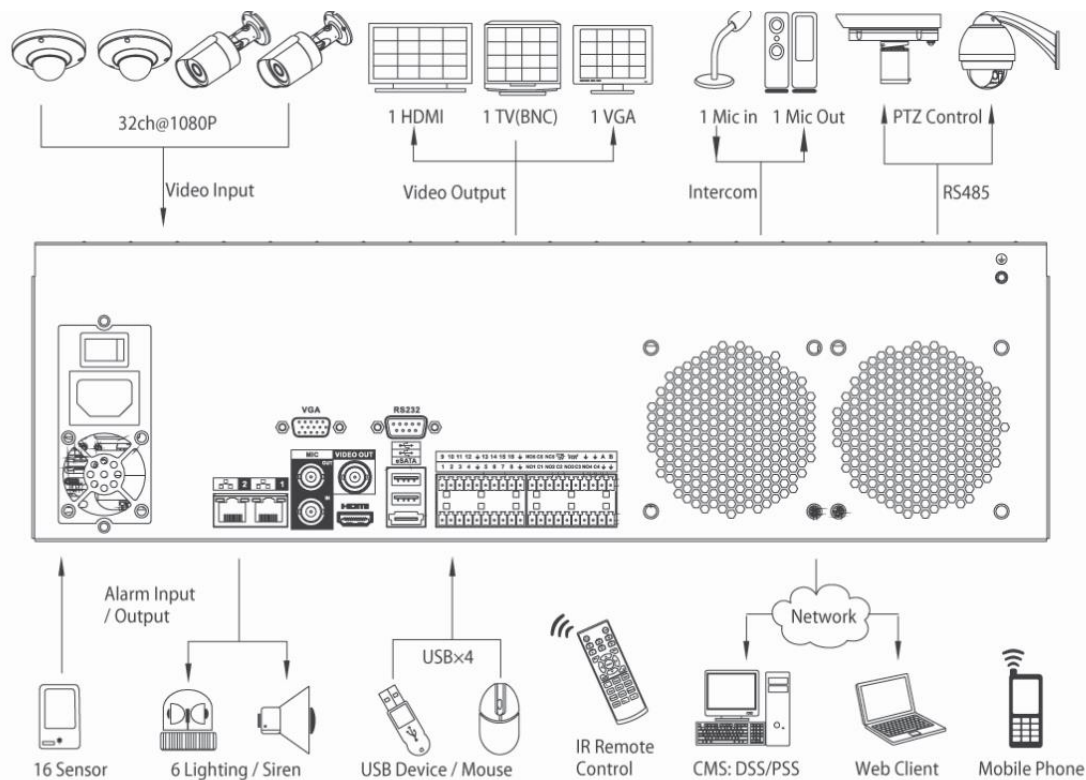

* Take NVR5032 as an example

Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.