

DH-NVR5408-8P

8 Channel 1.5U 8PoE Network Video Recorder



Features

- > Up to 8 channel with 1080p (or 3 channel 5Mp / 4 channel 3Mp) realtime live view
- > H.264/MJPEG dual codec decoding
- > Up to 5Mp resolution
- > Max 90fps@5Mp, 120fps@3Mp, 240fps@1080p, 480fps@720p, 960ps@D1 preview & recording
- > HDMI / VGA simultaneous video output
- > 8 channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videosec, Vivotech and etc.
- > ONVIF Version 2.2 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 4 SATA HDDs up to 16TB, 1 eSATA up to 16TB, 3 USB2.0
- > Support IPC UPnP, 8 PoE ports
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS

DH-NVR5408-8P


Technical Specifications

Model	DH-NVR5408-8P
System	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video & Audio	
IP Camera Input	8 channel
Two-way Talk	1 channel Input, 1 channel Output, BNC
Display	
Interface	1 HDMI, 1 VGA, 1TV
Resolution	2560×1920, 2048×1536, 1920×1080, 1280×1024, 1280×720, 1024×768
Display Split	1/4/8/9
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
Recording	
Compression	H.264 / MJPEG
Resolution	5Mp(2560×1920) / 3Mp(2048×1536) / 1080p(1920×1080) / 720p(1280×720) / D1 (704×576/704×480)
Record Rate	Max 90fps@5Mp, 120fps@3Mp, 240fps@1080p, 480fps@720p, 960ps@D1
Bit Rate	48~ 8192kbps
Record Mode	Manual, Schedule(Regular(Continuous), MD, Alarm), Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec
Video Detection & Alarm	
Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank
Alarm Input	8 channel
Relay Output	6 channel
Playback & Backup	
Sync Playback	1/4/8
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom
Backup Mode	USB Device / eSATA Device / Internal SATA burner/ Network
Network	
Ethernet	1 RJ-45 port (10/100M/1000M)

DH-NVR5408-8P

Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Storage	
Internal HDD	4 SATA ports (4HDDs or 3HDDs+1CD/DVD-RW), up to 16TB
External HDD	1 eSATA port (Max 4 SATA HDDs), up to 16TB
Auxiliary Interface	
USB	3 ports (2 Rear), USB2.0
RS232	1 port, For PC communication & Keyboard
RS485	1 port, For PTZ control
General	
Power Supply	AC 100~240V, 50/60 Hz
Power Consumption	40W
Working Environment	-10 ~ +55°C / 10~90%RH / 86~106kpa
Dimension (W×D×H)	1.5U, 440mm × 460mm × 68mm
Weight	6KG(without HDD)

System Connection

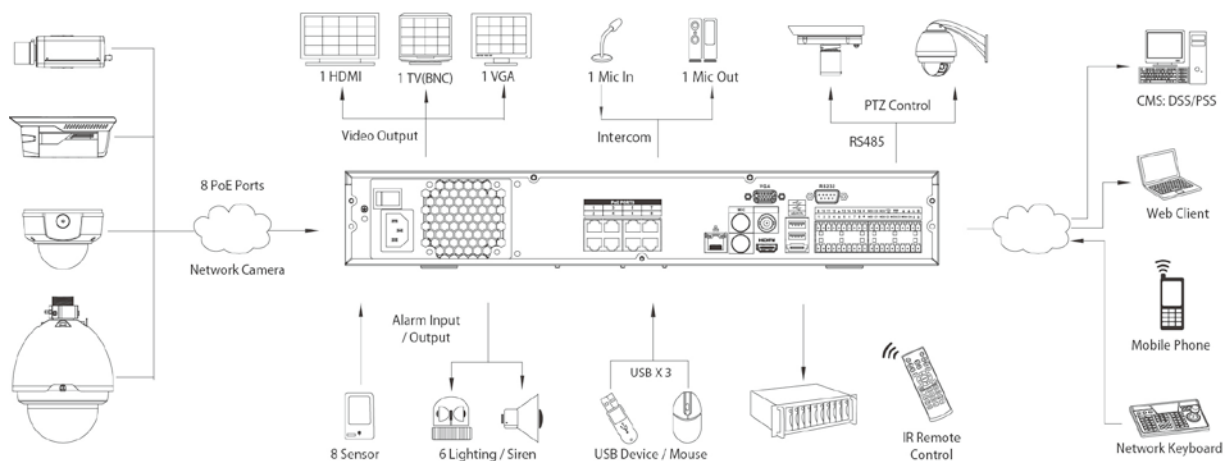

* Take NVR5408-8P as an example

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.