

## DH-SD6582A/82C-HN

---

### 2Mp Full HD 20x/30x Network PTZ Dome Camera



DH-SD6582A/82C-HN (Outdoor)



DH-SD65C82A/82C-HN (Indoor in-ceiling)

### Features

- Powerful 20x/30x optical zoom
- H.264 & MJPEG dual-stream encoding
- Max. 25/30fps@1080p resolution
- Defog(82C), DWDR, Day/Night(ICR), DNR (2D&3D), Auto iris, Auto focus, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- Max 400 °/s pan speed, 360° endless pan rotation
- Up to 255 presets, 5 auto scan, 8 tour, 5 pattern
- Built-in 7/2 alarm in/out
- Support intelligent 3D positioning with DH-SD protocol
- Micro SD memory, IP67, easy installation

# DH-SD6582A/82C-HN

## Technical Specifications


Model	DH-SD6582A-HN DH-SD65C82A-HN	DH-SD6582C-HN DH-SD65C82C-HN
<b>Camera</b>		
Image Sensor	1/2.8" Exmor CMOS	
Effective Pixels	1944(H) x 1092(V), 2 Megapixels	
Scanning System	Progressive	
Electronic Shutter Speed	1/1 ~ 1/30,000s	
Min. Illumination	Color: 0.05Lux@F1.6,B/W: 0.005Lux@F1.6	
S/N Ratio	More than 50dB	
Video Output	BNC(1.0Vp-p/75Ω), PAL / NTSC	
<b>Camera Features</b>		
Day/Night	Auto(ICR) / Color / B/W	
Backlight Compensation	BLC / HLC / DWDR (Digital WDR)	
White Balance	Auto, ATW, Indoor, Outdoor, Manual	
Gain Control	Auto / Manual	
Noise Reduction	2D / 3D	
Privacy Masking	Up to 24 areas	
Digital Zoom	16x	
Defog	N.A.	On/ Off
<b>Lens</b>		
Focal Length	4.7mm ~ 94.0mm (20x Optical zoom)	4.3mm~129mm (30x Optical zoom)
Max Aperture	F1.6 ~ F3.5	F1.6 ~ F5
Focus Control	Auto / Manual	
Angle of View	H: 55.4°~ 2.9°	H: 58.9°~ 2.1°
Close Focus Distance	10mm ~ 1000mm	10mm ~ 1200mm
<b>PTZ</b>		
Pan/Tilt Range	Pan: 0° ~ 360° endless; Tilt: -2° ~ 90°, auto flip 180°	
Manual Control Speed	Pan: 0.1° ~ 300°/s; Tilt: 0.1° ~250°/s	
Preset Speed	Pan: 400°/s; Tilt: 300°/s	
Preset	80(DH-SD), 255(Pelco-P/D)	
PTZ Mode	5 Pattern, 8 Tour, Auto Pan, Auto Scan	
Speed Setup	Human-oriented focal length/ speed adaptation	
Power up Action	Auto restore to previous PTZ and lens status after power failure	
Idle Motion	Activate Preset/Pan/Scan/Tour/Pattern if there is no command in the specified period	
Time Task	Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time	
Protocol	DH-SD, Pelco-P/D (Auto recognition)	
<b>Video</b>		

## DH-SD6582A/82C-HN

Compression		H.264 / MJPEG	
Resolution		1080P(1920×1080)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)	
Frame Rate	Main Stream	1080P/720P(1 ~ 25/30fps)	
	Sub Stream	D1/CIF(1 ~ 25/30fps)	
Bit Rate		H.264: 56K ~ 8192Kbps, MJPEG: 56K ~ 20480Kbps	
<b>Audio</b>			
Compression		G.711a / G.711u (32kbps) / PCM (128kbps)	
Interface		1/1 channel In/Out	
<b>Network</b>			
Ethernet		RJ-45 (10/100Base-T)	
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
ONVIF		ONVIF Profile S	
Max. User Access		20 users	
Smart Phone		iPhone, iPad, Android, Windows Phone	
<b>Auxiliary Interface</b>			
Memory Slot		Micro SD, Max 64GB	
RS485		1	
Alarm		7/2 channel In/Out	
<b>General</b>			
Power Supply		AC 24V/3A (±10%) (Outdoor) AC 24V/2.2A (±10%) (Indoor in-ceiling)	AC 24V/3A (±10%) / DC12V optional (Outdoor) AC 24V/2.2A (±10%) (Indoor in-ceiling)
Power Consumption		15W, 40W(Heater on)	
Working Environment		-40°C ~ 60°C / Less than 90% RH	
Ingress Protection		IP67 (Outdoor)	
Vandal Resistance		IK10 (optional)	
Dimensions		Φ222(mm) x 322(mm) (Outdoor) Φ211(mm) x 224.6(mm) (Indoor in-ceiling)	
Weight		5.0kg	

# DH-SD6582A/82C-HN

## Dimensions (mm)

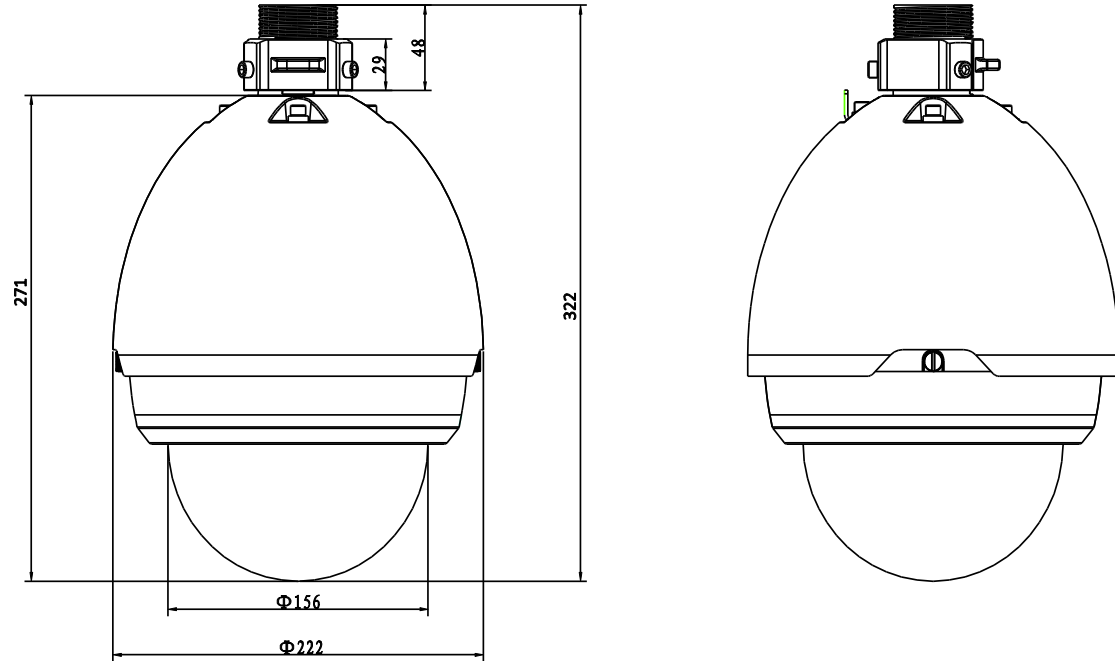


## Accessories

DH-69FB	DH-PFA111	Power Supply

## DH-SD6582A/82C-HN

### Accessories (Optional)

			
DH-PFB300C	DH- PFB301C	DH-PFA112	DH-PFA113
			
DH-PFB301S	DH-PFA120	DH-PFA150	DH-PFA151

---

### Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuasecurity.com](http://www.dahuasecurity.com)

\*Design and specifications are subject to change without notice.

© 2013 Dahua Technology