

Apartment Outdoor Station



Features

- Displayer: 3-inch STN screen or 3.5-inch LCD screen
- Camera: 1.3 mega pixel camera
- Excellent night vision effect
- Aluminum die-casting construction plate
- Call indoor monitor and management centre
- Support contacts call function
- Support open with pass word and IC card
- Support unlock remotely
- Save visitor audio and video function
- Support extension A&C module


Specifications

| Mode | DH-VTO1210A-X | |
|------------------------------|------------------------------------|-------------------------------------|
| System | Main Processor | Embedded micro processor |
| | Operation System | Embedded LINUX OS |
| Video | Video Compression Standard | H.264 |
| | Input/Approaching Induction | 1.3 megapixel CMOS camera |
| | Black Light | Support |
| | Auto Light Compensation | Support |
| Audio | Audio Input | Microphone |
| | Audio Output | Built-in speaker |
| | Bidirectional Talk | Support dual-way bidirectional talk |
| Display | LCD Dimensions | 3-inch STN screen |
| | Resolution | 128*64 |
| Operation Mode | Input | Digital keyboard |
| | Card | Built-in IC card induction reader |
| Approaching Induction | Body Approaching | Not applicable |
| Alarm | Vandal proof | Support |
| Access Control | No Output | Support |
| | NC Output | Support |
| | Door on/off Button | Support |
| | Door Status Detect | Support |
| Network | Ethernet | 10M/100Mbps Self-adaptive |
| | Network Protocol | TCP/IP |
| Storage | Memory | 128MB |
| Others | Power | DC 10~15V |
| | Power Consumption | Standby ≤1W, work ≤10W |
| | Working Environments | -10℃ – +60℃ |
| | | 10% – 95%RH |

DH-VTO1210A-X

| | | |
|--|-------------------|----------------------------------|
| | Dimensions | 376.0mm*150.0mm*59.1mm (L*W*T) ; |
| | Weight | 1.6Kg; |

Dimensions

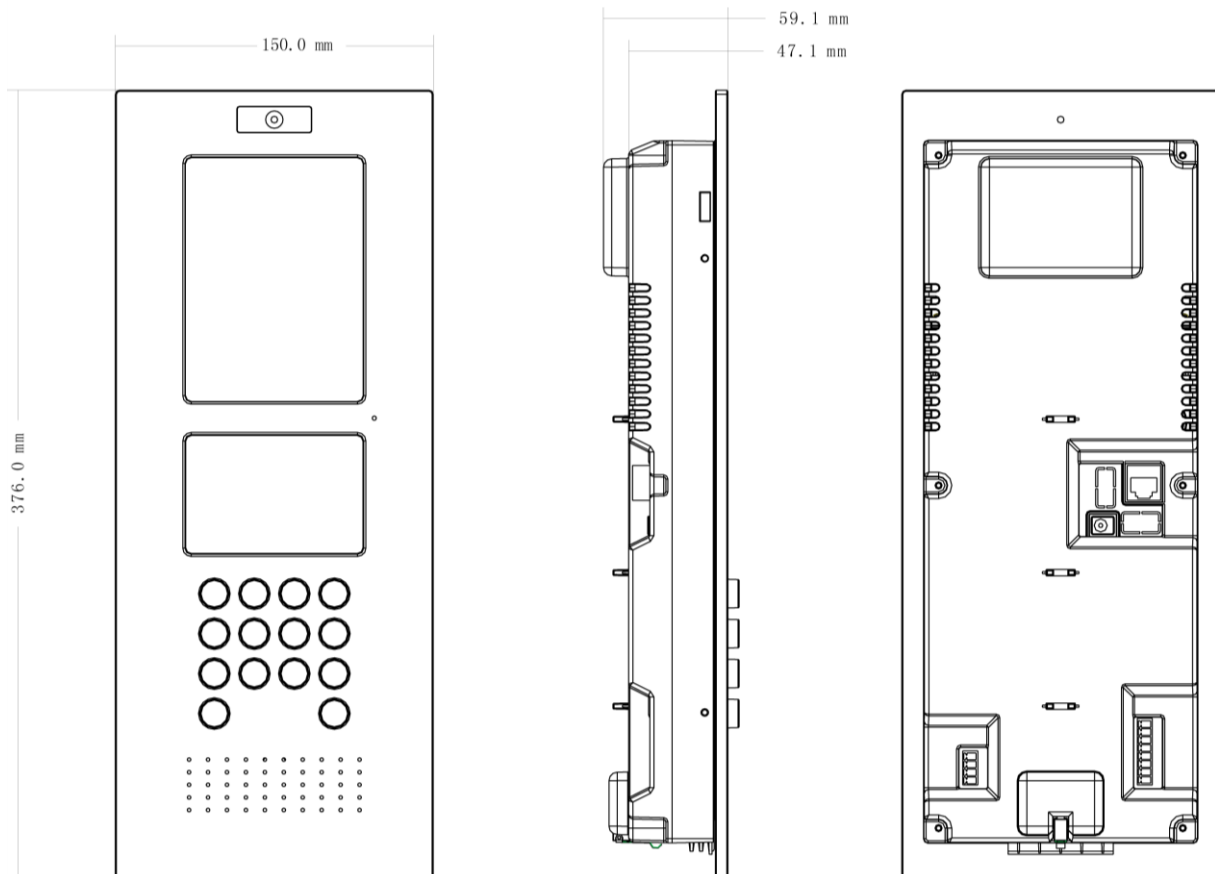

Dahua Technology Co., Ltd.

1187BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com