

DHL32

32" Full-HD LCD Monitor



Product Features

- Industrial Level DID LCD panel, suitable for 7*24 continuous works.
- High contrast and high brightness greatly enhance the video layer, and present the details of the video.
- High fidelity digital processing, brilliant and vivid video.
- Build-in 3D COMB filter and 3D Noise Reduction
- Auto Motion-blur elimination to extend LCD lifespan
- Abundant interfaces, support video loop
- Remote control, software dual control, support remote PC centralized control
- Support Point-to-Point remote control, solve the multiple large-screen video wall control perfectly
- Intelligent brightness control, energy saving
- Using Tamper-proof metal housing, no radiation
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet

Technical Specifications


Model	DHL32
System	
Diagonal	32"(16:9)
Type	S-PVA(HD)
Backlight	CCFL
Resolution	1366×768
Dot Pitch	0.51075(H)×0.51075(V)

DHL32

Luminance(Standard)	450 cd/m ²
Contract	3000:1
Angle of view	178/178
Response Time(Grey Scale)	8ms
Gamut(CIE1931)	72%
Display Color	16.7M/8bit
Saturation	92%
Video & Audio	
Video Input	CVBS(BNC)×2
PC Signal	VGA(D-Sub)×1
Digital Signal	DVI×1 [1080P(1920×1080), downward compatible]
	HDMI×1 [1080P(1920×1080), downward compatible]
Audio Input	—
Audio Output	—
Loop Out	CVBS(BNC)×2
General	
Power Consumption (Standard)	50W
Power Consumption (Maximum)	80W
Power Consumption (Standby)	≤1W
Power Supply	AC100-240V~(+/-10%),50/60 Hz
Control Mode	RS232 Serial control , all way loop , infrared remote control
Bezel Color	Black
Gross Weight	17.6kg
Unit Dimensions(mm)	789.0×484.0×58.2
Active Screen area(mm)	697.68×392.26
Package Dimensions(mm)	890×590×256
Frame Depth (mm)	45.0
Enclosure material	Metal
Installation Mode (all optional)	Base*、 Wall-mounted*、 TV-Wall*、 Ceiling*
Protective Glass/ Touch Screen	Optional
Working Temperature	0°C~50°C
Working Humidity	20%~90%
Stock Temperature	-20°C~60°C
Average Lifespan	50 , 000 hours
Note : *means optional fitting	

DHL32

Dimensions(mm)

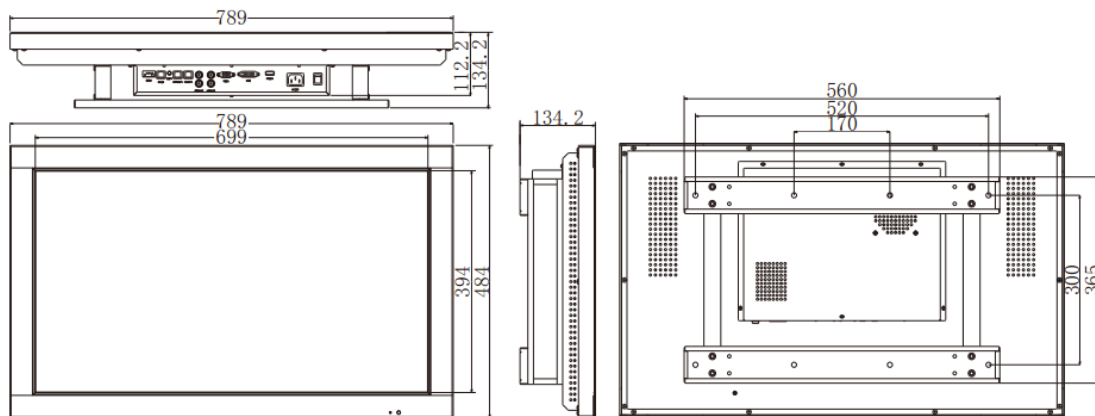

DHL32

Dahua Technology Co., Ltd.

1187 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2013 Dahua Technology Co., Ltd.