

# DH-HAC-HM3100L-F

## 1.3MP Forward HDCVI Mobile Camera



### HDCVI

- Max 30fps@720P
- HD and SD output switchable
- Built-in Mic
- 2.8mm fixed lens
- DC12V



#### System Overview

Experience a 720P mobile video surveillance solution with the simplicity of analog infrastructure. The mobile camera is designed with a shock-proof, compact case, which makes it convenient to install and adaptable to various applications. It offers a high quality image as well as a multi-language OSD. In addition, the camera employs the strengths of HDCVI to ensure real-time transmission.

#### Functions

##### Elaborate Design

DH-HAC-HM3100L-F is designed for application that require front surveillance as a driving recorder which mount on the mobile vehicle's front windshield. For better adapting the applications for vehicles, the mobile camera is designed with micro-sized compact case, which minimizes the interference against on-going activities. Taking aesthetics requirements into consideration, the body and front face of the camera is all-black.

On the other hand this camera can utilise 3M double-sided tape for easy and quick installation instead of traditional screw installation.

##### Audio

The camera is designed with built-mic for realizing audio collection and transmission over the aviation connector cable. Dahua's HDCVI audio compression technology to ensure the synchronization of audio and video. Provides A/V evidence to avoid various incidents caused by oral dispute.

##### Shock-proof

Vibration is inevitable in mobile applications. In order to avoid image or connection failure, the hardware structure of the mobile camera is shock-proof with the certification of EN50155. Plus, the mobile camera adopts M12 aviation connector for stable connection with MCVR.

##### Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. The plug and play approach enables full HD video surveillance without the hassle of configuring a network. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing cabling. On the other hand this camera can utilise double-sided tape for easy and convenient mounting.

#### Signals over 1 Coaxial Cable

HDCVI Mobile Camera supports 4 signals to be transmitted over 1 cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm.

\* Audio input is available for some models of HDCVI cameras.

### Technical Specification

#### Camera

Image Sensor	1/2.7" CMOS
Effective Pixels	1280(H)×720(V), 1.3MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.02Lux/F2.0, 0.002lux/F2.0(B/W)
S/N Ratio	More than 65dB
IR Distance	N/A
IR On/Off Control	N/A
IR LEDs	N/A

#### Lens

Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	2.8mm
Max Aperture	F2.0
Angle of View	H: 116°
Focus Control	N/A

#### DORI Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

	DORI Definition	Distance
Detect	25px/m (8px/ft)	37.3m(122.4ft)
Observe	63px/m (19px/ft)	14.9m(48.9ft)
Recognize	125px/m (38px/ft)	7.5m(24.6ft)
Identify	250ppm (76px/ft)	3.7m(12.1ft)

#### Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° ~ 30° Tilt: 0° ~ 30° Rotation: 0° ~ 360°
-------------------	--

#### Video

Resolution	720P (1280×720)
Frame Rate	PAL:1280×720@50fps, 1280×720@25fps; NTSC:1280×720@60fps, 1280×720@30fps
Video Output	1-channel HDCVI high definition video output (Aviation connector)
Day/Night	Color
OSD Menu	Multi-language

BLC Mode	BLC / HLC / DWDR
WDR	DWDR
Gain Control	AGC
Noise Reduction	2D
White Balance	Auto / Manual

#### Certifications

Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1) EN50155 (EN50121-3-2, IEC61373)
----------------	--

#### Interface

Audio Interface	1-channel Built-in Mic
Aviation Connector Interface	1-power 2-video ground 3-power ground 4-video

#### Electrical

Power Supply	12V DC ±25%
Power Consumption	Max 0.9W

#### Environmental

Operating Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH * Start up should be done at above -40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Ingress Protection & Vandal Resistance	N/A


#### Construction

Casing	Plastic
Dimensions	115.8×99.5×27.4mm (4.56"×3.92"×1.08")
Weight	0.085kg (0.187lb)


**Ordering Information**

Type	Part Number	Description
1MP Camera	DH-HAC-HM3100LP-F-0280B	1MP Forward HDCVI Mobile Camera, PAL
	DH-HAC-HM3100LN-F-0280B	1MP Forward HDCVI Mobile Camera, NTSC

**Aviation Connector**



**Dimensions (mm/inch)**

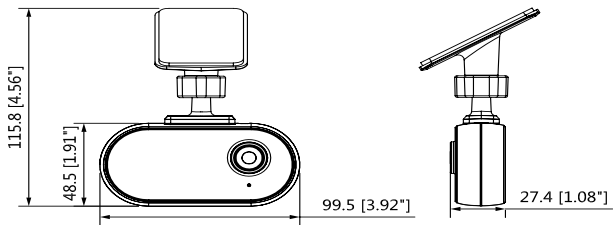

**Installation**

